

FIELD DEMONSTRATION OF BIOLOGICAL
DENITRIFICATION OF POLLUTED GROUNDWATER
and
PILOT SCALE FIELD TESTING OF BIOLOGICAL
DENITRIFICATION WITH WIDELY VARIED
HYDRAULIC LOADING RATES

by
Nevis E. Cook, Jr. and JoAnn Silverstein
Bill Veydovec
Maria Marcia de Mendonca
Roger Sydney

December 1991



Colorado
State
University

Colorado Water Resources
Research Institute

Completion Report No. 162

COLORADO WATER RESOURCES



RESEARCH INSTITUTE

Colorado State University does not discriminate on the basis of race, color, religion, national origin, sex, veteran status or disability, or handicap. The University complies with the Civil Rights Act of 1964, related Executive Orders 11246 and 11375, Title XI of the Education Amendments Act of 1972, Sections 503 and 504 of the Rehabilitation Act of 1973, Section 402 of the Vietnam Era Veteran's Readjustment Act of 1974, the Age Discrimination in Employment Act of 1967, as amended, and all civil rights laws of the State of Colorado. Accordingly, equal opportunity for employment and admission shall be extended to all persons and the University shall promote equal opportunity and treatment through a positive and continuing affirmative action program. The Office of Equal Opportunity is located in Room 314, Student Services Building. In order to assist Colorado State University in meeting its affirmative action responsibilities, ethnic minorities, women, and other protected class members are encouraged to apply and to so identify themselves.

The contents of this publication are the responsibility of the author(s) alone, and do not necessarily reflect the views of the Institute or Colorado State University.

**Field Demonstration of Biological Denitrification of Polluted
Groundwater**

and

**Pilot Scale Field Testing of Biological Denitrification
with Widely Varied Hydraulic Loading Rates**

by

Nevis E. Cook, Jr.
JoAnn Silverstein
Faculty Investigators

Bill Veydovec
Maria Marcia de Mendonca
Roger Sydney
Student Investigators

Department of Civil, Environmental and Architectural Engineering
University of Colorado, Boulder

December 15, 1991

Grant Nos: 14-08-0001-G1551-01
14-08-0001-G1551-04
Project Nos.: 03 and 09

The research on which this report is based was financed in part by the U.S. Department of Interior, Geological Survey, through the Colorado Water Resources Research Institute, and contents of this publication do not necessarily reflect the views and policies of the U.S. Department of Interior, nor does mention of trade names or commercial products constitute their endorsement by the United States Government.

COLORADO WATER RESOURCES RESEARCH INSTITUTE
Colorado State University
Fort Collins, Colorado 80523

Neil S. Grigg, Director

ABSTRACT

Field Demonstration of Biological Denitrification of Polluted Groundwater and Pilot Scale Field Testing of Biological Denitrification with Widely Varied Hydraulic Loading Rates

From 1989 through 1991 a pilot-scale field study of biological denitrification of shallow groundwater was conducted by faculty and students at the University of Colorado at a site in Brighton, Colorado. One purpose of this study was to demonstrate the reliability of the biological process under field conditions, including natural variations in water quality, especially nitrate concentration. A second more specific goal was to study the effect of flow variations on the denitrification process. Especially of interest were large changes in flow resulting from seasonal fluctuations in water use. We have found that the fixed biomass denitrification reactor used in the Brighton study readily adapted to fourfold variation of hydraulic loading rate (1.8 to 7.2 m³/m²/day). At all loading rates, nitrate was reduced from over 13 mg/l to less than 5 mg/l, as N. These findings were significant for two reasons: 1) they have demonstrated that it is not necessary to maintain unused biological capacity to insure consistent denitrification performance during seasonal water demand changes, and 2) the adaptation was not predicted by previous investigators, whose observations were based on short duration experiments.

Final polishing of biologically denitrified water is necessary to remove biomass-generated by-products. We have studied the removal of these contaminants in two downstream processes, a biofilm prefilter and a slow sand filter. The prefilter/slow sand filter combination consistently produced water with turbidity of 0.5 NTU. After maturation, total coliform bacteria were reduced by over 95%; no *E. coli* were ever found. Furthermore, the effluent water had the same organic "fingerprint" as the untreated Brighton water supply, indicating that a polishing process had been developed to reliably produce denitrified water to meet potable standards.

TABLE OF CONTENTS

| | |
|---|----|
| 1. Motivation for Research | 1 |
| 2. Biological Denitrification | 2 |
| 3. Previous Research at the University of Colorado, Boulder | 3 |
| 4. Description of Current Project | 5 |
| 5. Denitrification Reactor Results | 9 |
| 6. Slow Sand Filter Results | 16 |
| 7. Conclusions | 26 |

FIGURES

| | | |
|------------|---|----|
| Figure 1: | Schematic of Pilot Plant..... | 5 |
| Figure 2: | Denitrification Reactor Configuration..... | 7 |
| Figure 3: | Filter Configuration | 8 |
| Figure 4: | Long Term Influent and Effluent Nitrate-Nitrogen Data..... | 9 |
| Figure 5: | Typical DNR Nitrate-Nitrogen Profiles..... | 10 |
| Figure 6: | Half-Order Reaction Coefficients vs. Hydraulic Loading..... | 11 |
| Figure 7: | Reactor Influent Pressure, January - September 1990..... | 12 |
| Figure 8: | Reactor Effluent Suspended Solids, January - July 1990..... | 13 |
| Figure 9: | Reactor Effluent Turbidities, January - July 1990 | 13 |
| Figure 10: | DNR Recovery Profiles after Air Scour ($3.6 \text{ m}^3/\text{hr}/\text{m}^2$)..... | 14 |
| Figure 11: | DNR Recovery Profiles after Air Scour ($7.2 \text{ m}^3/\text{hr}/\text{m}^2$)..... | 15 |
| Figure 12: | Turbidity Profile for Runs 1 - 6 | 17 |
| Figure 13: | Turbidity Profile for Run 7 | 18 |
| Figure 14: | Turbidity Profile for Run 8 | 18 |
| Figure 15: | Turbidity Profile for Run 9 | 19 |
| Figure 16: | TSS Profile for Runs 1 - 6 | 19 |
| Figure 17: | TSS Profile for Run 7 | 20 |
| Figure 18: | TSS Profile for Run 8 | 20 |
| Figure 19: | TSS Profile for Run 9 | 21 |
| Figure 20: | TOC Profile for Runs 1 - 6 | 24 |
| Figure 21: | TOC Profile for Run 8 | 24 |
| Figure 22: | TOC Profile for Run 9 | 25 |
| Figure 23: | Apparent Molecular Weight Distribution for Run 9..... | 26 |

TABLES

| | |
|---|----|
| Table 1: Standard Reactor Operating Conditions for Laboratory Study at C.U. | 4 |
| Table 2: Standard Filter Operating Conditions for Tests Conducted at C.U..... | 4 |
| Table 3: Summary of Brighton Water Characteristics | 6 |
| Table 4: Average Long Term Nitrate-Nitrogen Removals..... | 9 |
| Table 5: Average Half-Order Denitrification Coefficients..... | 10 |
| Table 6: Scoured Biomass..... | 12 |
| Table 7: Short Term Influent and Effluent Nitrate Response ($3.6 \text{ m}^3/\text{hr}/\text{m}^2$) | 14 |
| Table 8: Profile Linear Regression Slopes ($7.2 \text{ m}^3/\text{hr}/\text{m}^2$)..... | 15 |
| Table 9: Short Term Influent and Effluent Nitrate Response ($7.2 \text{ m}^3/\text{hr}/\text{m}^2$) | 16 |
| Table 10: Run Times for SSF Runs 1 - 9..... | 16 |
| Table 11: Presence/Absence of coliforms and E. coli for Run 7 | 21 |
| Table 12: Presence/Absence of coliforms and E. coli for Run 8 | 21 |
| Table 13: Presence/Absence of coliforms and E. coli for Run 9 | 22 |
| Table 14: Total Coliforms for Run 9..... | 22 |
| Table 15: 10 Minute Chlorine Demand for Run 8 | 23 |
| Table 16: Heterotrophic Plate Count for Run 8..... | 23 |

1. MOTIVATION FOR RESEARCH

Nitrate contamination of much of the world's groundwater resources has reached serious levels. As researchers document the acute and chronic health effects of nitrate contamination of drinking water, the need for effective treatment strategies becomes increasingly important. Although current technologies such as reverse osmosis and ion exchange can remove nitrates from drinking water, these processes are not feasible for many communities which are most affected by nitrate pollution, namely small towns in rural and semi-rural areas. For this reason, new nitrate removal methods must be developed which can be successfully implemented by these small communities.

The major acute health concern posed by nitrate contaminated water is the blood disorder methemoglobinemia which is potentially fatal to infants. In infant methemoglobinemia or "blue baby" disease, nitrate is converted to nitrite, which is taken up by hemoglobin to form methemoglobin. Methemoglobin renders red blood cells unable to transport oxygen from the lungs. In infants, nitrate is converted especially efficiently to nitrite and methemoglobin is not destroyed fast enough, leading to oxygen deficiency and possible suffocation (Shuval et al., 1980).

Other chronic health effects of nitrate have been noted, but not as clearly. In adults, nitrates can be converted to N-nitroso compounds by bacteria in the saliva, stomach, or infected urinary bladder. These compounds have been associated with cancers of the stomach, esophagus, nasopharynx, and urinary bladder (Forman, 1989). It has also been suggested that leukemia and non-Hodgkin's lymphoma may be induced by N-nitroso compounds (Weisenburger, 1990).

Because nitrate is very soluble and therefore highly mobile in water, it has become a common groundwater contaminant. The major sources of nitrates in groundwater are agricultural fertilizers (both chemical and natural), certain industrial wastewaters, and municipal waste waters. Nitrate contamination of groundwater is especially a problem for small rural communities where over-fertilization and minimal wastewater treatment have pushed nitrate concentrations to critical levels in many regions.

In Europe, a survey of the nitrate contamination situation in the twelve European Economic Community Member States was presented at a Seminar of the European Institute for Water in 1985. The data indicated a trend of increasing contamination of European waters. An alarming percentage of these waters exceeded the EEC standard of 11.3 mg/l $\text{NO}_3\text{-N}$. The following is a summary of some of the findings (Fried, 1990). (Concentrations of nitrate have most likely increased in the six years since this survey was conducted.)

Belgium - Groundwater concentrations of nitrate ranged from 2.3 mg/l $\text{NO}_3\text{-N}$ in the Ardennes to 22.6 mg/l $\text{NO}_3\text{-N}$ in the Bruxellian sand, with an average concentration of 4.5 to 11.3 mg/l $\text{NO}_3\text{-N}$ in the agricultural zones south of Brussels.

Denmark - Waterworks supplying more than 99% of the drinking water to the population, have shown nitrate concentrations greater than 11.3 mg/l NO₃-N in 8% of the plants.

Germany - Surveys show that 5% of the waterworks supply drinking water with nitrate concentrations in excess of 11.3 mg/l NO₃-N.

France - In 1981, the Ministry of Health found that more than one million people were supplied with water containing nitrate concentrations greater than 11.3 mg/l NO₃-N (approximately 2% of the population). If the present trend were allowed to continue, it was estimated that 20% of the population would be supplied with nitrate contaminated water exceeding 11.3 mg/l NO₃-N by 1995.

In the United States, surveys have found that approximately 5 percent of the private wells sampled had nitrate levels above the U.S. Primary Drinking Water Standard of 10 mg/l NO₃-N. In areas of the country that are heavily farmed, up to 20 percent of the wells exceed the standard (Amsden, U.S. E.P.A.). In Colorado, a recent report of the Colorado Water/Sewer Needs Committee (Colorado Division of Local Government, 1989) categorized the drinking water supplies of Baxter, Brighton, Chambers Subdivision, Fort Lupton, Gilcrest, Hudson, Kim, LaSalle, Milner, Peyton, Platteville, and Southgate as demonstrated health hazards or producing immediate health effects due to high nitrate concentrations.

By law water sources exceeding the nitrate standard of 10 mg/l NO₃-N must be treated. Most nitrate polluted groundwaters which are potential sources of potable water contain between 10 and 40 mg/l NO₃-N. Within this range biological denitrification, using a fixed biofilm reactor with acetic acid as the supplemental carbon source, is economically competitive with ion exchange and reverse osmosis. Furthermore, it avoids the problems of by-product (brine) disposal associated with ion exchange and reverse osmosis, and does not require specially trained operators. The simplicity of operation of fixed biofilm processes makes biological denitrification a suitable choice for water treatment in small communities which do not have the resources to run an ion exchange or reverse osmosis plant.

There are some aspects of potable water denitrification that are significantly different from wastewater processes. One is the requirement for reliability. Another is the concern about bacteria contacting potable supplies (even nonpathogenic bacteria). For these reasons, the following study was undertaken.

2. BIOLOGICAL DENITRIFICATION

Nitrate is removed from water readily by denitrification, a bacterial respiration process which has end products of dinitrogen gas and nitrous oxide (Payne, 1973). Denitrification is carried out by numerous bacterial species found in soil and aquatic environments. These bacteria are primarily facultative heterotrophs, which can respire



using either oxidized nitrogen or oxygen as a terminal electron acceptor. Denitrification is inhibited by the presence of oxygen which is a more energetically favorable electron acceptor for the bacterial cell (Painter, 1970).

Heterotrophs require an organic carbon energy source (electron donor) for respiration. Since most drinking water supplies contain very little organic carbon, supplemental organic carbon must be added to the reactor influent for significant denitrification to occur. The carbon source chosen for the research described here was acetic acid, because of its availability, non-toxicity to humans, solubility in water and the ease with which it is degraded by a broad range of bacterial species. Furthermore, it can be stored without some of the special precautions required for the more flammable organic compounds, methanol and ethanol.

3. PREVIOUS RESEARCH AT C.U., BOULDER

Stoichiometry

Research at the University of Colorado was begun by Nevis Cook, J. Silverstein and Victor Ketellapper (1988) who created a rational theoretical framework for determining the quantity of acetic acid required for complete reaction of all influent nitrate and dissolved oxygen. The stoichiometric equations given below were developed by assuming that 65 percent of the carbon source (acetate) is used for cell production when molecular oxygen is the terminal electron acceptor and that 35 percent of the acetate is converted to cell mass when nitrate is the terminal electron acceptor:



These equations were then verified experimentally using a bench scale packed tower denitrification reactor (Ketellapper, 1988).

Kinetics

A half-order model has been used to model fixed film denitrification kinetics (Harremoës, 1976). The half-order rate expression is:

$$r = -kC^{1/2} \dots \text{Equation (3)}$$

where: C = Substrate concentration (mg/l).

k = Half-order reaction coefficient ((mg/l)^{1/2}/min).

r = Rate of substrate removal (mg/l-min).

From Equation (3), assuming an ideal plug-flow reactor:

$$C^{1/2} = C_0^{1/2} - K\theta_H \dots\dots\dots \text{Equation (4)}$$

where: C = Nitrate nitrogen concentration after detention time θ in the reactor.
 C_0 = Initial (reactor influent) nitrate nitrogen concentration.
 K = Combined half-order reaction coefficient (includes integration constant).
 θ_H = Hydraulic detention time (empty bed).

Reactor

From November 1988 through October 1989, pilot scale tests of a fixed bed denitrification process were conducted by Bill Hogrewe and faculty investigators (1990) in the University of Colorado Environmental Engineering Laboratories. Table 1 shows the standard operating conditions for these tests. Hogrewe et al. developed a procedure for removing excess biomass which allowed continuous reactor operation as well as completing an extensive series of tests to determine the steady state performance of the reactor system with respect to nitrate concentration reduction. Hogrewe verified the half-order kinetic model, with the fitted constant K ranging from 0.025 to 0.049 (mg/l)^{1/2}/min (Hogrewe, 1990).

Table 1: Standard Reactor Operating Conditions for Laboratory Study at C.U.

| | |
|----------------------------|---|
| Influent Nitrate: | 19.5 mg/l NO ₃ -N |
| Influent Dissolved Oxygen: | 2.8 mg/l |
| Influent Acetate: | 90% of stoichiometric |
| Influent Alkalinity: | 200 mg/l as CaCO ₃ added |
| Temperature: | 21 C |
| pH: | 6.5 |
| Flow: | 1.1 l/min. |
| Hydraulic Loading: | 3.63 m ³ /hr./m ² |

Filtration

To demonstrate a filtration technology appropriate for small communities capable of producing water meeting the turbidity and bacteriological standards for potable water, the denitrification reactor effluent was applied to two slow sand filters operated in parallel for a period of three months. During the first month of operation, two different filter configurations were investigated, during which odor and head loss problems arose. For the last two months, the operating conditions summarized in Table 2 were used for both filters (Bram, 1990). The denitrification effluent was also aerated within both of the slow sand filters by using an air stone suspended in the filter influent basin above the filter sand surface.

Table 2: Standard Filter Operating Conditions for Tests Conducted at C.U.


| | |
|---|----------------------|
| Sand Depth: | 1.0 meter (3.25 ft.) |
| Sand Size (D ₁₀): | 0.92 mm (0.036 in.) |
| Uniformity Coefficient (D ₆₀ /D ₁₀): | 2.3 |
| Hydraulic Loading: | 0.08 gpm/sq. ft. |
| Terminal Head: | 1.0 meter (3.25 ft.) |

Both filters achieved effluent turbidity levels consistently below 1.0 NTU after the fifth day of operation. The filters operated for 51 and 59 days respectively before one meter of headloss developed, and the run was stopped (Bram, 1990). This was considered an acceptable run length, demonstrating that slow sand filtration was a viable filtration choice following denitrification and preceding disinfection.

4. DESCRIPTION OF CURRENT PROJECT

Based on the previous research, a field demonstration of the biological denitrification process followed by slow sand filtration was initiated. A simplified schematic of this facility is shown in Figure 1. It was the objective of the project to demonstrate the operation of the plant under conditions which are typical of a small community water supply operation, i.e., significant periods of unattended operation, natural variations of water temperatures and influent nitrate concentrations, and seasonal variations in water demand producing variations in hydraulic loading to the denitrification tower. After slow sand filtration the performance of the plant was expected to produce a high-quality water meeting the Safe Drinking Water Act standards for nitrate, turbidity, and coliform bacterial concentrations.

Figure 1: Schematic of Pilot Plant

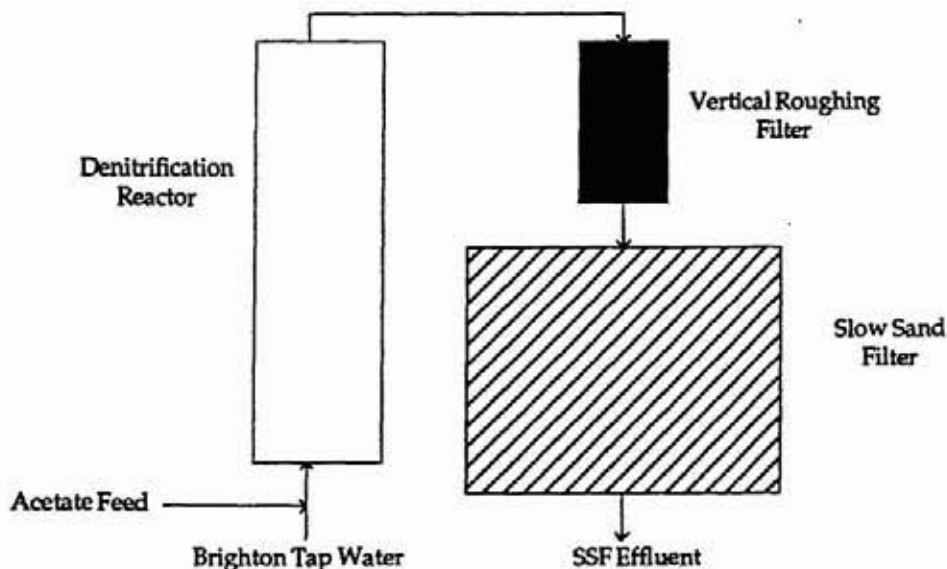

Out of several Weld County communities, Brighton was selected as the final location for the demonstration facility. Brighton's water supply is drawn exclusively from a shallow aquifer with a nitrate-contaminated groundwater which contains between 13 and 17 mg/l nitrate nitrogen (1.3 to 1.7 times the standard). Using Brighton water as an influent to the denitrification reactor provided an excellent opportunity to test the reactor's performance on a naturally occurring contaminated groundwater. A summary of Brighton water characteristics is shown in Table 3.

Table 3: Summary of Brighton Water Characteristics

| | |
|-------------------|---------------------------------|
| Nitrate-Nitrogen: | 13 - 17 mg/l NO ₃ -N |
| Dissolved Oxygen: | 5 - 6 mg/l |
| Temperature: | 15 - 16 C |
| pH: | 7.8 |
| Alkalinity: | 320 mg/l |
| Calcium: | 440 mg/l |
| Sulfate: | 330 mg/l |


Denitrification Reactor (DNR)

The effects of varying the hydraulic loading on the DNR were investigated by Nevis Cook, J. Silverstein and Marcia Mendonca (1991). The long-term (21 day average) performance of the reactor and the short-term (48 hour) response to regular air scour were of primary interest. An investigation into the effects of varying the hydraulic loading rates on a biological denitrification reactor has been previously done by Harremoes (1976). He reported no significant changes in the half-order rate coefficient, K, when hydraulic loading rates ranging from 11.4 to 27.3 m³/hr/m² were applied to a down-flow denitrification packed tower. Based on these results, an increase of the hydraulic loading should result in a decrease of the reactor's performance, i.e., an increase in nitrate concentration in the reactor effluent.

However, an increase in hydraulic loading rate at a constant concentration of nitrate and acetic acid results in an increase in mass loading of both electron donor and electron acceptor to the denitrification reactor. From previous studies (Cook et al., 1990), it was suspected that the reactor could accommodate biofilm growth resulting from long-term changes in hydraulic loading. If this were the case, K would increase and long-term denitrification performance of the reactor would not decrease. Therefore, the primary purpose of these experiments was to test the constancy of K at various hydraulic loadings, as well as to investigate the recovery of the reactor after air scouring procedures.

Operation of the reactor began in January 1990 continuing through May 1991, for a total of 17 months of continuous operation. Figure 2 shows the denitrification reactor configuration. The reactor consisted of a single upflow packed column 15.2 cm in diameter and 5.2 m high. Twelve sample ports were evenly distributed along the length of the reactor (41cm apart), with an additional sample port on the influent line as well. 4.7 meters of the reactor height was packed with a high porosity plastic media (Jaegar Tripack #2). The remaining volume was reserved for bed expansion during the air scour procedure which was periodically carried out to remove excess biomass.

Figure 2: Denitrification Reactor Configuration

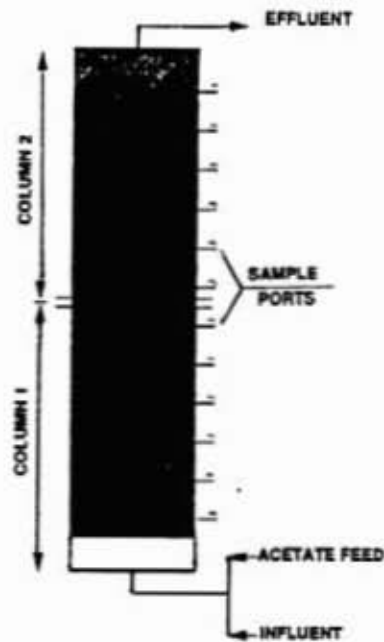

During the period of pilot plant operation, two separate hydraulic loading sequences were performed. In the first sequence, there were three loading periods: from January 22 to May 4, 1990 the hydraulic loading was $3.6 \text{ m}^3/\text{hr}/\text{m}^2$, from May 5 to July 7, 1990 the loading was increased to $7.2 \text{ m}^3/\text{hr}/\text{m}^2$, after July 7, 1990 the loading was reduced back to $3.6 \text{ m}^3/\text{hr}/\text{m}^2$. In the second sequence, performed by graduate students at the University of Colorado (Dunning et al., 1991), there were two periods of constant loading: from January 24 to February 26, 1991 the hydraulic loading was $1.8 \text{ m}^3/\text{hr}/\text{m}^2$, after February 26, 1991 the loading was increased to $11.6 \text{ m}^3/\text{hr}/\text{m}^2$.

Because of the possibility of producing anaerobic conditions in the reactor effluent which could lead to odor problems, and the fact that the nitrate concentration need only be reduced to less than $10 \text{ mg}/\text{l NO}_3\text{-N}$, it was decided to limit the acetic acid feed to 75 percent of the stoichiometric requirement for complete removal of influent dissolved oxygen and nitrate. In addition to avoiding anaerobic conditions in the reactor effluent, this "standard" mode of operation has the advantage of minimizing acetic acid requirements.

For continuous operation of the reactor, it is critical to remove excess biomass which accumulates in the reactor due to bacterial growth. Once every three weeks, a five minute air scour of $0.5 \text{ m}^3/\text{min}$ per m^2 of reactor cross-section was applied. The reactor was then drained, removing any biomass that was loosened during the air scour. The period of time between air scours constituted a cycle, making one cycle equivalent to 21 days of reactor operation.

Two or three times per week, samples of the DNR influent and effluent were analyzed for nitrate using the uV spectrophotometric method (Standard Methods, 1990), as well as for turbidity (Hach 2100A). Once per cycle, a reactor profile was also


analyzed for nitrate. Pressure in the DNR was measured with a pressure gauge connected to sample port #1 at the bottom of the reactor. An ISCO (model 1390) automatic sampler was used to take samples from the DNR effluent every 2 hours for 48 hours after a backwash to form a reactor recovery profile. These results are presented and discussed in Section 5.

Slow Sand Filter (SSF)

The ability of a slow sand filter and a roughing filter + slow sand filter combination to act as a polishing process for DNR effluent was investigated by Nevis Cook, J. Silverstein and Roger Sydney (1991). In particular, the fate of particulates, pathogenic and non-pathogenic bacteria, dissolved and colloidal organic compounds, and chlorine demand in the downstream processes were examined. Run time was also investigated as another important parameter of filter system performance.

Operation of the slow sand filter ran concurrently with the denitrification reactor from January 1990 to May 1991. Figure 3 shows a schematic of the slow sand filter. The slow sand filter stood 2.4 m high, with a cross sectional area of .348 m² (.6 m by .58 m). The filter medium consisted of 90 cm of sand (d = .85mm, uniformity coef. = 1.53), placed over 20 cm of gravel which acted as an underdrain. The effluent outlet was placed 1.4 m from the bottom of the filter providing a minimum water level of 40 cm above the surface of the sand.

Figure 3: Filter Configuration

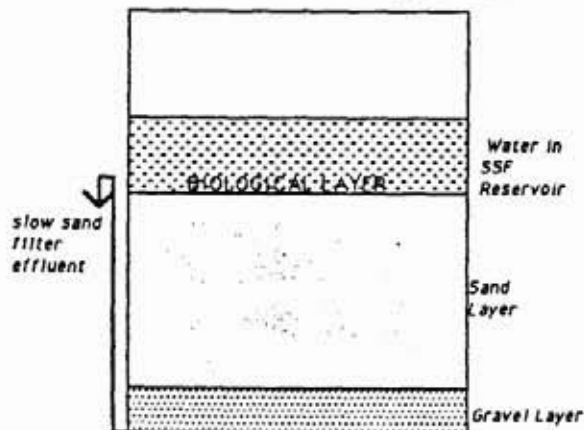

The hydraulic loading on the SSF was maintained at 3.16 l/min.-m² (approximately .08 gal/min-ft²), corresponding to a flow rate of 1.1 l/min. When a headloss of 90 cm above the effluent outlet was achieved, the filter run was terminated and the top layer of sand was removed.

The filter runs can be divided into three categories, runs 1-6 without a roughing filter (RF), runs 7 and 8 with a roughing filter preceding the SSF and run 9 with a roughing filter and with the DNR covered to control algae growth. The roughing filter consisted of a 2.6 m high acrylic cylinder, 15.2 cm in diameter, packed with high rate plastic roughing filter media (Koch Flexirings). The cylinder was covered to prevent

the growth of algae.

Two or three times per week dissolved oxygen, flow rate, nitrate concentration, pH, total organic carbon, total suspended solids, turbidity, temperature, and headloss were measured. The presence or absence of coliform bacteria and E. coli were tested for runs 7, 8, and 9. In addition, chlorine demand and a heterotrophic plate count were conducted for run 8, and an apparent molecular weight distribution of nonpurgable organic carbon was determined for run 9.

5. DENITRIFICATION REACTOR RESULTS

The following is a summary of Mendonca's work on biological denitrification of a nitrate contaminated groundwater in Brighton, Colorado (Mendonca, 1991).

Long Term Results

Figure 4 shows the long term influent and effluent nitrate data. It should be noted that sporadic failures of the feed system occurred during the first 11 days of operation at $7.2 \text{ m}^3/\text{hr}/\text{m}^2$. Table 4 shows the average long term nitrate removal and standard deviations for flow rates of 1.8, 3.6, 7.2, and $11.6 \text{ m}^3/\text{hr}/\text{m}^2$.

Figure 4: Long Term Influent and Effluent Nitrate-Nitrogen Data

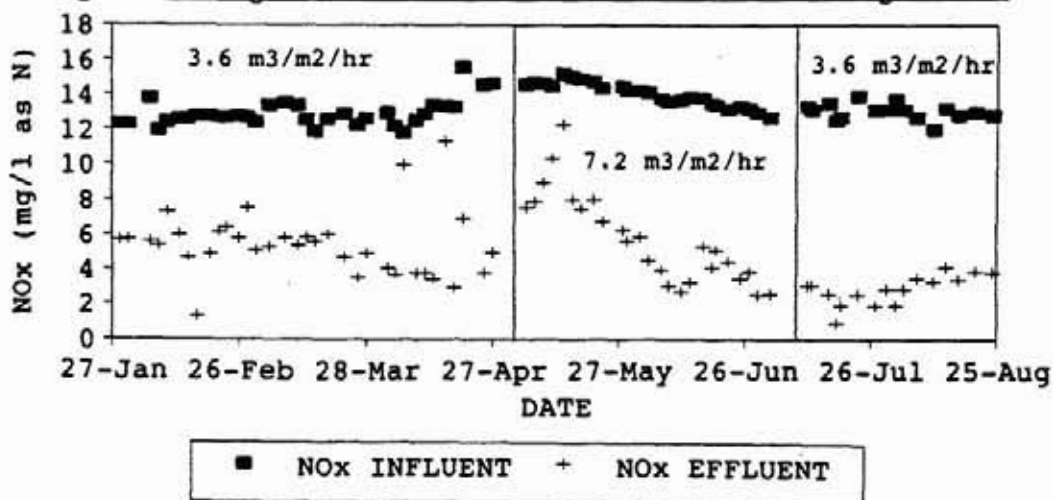


Table 4: Average Long Term Nitrate-Nitrogen Removals

| Hydraulic Loading | 1.8 | | 3.6 | | 7.2 | | 11.6 | |
|-----------------------------------|-----------------------------------|-----------|-----------------------------------|-----------|-----------------------------------|-----------|-----------------------------------|-----------|
| | $\text{m}^3/\text{hr}/\text{m}^2$ | | $\text{m}^3/\text{hr}/\text{m}^2$ | | $\text{m}^3/\text{hr}/\text{m}^2$ | | $\text{m}^3/\text{hr}/\text{m}^2$ | |
| Statistic | Mean | Std. Dev. | Mean | Std. Dev. | Mean | Std. Dev. | Mean | Std. Dev. |
| Influent NO_3 (mg/l - N) | 12.5 | 0.3 | 13.0 | 0.7 | 14.0 | 0.7 | 16.8 | 0.4 |
| Effluent NO_3 (mg/l - N) | 4.4 | 1.0 | 4.6 | 2.0 | 5.7 | 2.5 | 12.0 | 1.2 |
| Removal NO_3 (mg/l - N) | 8.1 | 1.3 | 8.4 | 2.1 | 8.3 | 2.0 | 4.8 | 1.6 |

The system was obviously overloaded at a hydraulic loading of $11.6 \text{ m}^3/\text{hr}/\text{m}^2$, and no other useful results were collected. A t-test was applied to the nitrate removal data (excluding data at $11.6 \text{ m}^3/\text{hr}/\text{m}^2$) and it was concluded with 99% probability that the nitrate removals were the same. These results indicate that the DNR was able to accommodate long term changes in hydraulic loading by increasing the rate of nitrate removal (K) at higher flow rates, thus maintaining nitrate removal performance. It is interesting to note that although the DNR was able to adjust to the higher flow rate, it did take some time for it to reach the same denitrification level achieved at $3.6 \text{ m}^3/\text{hr}/\text{m}^2$. This can be seen in Figure 4 by the steady improvement of the DNR's nitrate removal performance during the $7.2 \text{ m}^3/\text{hr}/\text{m}^2$ period. This seems to indicate that an adjustment period is necessary for the biomass to assimilate to the new loading conditions.

Kinetics

Figure 5 shows typical nitrate profiles for hydraulic loadings of 1.8, 3.6, and $7.2 \text{ m}^3/\text{hr}/\text{m}^2$. Average values of K were calculated for each of the flow rates and are shown in Table 5. The average rate coefficients K_1 , K_2 , and K_3 were compared using a t-test. It was found that K_2 was significantly greater than K_1 , and K_3 was significantly greater than K_2 ($K_1 < K_2 < K_3$), i.e., the half-order reaction rate coefficient appears to be a function of hydraulic loading.

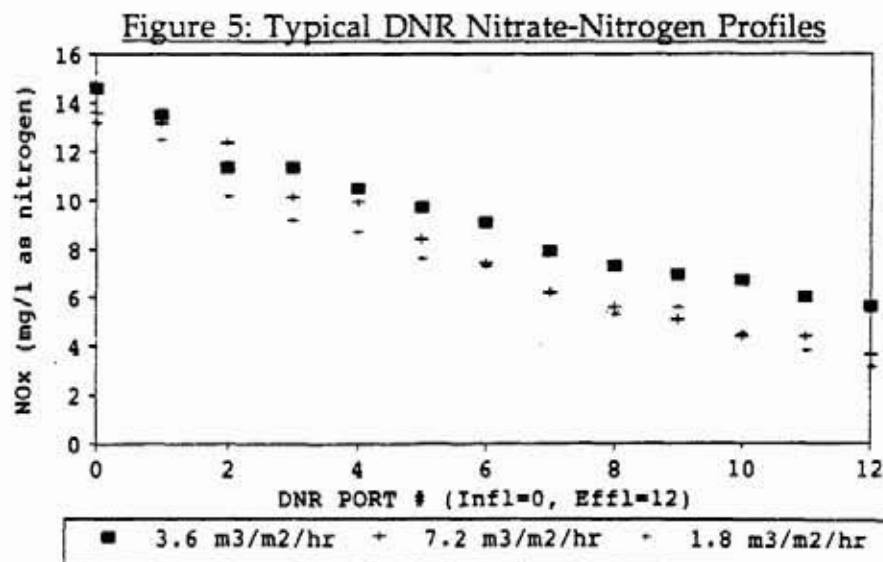



Table 5: Average Half-order Denitrification Coefficients

| Hydraulic Loading ($\text{m}^3/\text{hr}/\text{m}^2$) | K ($(\text{mg}/\text{l})^{1/2}/\text{min}$) | Std. Dev. ($(\text{mg}/\text{l})^{1/2}/\text{min}$) |
|--|--|--|
| 1.8 | .0090 | .0022 |
| 3.6 | .0161 | .0056 |
| 7.2 | .0437 | .0078 |

Figure 6 shows the half-order reaction coefficient as a function of hydraulic loading. This result contradicts Harremoës' (1976) finding that the half-order

denitrification coefficient was unaffected by changes in hydraulic loading. It was speculated that the period of loading in Harremoës' experiments was shorter than the three week minimum periods used for this project, not allowing time for the biomass to adapt to the new loading conditions. While Harremoës did not specify the durations he used, there is some evidence in his 1976 paper that each loading period was very short.

Figure 6: Half-Order Reaction Coefficients vs. Hydraulic Loading

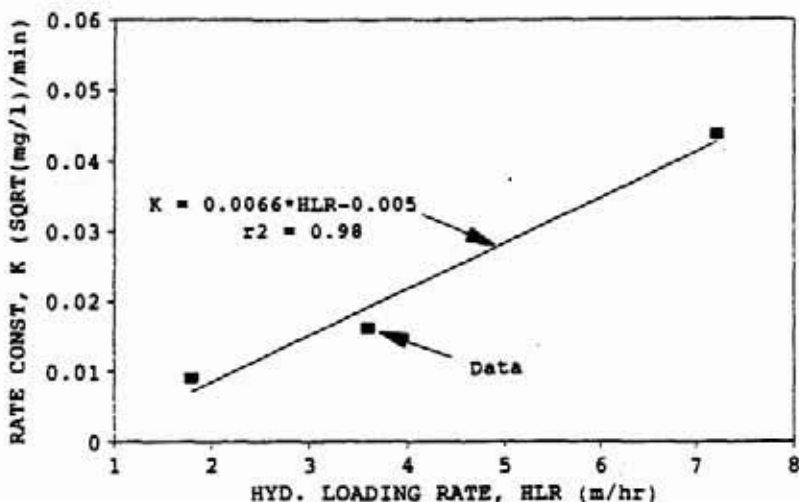


Biomass, Pressure, Effluent Solids and Turbidity

One explanation for the proportional increase in K with flow rate (Figure 6) is that the increase in substrate loading associated with an increase in hydraulic loading resulted in increased DNR biomass growth. In turn, the biological capacity of the DNR was increased, resulting in greater denitrification. This hypothesis is supported directly by scoured solids and DNR pressure results from hydraulic loading periods of 3.6 and 7.2 $\text{m}^3/\text{hr}/\text{m}^2$. Effluent suspended solids and turbidity data from these hydraulic loadings reinforce the conclusion that the DNR biomass is greater at higher hydraulic loading rates.

Biofilm growth is confirmed by the long term DNR pressure profile shown in Figure 7. The general pattern is an increase in pressure from a low value just after air scour to a high value at the end of the 21 day cycle, with the pattern being more pronounced at the higher hydraulic loading (7.2 $\text{m}^3/\text{hr}/\text{m}^2$). Maximum DNR pressure at 3.6 $\text{m}^3/\text{hr}/\text{m}^2$ was approximately 9 psig with a cycle increase of about 1.5 psig. At 7.2 $\text{m}^3/\text{hr}/\text{m}^2$ the maximum DNR pressure was approximately 11 psig with a cycle increase of about 2 psig.

Figure 7: Reactor Influent Pressure, January - September 1990

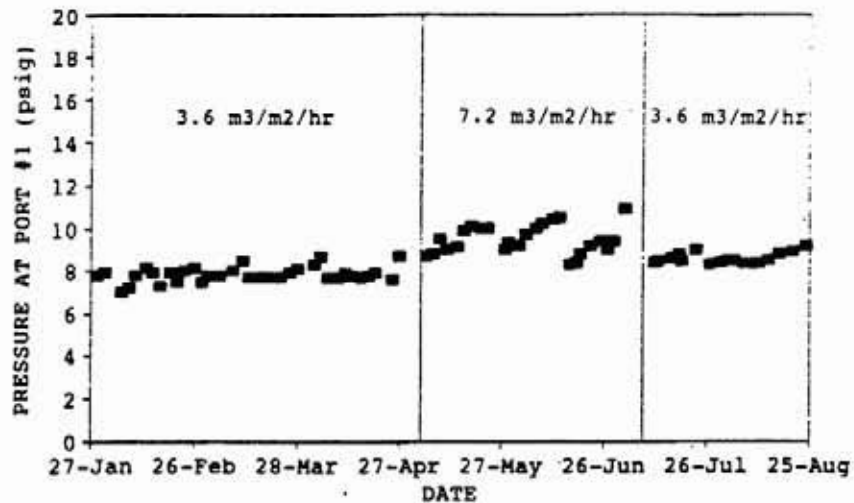


Increased biofilm growth resulting from an increase in hydraulic loading is indicated by an increase in the dry weight of scoured solids drained from the reactor at the higher loading rate. Table 6 shows scoured biomass data for hydraulic loadings of 3.6 and 7.2 m³/hr/m². Scoured biomass is approximately 67% greater at 7.2 m³/hr/m² than at 3.6 m³/hr/m².

Table 6: Scoured Biomass

| Date | Hyd. Loading (m ³ /hr/m ²) | Scoured Biomass (g) | Mean (g) | Std. Dev. (g) |
|---------|---|---------------------|----------|---------------|
| June 14 | 7.2 | 100 | 100 | 1 |
| July 5 | 7.2 | 99 | - | - |
| July 26 | 3.6 | 51 | 59 | 8 |
| Aug. 6 | 3.6 | 67 | - | - |
| Aug. 27 | 3.6 | 59 | - | - |


The biomass increase at 7.2 m³/hr/m² had a marked effect on the effluent suspended solids. Figure 8 shows that at a hydraulic loading of 7.2 m³/hr/m² the effluent suspended solids increased to more than three times the average at 3.6 m³/hr/m². It is interesting to note that the effluent suspended solids at 2.2 l/min did not start to increase until after the first cycle, reinforcing the theory that it takes time for the biomass to adjust to the new loading conditions.

Figure 8: Reactor Effluent Suspended Solids, January - July 1990

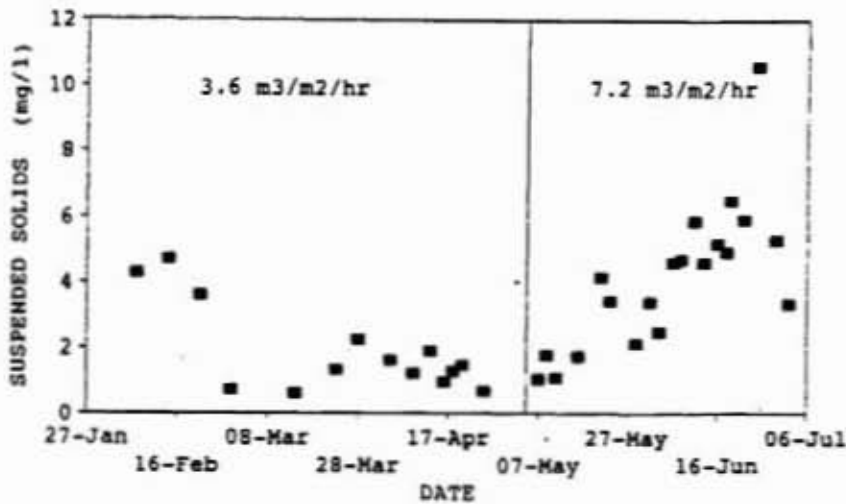

The biomass increase also had an effect on the effluent turbidity. Figure 9 shows effluent turbidities for hydraulic loadings of 3.6 and 7.2 m³/hr/m². It can be seen that the effluent turbidity during the 7.2 m³/hr/m² loading period gradually increased until it was double the effluent turbidity at 3.6 m³/hr/m². Once again this increase did not begin until after the first cycle at 7.2 m³/hr/m², further reinforcing the theory that it takes time for the biomass to adjust to the new loading conditions.

Figure 9: Reactor Effluent Turbidities, January - July 1990

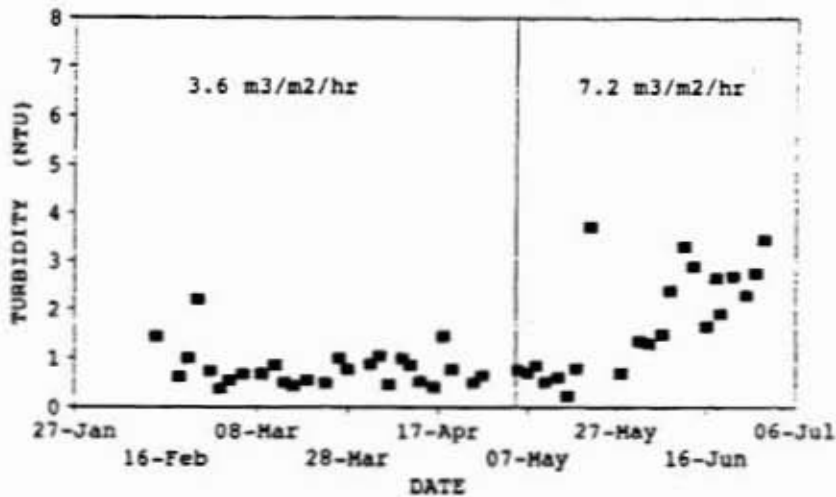

Short Term Response

It was expected that immediately after air scour the denitrification performance of the DNR would decrease for a short period while the biomass recovered before returning to the performance previous to the air scour. It was discovered that the recovery behavior of the DNR operating at a hydraulic loading of 3.6 m³/hr/m² differed from the recovery of the DNR operating at 7.2 m³/hr/m².

3.6 m³/hr/m²

The recovery results for the 3.6 m³/hr/m² flow rate presented and discussed here are from the period of operation from July 8 to August 29. These results were selected because the water temperature during this period was comparable to that of the June - July experiments at 7.2 m³/hr/m². Surprisingly, it was found that the denitrification performance of the DNR operating at 3.6 m³/hr/m² showed no decrease after air scour. Figure 10 shows two DNR recovery profiles. Although some variations in nitrate concentration occur in the profiles, the concentration in the first sample of a profile does not differ significantly from the concentration in the last sample of the profile taken over 40 hours later. This is indicated by the relatively flat appearance of the profiles in Figure 10. Statistical analysis of the profile data shown in Table 7 verified that the average of the recovery data was identical (99% probability) to the long term average denitrification during that same period (July 27 - Aug. 28). Thus, it appears that the denitrification capacity of the DNR operating at 3.6 m³/hr/m² was not exceeded even though the biomass had been vigorously stripped by the air scour procedure.

Figure 10: DNR Recovery Profiles after Air Scour (3.6 m³/hr/m²)

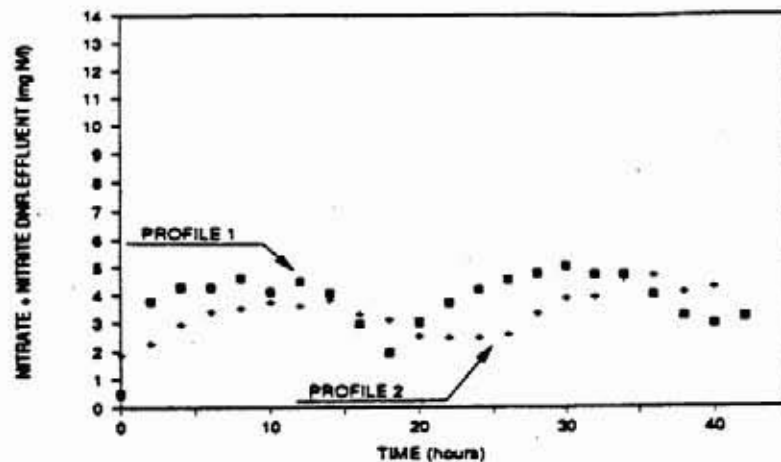



Table 7: Short Term Influent and Effluent Nitrate Response (3.6 m³/hr/m²)

| Hyd. Loading 3.6m ³ /hr/m ² | Profile 1 Aug. 6 - 8 | | Profile 2 Aug. 27 - 29 | | Long Term Denit. | |
|--|-------------------------|--------------|---------------------------|--------------|---------------------|--------------|
| | Mean x ₁ | Std. Dev. | Mean x ₂ | Std. Dev. | Mean | Std. Dev. |
| Influent NO ₃ (mg/l - N) | 13.0 | 0.4 | 13.0 | 0.4 | 13.0 | 0.4 |
| Effluent NO ₃ (mg/l - N) | 3.4 | 0.8 | 3.8 | 1.0 | 3.0 | 1.1 |
| Removal NO ₃ (mg/l - N) | 9.7 | 0.8 | 9.2 | 1.0 | 10.0 | 1.1 |

7.2 m³/hr/m²

The recovery response of the DNR operating at a hydraulic loading of 7.2 m³/hr/m² was significantly different than the response at 3.6 m³/hr/m². Figure 11 shows three recovery profiles. In the first two profiles, taken on May 24 - 26 and June 14 - 16, the nitrate concentration in the first sample taken immediately after air scour is significantly greater than the nitrate concentration in the last sample taken 40 hours later. But, by the third cycle, after six weeks of operation, the profile (taken July 5 - 7) was much flatter (as in the profiles shown for 3.6 m³/hr/m²).

Figure 11: DNR Recovery Profiles after Air Scour (7.2 m³/hr/m²)

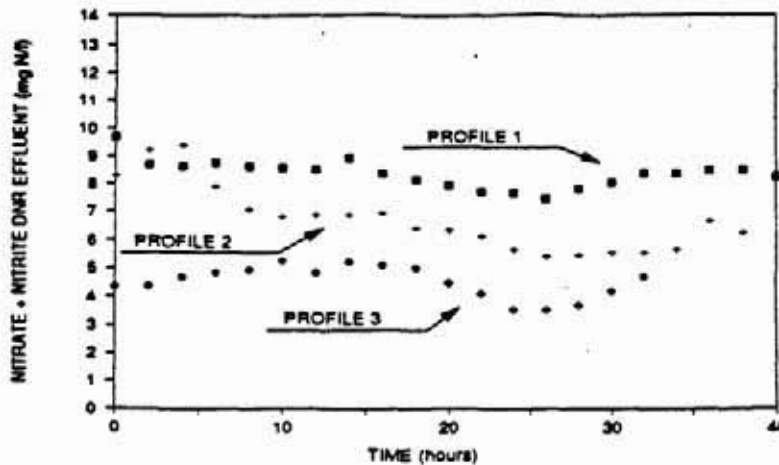

To verify the slope observations made above, linear regressions were performed on each profile. The results of these regressions are shown in Table 8. Using a t-test, it was concluded that $\beta_1 < 0$ and $\beta_2 < 0$, indicating steady improvement in denitrification over the 48 hour recovery period. But, it was determined with 99% probability that $\beta_3 = 0$, indicating no improvement in denitrification during the recovery period and suggesting no decline in the denitrification performance of the DNR after air scour.

Table 8: Profile Linear Regression Slopes (7.2 m³/hr/m²)

| | Profile 1 May 24 - 26 | Profile 2 * June 14 - 16 | Profile 3 July 5 - 7 |
|---------------|--------------------------|-----------------------------|-------------------------|
| Slope (B) | -0.6 | -0.8 | -0.1 |
| y - intercept | 8.8 | 7.1 | 4.7 |

* Note: Samples 1, 2, and 3 were not considered.

It appears from Figure 11 that the average denitrification performance of the reactor after air scour improved after each cycle. This trend was verified by making a statistical comparison of the average nitrate removals, shown in Table 9, for each profile. It was determined with 99% probability that the average denitrification (nitrate removal) in the profiles increased from profile 1 to profile 2 to profile 3, i.e., $x_1 < x_2 < x_3$. In addition, the average denitrification data from profile 3 is similar to the long term average denitrification for the 7.2 m³/hr/m² period. It appears that the DNR

adapted to the higher loading rate after the third cycle, and is performing much as it did at a flow rate of 3.6 m³/hr/m².

Table 9: Short Term Influent and Effluent Nitrate Response (7.2 m³/hr/m²)

| Hyd. Loading 7.2 m ³ /hr/m ² | Profile 1 May 24 - 26 | | Profile 2 June 14 - 16 | | Profile 3 July 5 - 7 | |
|---|--------------------------|--------------|---------------------------|--------------|-------------------------|--------------|
| | Mean x ₁ | Std. Dev. | Mean x ₂ | Std. Dev. | Mean x ₃ | Std. Dev. |
| Influent NO ₃ (mg/l - N) | 14.0 | 0.7 | 14.0 | 0.7 | 14.0 | 0.7 |
| Effluent NO ₃ (mg/l - N) | 8.3 | 0.5 | 6.3 | 0.6 | 4.6 | 0.5 |
| Removal NO ₃ (mg/l - N) | 5.7 | 0.5 | 7.8 | 0.6 | 9.4 | 0.5 |

6. SLOW SAND FILTER RESULTS

The following is a summary of Sydney's work on slow sand filtration of a biologically denitrified water in Brighton, Colorado (Sydney, 1991).

Run Time

Table 10 shows the run durations for slow sand filter runs 1 through 9. The durations of runs 1 - 6 were unacceptably short (average of 11 days). It was theorized that the high organic carbon loading on the SSF led to intense microbiological activity, clogging the SSF with a thick biofilm growth and that a reduction of the organic carbon loading would lead to longer run times. An aerobic biofilm reactor (trickling filter) was placed upstream of the SSF to act as a roughing filter to reduce the organic carbon loading on the SSF. During run 8, algae growth was apparent in the DNR, so for run 9 the DNR was covered to investigate the effect of algae growth in the DNR on the SSF run times.

Table 10: Run Times for SSF Runs 1 - 9.

| SSF Run | Start Date | End Date | Number of Days |
|-------------------------|------------|----------|----------------|
| 1 | 1/22 | 1/29 | 7 |
| 2 | 1/31 | 2/12 | 12 |
| 3 | 2/13 | 2/26 | 13 |
| 4 | 2/26 | 3/05 | 7 |
| 5 | 3/08 | 3/19 | 11 |
| 6 | 3/23 | 4/09 | 17 |
| Average for Runs 1 - 6: | | | 11 |
| 7 | 5/29 | 7/07 | 39 |
| 8 | 7/09 | 8/24 | 46 |
| 9 | 8/25 | 12/04 | 101 + |

The addition of the roughing filter led to a dramatic increase in the SSF run times confirming the theory that high organic carbon loading played a role in the short durations of runs 1 - 6. Runs 7 and 8 had durations of 39 and 46 days respectively. Another dramatic increase in run time occurred during run 9 (with the DNR covered) which ran for 101 days before being terminated with a headloss of only 10 cm, leaving 80 cm still available. This result demonstrated the importance of algae control if maximum SSF run times are to be achieved.

Turbidity

Figures 12, 13, 14, and 15 show turbidity profiles for SSF runs 1 - 6, 7, 8, and 9 respectively. The SSF performed very well with respect to turbidity removal. It can be seen from the turbidity profiles that under widely varying turbidity conditions in the SSF reservoir, the SSF consistently produced an effluent with a turbidity less than the MCL of 1.0 NTU and often produced an effluent with a turbidity less than 0.5 NTU.

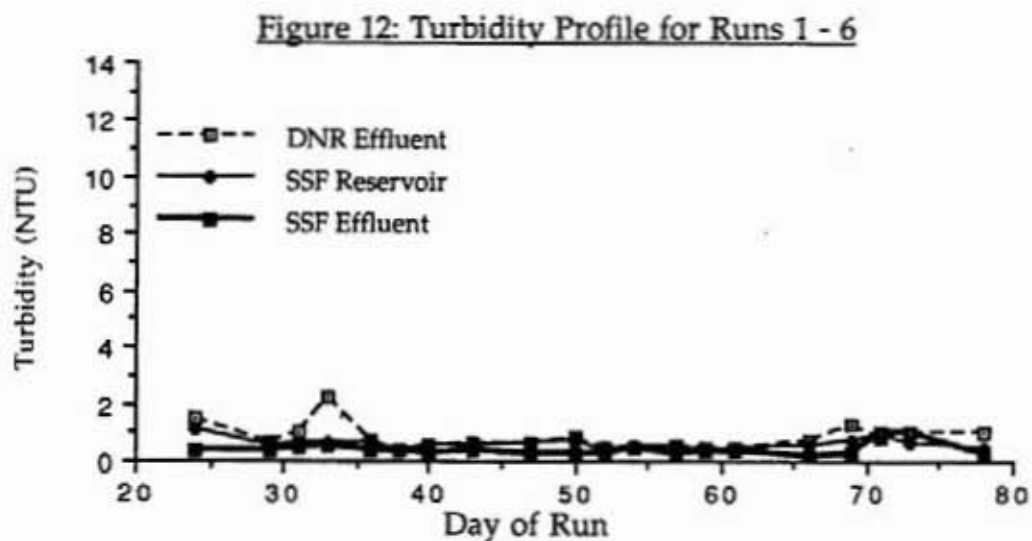


Figure 13: Turbidity Profile for Run 7

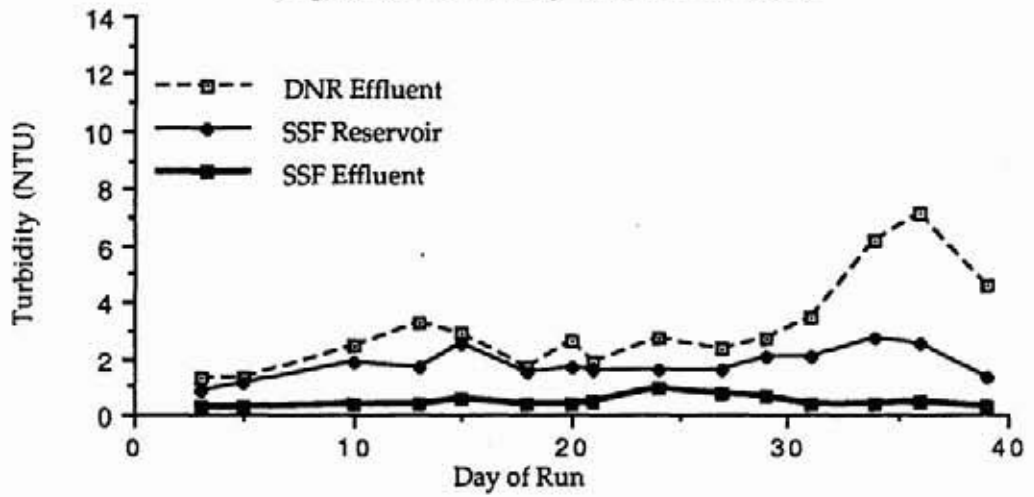


Figure 14: Turbidity Profile for Run 8


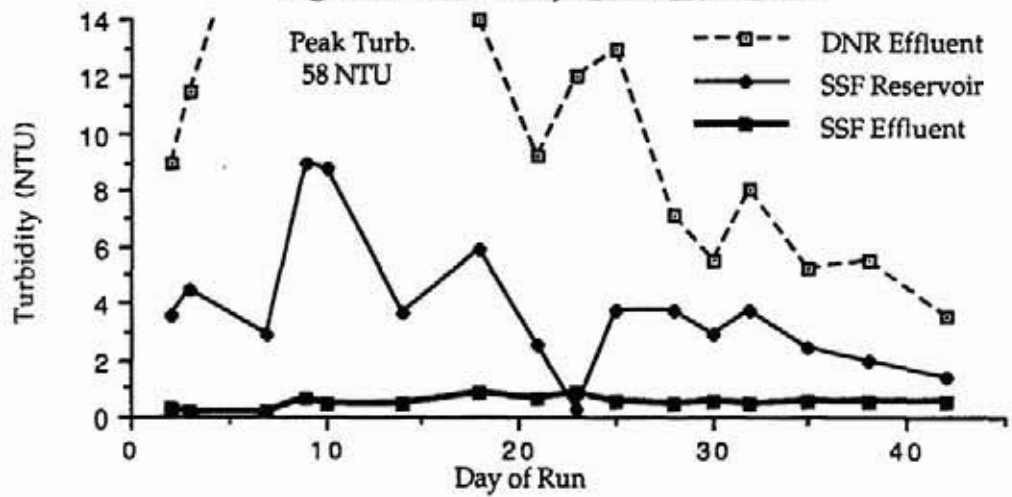


Figure 15: Turbidity Profile for Run 9

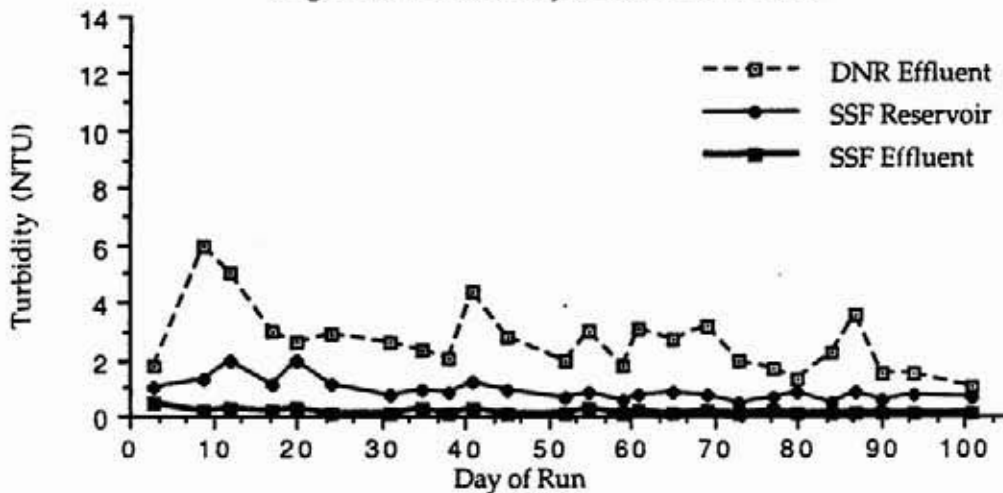

Total Suspended Solids (TSS)

Figures 16, 17, 18, and 19 show total suspended solids profiles for runs 1 - 6, 7, 8, and 9 respectively. During runs 1 - 6, the SSF did not remove TSS very efficiently, but after the installation of the roughing filter (runs 7 - 9), the SSF consistently produced an effluent with a TSS concentration less than 1.0 mg/l.

Figure 16: TSS Profile for Runs 1 - 6

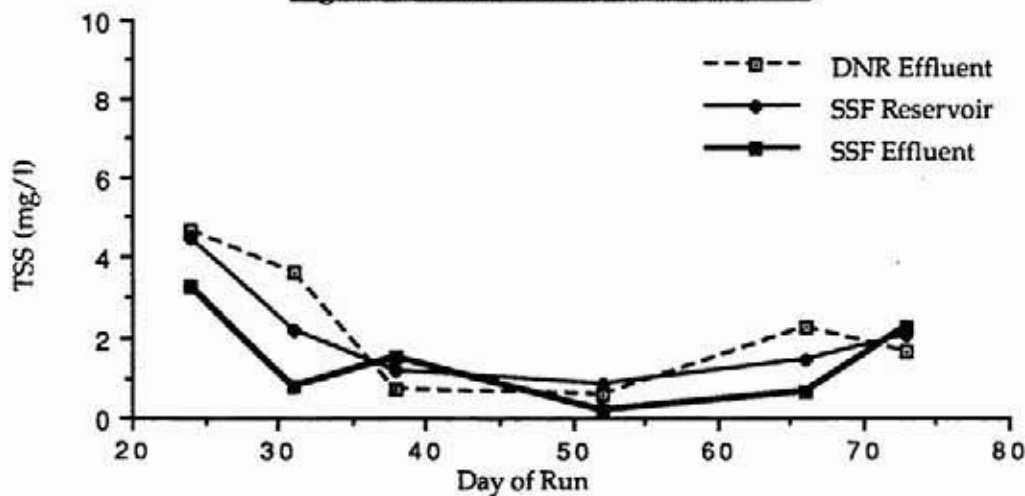


Figure 17: TSS Profile for Run 7

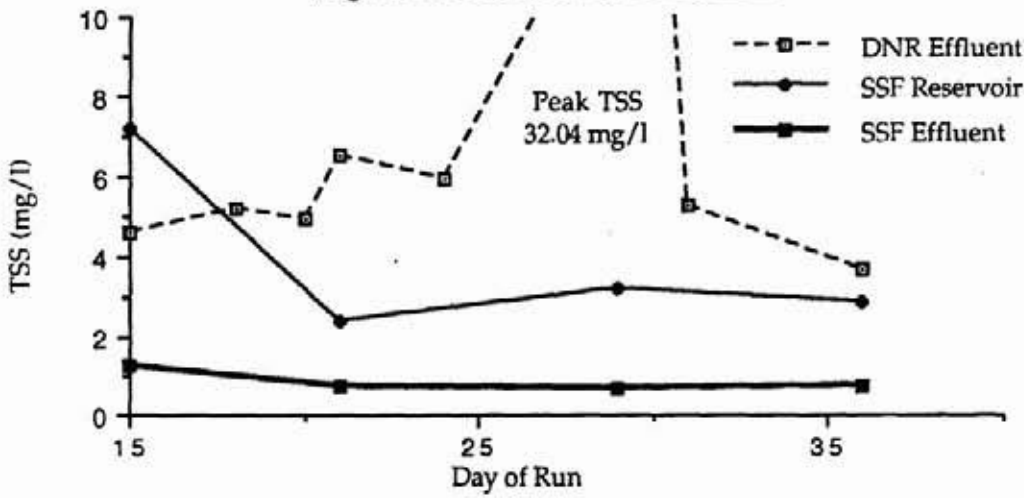


Figure 18: TSS profile for Run 8


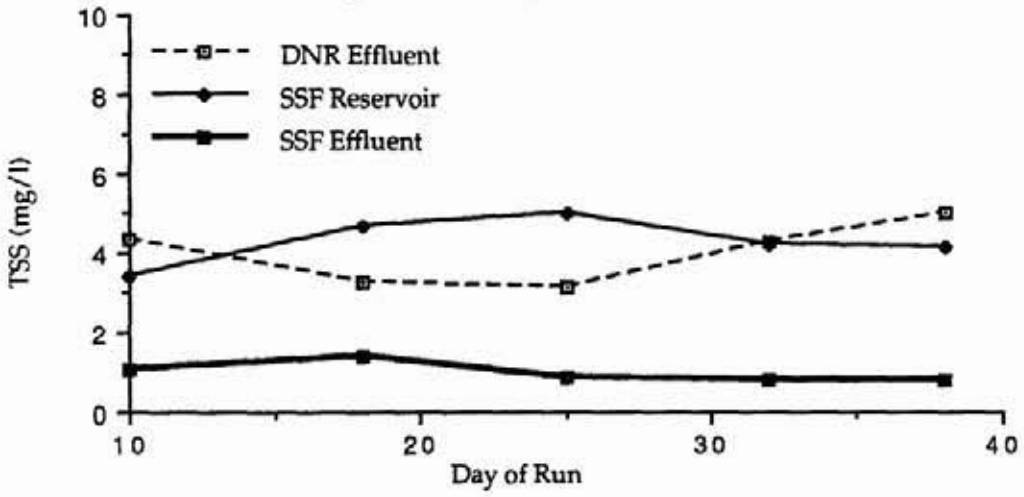


Figure 19: TSS Profile for Run 9

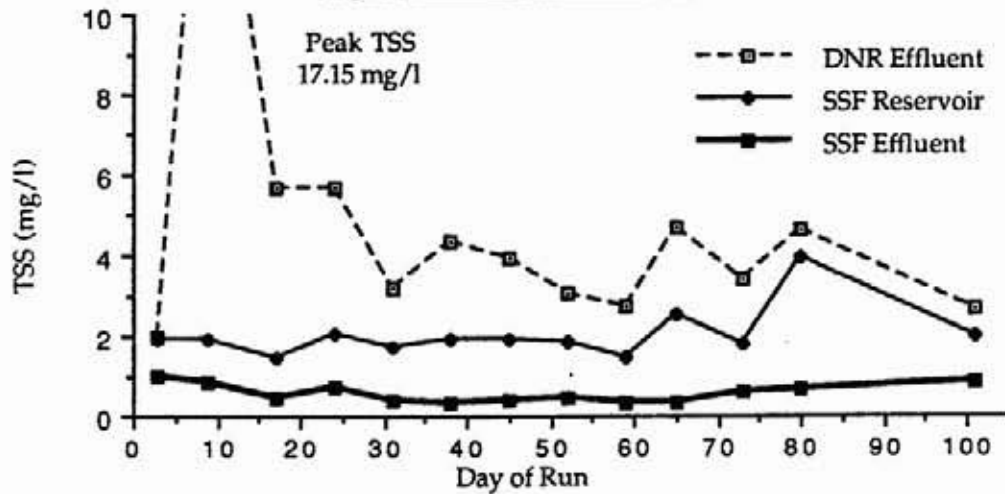

Coliform Bacteria

The presence or absence of coliform bacteria and *E. coli* were investigated for runs 7, 8, and 9. In addition to determining the presence or absence of coliforms, total coliforms were found for run 9. Tables 11, 12, and 13 show the results of the presence/absence tests performed for run 7, 8, and 9 respectively, and Table 14 shows the results of the total coliform investigations performed during run 9.

Table 11: Presence/Absence of coliforms and *E. coli* for Run 7

| Date | Dilution | Coliforms | | <i>E. coli</i> | |
|------|----------|-----------|----------|----------------|----------|
| | | DNR Eff. | SSF Eff. | DNR Eff. | SSF Eff. |
| 6/13 | 0 | + | - | - | - |
| 6/19 | 0 | - | - | - | - |
| 6/27 | 0 | + | + | - | - |
| 7/04 | 0 | + | + | - | - |

Table 12: Presence/Absence of coliforms and *E. coli* for Run 8

| Date | Dilution | Coliforms | | <i>E. coli</i> | |
|------|----------|-----------|----------|----------------|----------|
| | | DNR Eff. | SSF Eff. | DNR Eff. | SSF Eff. |
| 7/16 | 0 | + | + | - | - |
| 7/23 | 0 | + | + | - | - |
| 7/23 | 1/10 | + | + | - | - |
| 7/23 | 1/100 | + | + | - | - |

Table 13: Presence/Absence of coliforms and *E. coli* for Run 9

| Date Dilution | Coliforms | | <i>E. coli</i> | |
|------------------|-----------|----------|----------------|----------|
| | DNR Eff. | SSF Eff. | DNR Eff. | SSF Eff. |
| 9/03 | 0 | + | - | - |
| 9/11 | 0 | + | - | - |
| 9/18 | 0 | + | - | - |
| 9/25 | 0 | + | - | - |
| 10/02 | 0 | + | - | - |
| 10/09 | 0 | + | - | - |
| 10/09 | 1/10 | NA | NA | - |
| 10/09 | 1/100 | NA | NA | - |
| 10/16 | 0 | + | - | - |
| 10/16 | 1/10 | NA | NA | - |
| 10/16 | 1/100 | NA | NA | - |
| 10/23 | 0 | + | - | - |
| 10/23 | 1/10 | NA | NA | - |
| 10/23 | 1/100 | NA | NA | - |
| 10/29 | 0 | + | - | - |
| 10/29 | 1/10 | NA | NA | - |
| 10/29 | 1/100 | NA | NA | - |

Table 14: Total Coliforms for Run 9

| Date | DNR Eff. | SSF Eff. | % Reduction |
|-------|----------|----------|-------------|
| 8/28 | 930 | 450 | 51.6 |
| 9/03 | 330 | 160 | 51.5 |
| 9/11 | 570 | 23 | 96.0 |
| 9/18 | 1000 | 10 | 99.0 |
| 9/25 | 240 | 5 | 97.9 |
| 10/02 | 200 | 10 | 95.0 |

Coliform bacteria were present in the SSF effluent on all but two occasions when the sample was undiluted, and at no time were *E. coli* ever discovered. When the samples were diluted to 1/100 for tests run during run 9, only 1 out of 4 results indicated the presence of coliforms, suggesting a coliform concentration of less than 2 logs/ml in the SSF effluent.

The results shown in Table 14 indicate an increase in coliform removal efficiency from approximately 51% to 95% as run time increased. This increase in efficiency is probably due to the maturation of the SSF's biofilm layer or schmutzdecke, leading to an increase in the SSF's pathogenic removal capacity. These results also confirm that the SSF effluent contains an average coliform concentration of less than 2 logs/ml once the filter matures.

Chlorine Demand

The 10 minute chlorine demand was measured four times during run 8. The results of these measurements are shown in Table 15.

Table 15: 10 Minute Chlorine Demand for Run 8

| Date | Day of Run | SSF Reservoir (mg/l) | SSF Effluent (mg/l) |
|------|------------|----------------------|---------------------|
| 7/16 | 7 | 3.4 | 2.4 |
| 7/24 | 15 | 6.5 | 4.3 |
| 8/06 | 28 | 2.1 | 2.7 |
| 8/14 | 36 | 13.9 | 3.5 |

The SSF effluent had an average chlorine demand of 3.2 mg/l. The wide variations in the chlorine demand of the SSF reservoir may have been caused by the presence of algae. Even with these variations, the SSF produced an effluent with a fairly consistent 10 minute chlorine demand.

Heterotrophic Plate Count

Heterotrophic plate counts were conducted four times during run 8. The results of these counts is shown in Table 16. The results indicate a fairly consistent SSF reservoir and effluent count.

Table 16: Heterotrophic Plate Count for Run 8

| Date | Day of Run | SSF Res. (cfu/ml) | SSF Eff. (cfu/ml) | SSF Res. (log/ml) | SSF Eff. (log/ml) |
|----------|------------|-------------------|-------------------|-------------------|-------------------|
| 7/23 | 14 | 6.0E+5 | 9.3E+3 | 5.78 | 3.97 |
| 7/30 | 21 | 4.9E+5 | 2.2E+5 | 5.69 | 5.34 |
| 8/06 | 28 | 1.2E+4 | 1.6E+4 | 4.08 | 4.20 |
| 8/14 | 36 | 7.0E+5 | 7.1E+3 | 5.85 | 3.85 |
| Average: | | 4.5E+5 | 6.3E+4 | | |

Total Organic Carbon (TOC)

Figures 20, 21, and 22 show TOC profiles for runs 1 - 6, 8, and 9 respectively. A TOC profile was not produced for SSF run 7. Several interesting observations can be made about these figures.

Figure 20: TOC Profile for Runs 1 - 6

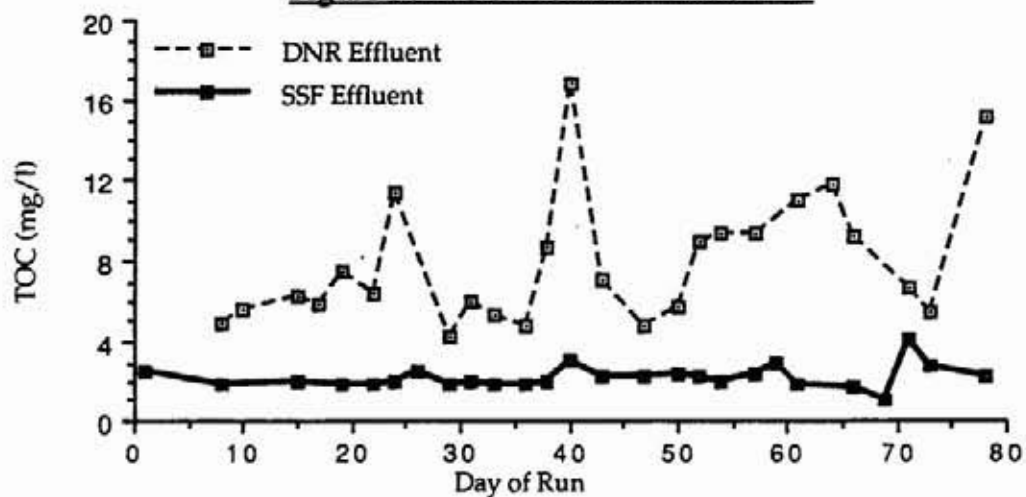


Figure 21: TOC Profile for Run 8


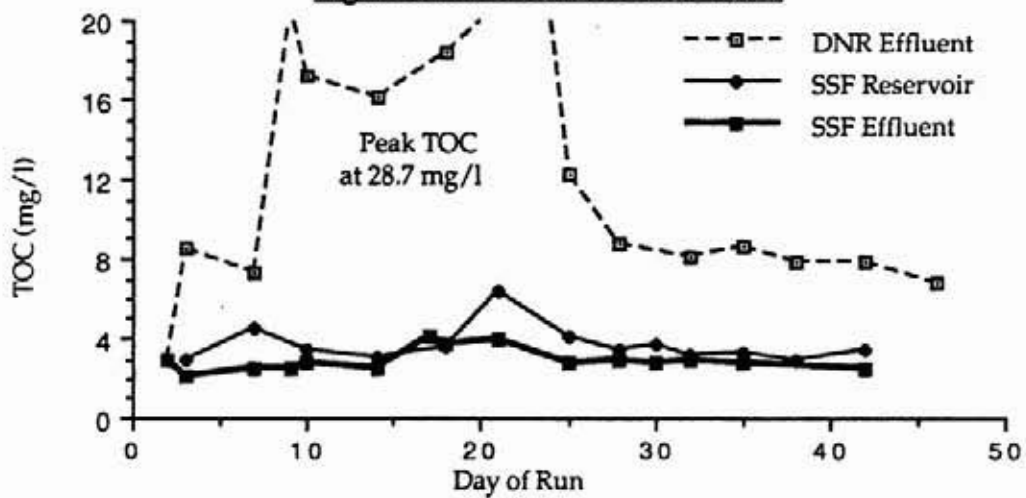


Figure 22: TOC Profile for Run 9

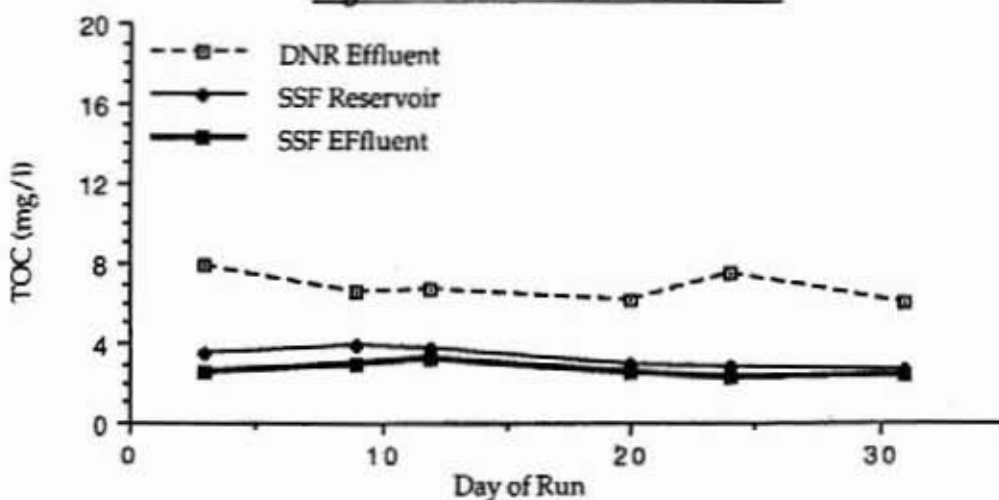

The roughing filter was very effective at removing organic carbon. Figures 21 and 22 show that most of the TOC removed by the polishing process (RF + SSF) during runs 8 and 9 was removed by the roughing filter, with only a small amount subsequently removed by the SSF. It can be seen in Figure 20 that without the roughing filter, the SSF was capable of reducing the TOC to approximately the same levels as in runs 8 and 9, but at the expense of run time.


The roughing filter also proved to be very effective at protecting the SSF from organic carbon spikes. Figure 21 shows a region of high TOC in the DNR effluent due to an accidental overfeeding of acetic acid to the DNR from days 9 to 28. The roughing filter almost completely reduced this TOC spike, protecting the SSF from a high organic carbon loading and a possible decrease in run time.

It was interesting that the TOC concentration in the SSF effluent was very consistent for all of the runs, averaging 2.5 mg/l (std. dev. = 0.6). Because of this consistency and the low TOC removal by the SSF in runs 8 and 9, it was theorized that the TOC remaining in the SSF effluent was not very biodegradable and was possibly present in the DNR influent (Brighton tap water).

Apparent Molecular Weight Distribution of Total Nonpurgable Organic Carbon

To better understand the addition and removal of nonpurgable organic carbon (NPOC) throughout the system, an investigation of the apparent molecular weight (AMW) distribution of total NPOC was conducted during run 9. The distribution was determined for samples taken from Brighton tap water, the DNR effluent, the SSF reservoir, and the SSF effluent. The results are shown in Figure 23. It is important to note that the NPOC for the SSF effluent and Brighton tap water were measured on different days than the DNR effluent and SSF reservoir (Brighton tap water (12/04/90), SSF Effluent (11/27/90), DNR Effluent (11/6/90), SSF Res. (11/6/90)).

Figure 23: Apparent Molecular Weight Distribution for Run 9

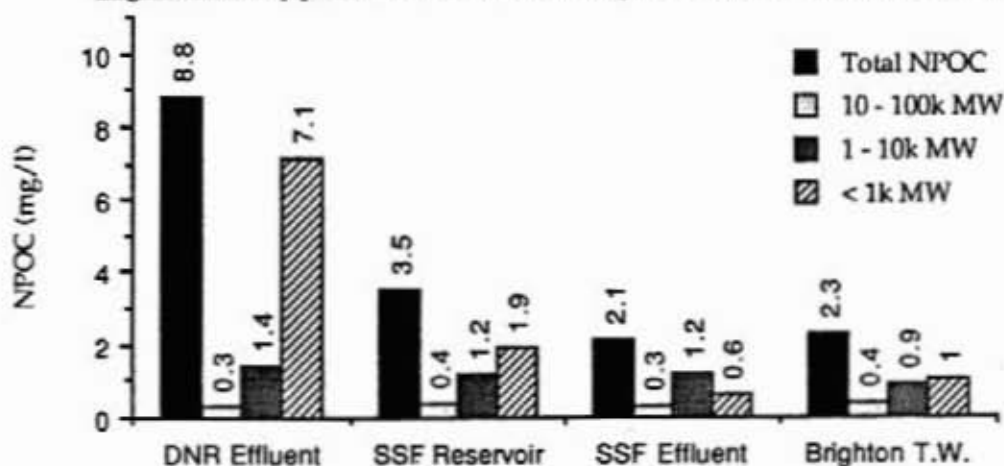

Examining the figure, it appears that the concentration (mg/l) of NPOC with an AMW of 100k - 10k and 10k - 1k remain constant throughout the system, while the concentration (mg/l) of NPOC with an AMW distribution less than 1k undergoes an increase from Brighton tap water to the DNR effluent and a decrease from the DNR effluent to the SSF effluent. It is important to note the similarity between the AMW distribution of Brighton tap water and the AMW distribution of the SSF effluent. It appears that any readily biodegradable organic carbon is completely removed by the system (DNR + RF + SSF), leaving the less biodegradable organic carbon and producing an effluent very similar to the system influent (Brighton tap water).

7. CONCLUSIONS

The purpose of operating a pilot scale denitrification plant in Brighton was to demonstrate the operation of the plant under conditions which are typical of a small community. A more specific goal was to investigate the response of the denitrification reactor to variations in hydraulic loading and periodic air scourings. The performance of the polishing process was also investigated to determine if a potable quality water was produced by the system.

The denitrification reactor performed well under field conditions. It was discovered that the reactor could accommodate changes in hydraulic loading without a decrease in denitrification performance, contradicting other researcher's findings. It is believed that this was due to increased biomass growth in the reactor with a corresponding increase of the combined half-order rate coefficient. This was verified by scoured biomass and reactor pressure measurements. Short term denitrification performance recovery after air scour, which was normally immediate, exhibited a lag period at the beginning of a higher hydraulic loading stage. However, after six weeks the biomass adapted to the new loading conditions and short term recovery once again became immediate.

The roughing filter/slow sand filter polishing system also performed well under field conditions. The polishing system consistently produced water with a turbidity of 0.5 NTU after maturation of the slow sand filter's schmutzdecke. In addition, total coliform bacteria were reduced by over 95% and no *E. coli* were ever found. It was also found that the effluent water exhibited the same TOC "fingerprint" as the normal Brighton water supply, indicating that the polishing process was capable of producing a denitrified water of drinking water quality.

REFERENCES

- Bram, M. J. (1990). Slow Sand Filtration as a Downstream Process for the Denitrification of Potable Waters. M.S. Thesis, University of Colorado, Boulder, CO.
- Cook, N. E., Silverstein, J., Hogrewe, W., and Hammad, K.A. (1990). Denitrification of Potable Water in a Packed Tower Biofilm. Environmental Engineering, 175 - 182.
- Dunning, C., Showers, C., and Spuassabia, A. (1991). A Study of a Denitrification Tower with Two Different Downstream Filtration Configurations. Report Completed for I. Silverstein Pilot Plant Lab, University of Colorado, Boulder, CO.
- Fried, J. J. (1990). Nitrates and Their Control in the EEC Aquatic Environment. Proceedings of the European Institute for Water Seminar on Nitrates - Varese - 1985.
- Forman D. (1989). Are Nitrates a Significant Risk Factor in Human Cancer. Cancer Surveys, 8: 443 - 458.
- Harremoes, P. (1976). The Significance of Pore Diffusion to Filter Denitrification. J. Water Pollution Control Federation, 48, 377 - 388.
- Hogrewe, W. J. (1990). Biofilm Denitrification of Drinking Water: Kinetics, Oxygen Inhibition, and Biomass Removal. Ph. D. Thesis, University of Colorado, Boulder, CO.
- Ketellapper, V. L. (1988). The Kinetics and Stoichiometry of Denitrification Using Acetate as a Carbon Source. M.S. Thesis, University of Colorado, Boulder, CO.
- Mendonca M. (1991). Hydraulic Loading Effects on Biological Denitrification Reactor. M.S. Thesis, University of Colorado, Boulder, CO.
- Painter, H. A. (1977). Microbial Transformations of Inorganic Nitrogen. Prof. Water Technol., 8, 4/5, 3 - 29.
- Payne, W.J. (1973). Reduction of Nitrogenous Oxides by Microorganisms. Bact. Rev., 37, 410 - 452.
- Shuval, H. I., et al. (1980). Infant Methemoglobinemia and Other Health Effects of Nitrates in Drinking Water. Prog. Water Technol., 12, 183 - 193.
- Sydney, R. K. (1991). Pilot Scale Slow Sand Filtration of Biologically Denitrified Potable Water. M.S. Thesis, University of Colorado, Boulder, CO.
- Weisenburger, D. D. (1990). Potential Health Consequences of Groundwater Contamination by Nitrates in Nebraska.

COLORADO WATER RESOURCES RESEARCH INSTITUTE

LIST OF PUBLICATIONS

AVAILABLE FROM:
Bulletin Room
171 Aylesworth Hall
Colorado State University
Fort Collins, CO 80523

PLEASE ENCLOSE PAYMENT & POSTAGE
FOR ORDERS OF \$25.00 OR LESS.

Amount of Order
\$1.00 to \$4.99
\$5.00 to \$9.99
\$10.00 and over

Postage
\$1.00
\$2.00
\$3.00

COMPLETION REPORT SERIES

| <u>Number</u> | | <u>Date</u> | <u>Price</u> |
|---------------|--|-------------|--------------|
| 1. | BACTERIAL RESPONSE TO THE SOIL ENVIRONMENT, by J.W. Boyd, T. Yoshida, L.E. Vereen, R.L. Cada, and S.M. Morrison. | June 1969 | 4.50 |
| 2. | COMPUTER SIMULATION OF WASTE TRANSPORT IN GROUNDWATER AQUIFERS, by D.L. Reddell and D.K. Sunada. | June 1969 | 3.00 |
| 3. | SNOW ACCUMULATION IN RELATION TO FOREST CANOPY, by J. Melman, H. Froehlich and R.E. Dils. | June 1969 | 2.50 |
| 4. | RUNOFF FROM FOREST AND AGRICULTURAL WATERSHEDS, by M.E. Holland. | June 1969 | 4.00 |
| 5. | SOIL MOVEMENT IN AN ALPINE AREA, by W.D. Striffler. | June 1969 | 2.00 |
| 6. | STABILIZATION OF ALLUVIAL CHANNELS, by N.G. Bhowmik and D.B. Simons. | June 1969 | 4.00 |
| 7. | STABILITY OF SLOPES WITH SEEPAGE, by C.D. Muir and D.B. Simons. | June 1969 | 4.00 |
| 8. | IMPROVING EFFICIENCY IN AGRICULTURAL WATER USE, by W.D. Kemper and R.E. Danielson. | June 1969 | 2.00 |
| 9. | CONTROLLED ACCUMULATION OF BLOWING SNOW, by J.L. Rasmussen. | June 1969 | 3.50 |
| 10. | ECONOMICS AND ADMINISTRATION OF WATER RESOURCES, by J. Ernest Flack. | June 1969 | 3.50 |
| 11. | ORGANIZATIONAL ADAPTATION TO CHANGE IN PUBLIC OBJECTIVES FOR WATER MANAGEMENT OF CACHE LA POUDE RIVER SYSTEM, by D. Hill, P.O. Foss and R.L. Meek. | June 1969 | 4.00 |
| 12. | ECONOMICS AND ADMINISTRATION OF WATER RESOURCES, by K.C. Nobe. | June 1969 | 4.00 |
| 13. | ECONOMICS OF GROUNDWATER DEVELOPMENT IN THE HIGH PLAINS OF COLORADO, by D.D. Rohdy. | June 1969 | 2.50 |
| 14. | HYDROGEOLOGY AND WATER QUALITY STUDIES IN THE CACHE LA POUDE BASIN, COLORADO, by James P. Waltz. | June 1969 | 6.00 |
| 15. | HYDRAULIC OPERATING CHARACTERISTICS OF LOW GRADIENT BORDER CHECKS IN THE MANAGEMENT OF IRRIGATION WATER, by D. Heermann and N.A. Evans. | June 1968 | 4.00 |
| 16. | EXPERIMENTAL INVESTIGATION OF SMALL WATERSHED FLOODS, by George L. Smith, V. Yevjevich, and M.E. Holland. | June 1968 | 3.00 |
| 17. | AN EXPLORATION OF COMPONENTS AFFECTING AND LIMITING POLICYMAKING OPTIONS IN LOCAL WATER AGENCIES, by Duane W. Hill, C.L. Garrison and P.O. Foss. | Nov. 1968 | 6.00 |
| 18. | EXPERIMENTAL INVESTIGATION OF SMALL WATERSHED FLOODS, by E.F. Schulz and V.M. Yevjevich. | June 1970 | 6.00 |
| 19. | HYDRAULICS OF LOW GRADIENT BORDER IRRIGATION SYSTEMS, by Norman A. Evans, Dale F. Heermann, Orlando W. Howe and Dennis C. Kincaid. | June 1970 | 4.00 |
| 20. | IMPROVING EFFICIENCY IN AGRICULTURAL WATER USE, by W.D. Kemper. | July 1970 | 4.00 |
| 21. | WATERFOUL-WATER TEMPERATURE RELATIONS IN WINTER, by Ronald A. Ryder. | June 1970 | 6.00 |
| 22. | AN EXPLORATION OF COMPONENTS AFFECTING AND LIMITING POLICYMAKING OPTIONS IN LOCAL WATER AGENCIES, by Duane W. Hill and R.L. Meek. | June 1970 | 4.00 |
| 23. | A SYSTEMATIC TREATMENT OF THE PROBLEM OF INFILTRATION, by H.J. Horel-Seytoux. | June 1971 | 4.00 |
| 24. | STUDIES OF THE ATMOSPHERIC WATER BALANCE, by J.L. Rasmussen. | Aug. 1971 | 6.00 |
| 25. | EVAPORATION OF WATER AS RELATED TO WIND BARRIERS, by S.B. Verma and J.E. Cermak. | June 1971 | 6.00 |
| 26. | WATER TEMPERATURE AS A QUALITY FACTOR IN THE USE OF STREAMS AND RESERVOIRS, by John C. Ward. | Dec. 1971 | 4.00 |

| | | | |
|-----|--|------------|-------|
| 27. | LOCAL WATER AGENCIES, COMMUNICATION PATTERNS, AND THE PLANNING PROCESS, by Duane M. Hill and R.L. Meek. | Sept. 1971 | 6.00 |
| 28. | COMBINED COOLING AND BIO-TREATMENT OF BEET SUGAR FACTORY CONDENSER WATER AFFLUENT, by George O.G. Lof. | June 1971 | 6.00 |
| 29. | IDENTIFICATION OF URBAN WATERSHED UNITS USING REMOTE MULTISPECTRAL SENSING, by R.R. Root and L.D. Miller. | June 1971 | 6.00 |
| 30. | GEOHYDRAULICS AT THE UNCONFORMITY BETWEEN BEDROCK AND ALLUVIAL AQUIPERS, by J.P. Waltz and D.K. Sunada. | June 1972 | 6.00 |
| 31. | SEDIMENTATION AND CONTAINMENT CRITERIA FOR WATERSHED PLANNING AND MANAGEMENT, by Hsieh W. Shen. | June 1972 | 6.00 |
| 32. | BACTERIAL MOVEMENT THROUGH FRACTURED BEDROCK, by S.M. Morrison and Martin J. Allen. | July 1972 | 6.00 |
| 33. | THE MECHANISM OF WASTE TREATMENT AT LOW TEMPERATURE, PART A: MICROBIOLOGY, by S.M. Morrison, Gary C. Newton, George D. Boone and Kirke L. Martin. | Aug. 1972 | 6.00 |
| 34. | THE MECHANISM OF WASTE TREATMENT AT LOW TEMPERATURE, PART B: SANITARY ENGINEERING, by John C. Ward, John S. Hunter and Richard P. Johansen. | Aug. 1972 | 6.00 |
| 35. | AN APPLICATION OF MULTI-VARIATE ANALYSIS IN HYDROLOGY, by V. Yevjevich, M. Dynr-Nielsen, and E.F. Schulz. | Aug. 1972 | 6.00 |
| 36. | URBAN-METROPOLITAN INSTITUTIONS FOR WATER PLANNING DEVELOPMENT AND MANAGEMENT: AN ANALYSIS OF USAGES OF THE TERM "INSTITUTIONS," by N. Wengert. | Sept. 1972 | 6.00 |
| 37. | SEARCHING IN SOCIAL SCIENCE LITERATURE ON WATER: A GUIDE TO SELECTED INFORMATION STORAGE AND RETRIEVAL SYSTEMS - PRELIMINARY VERSION, by Fred Hogge and Norman Wengert. | Sept. 1972 | 6.00 |
| 38. | WATER QUALITY MANAGEMENT DECISIONS IN COLORADO, by Steven R. Nichols, Gaylord V. Skogerboe and Robert C. Ward. | June 1972 | 6.00 |
| 39. | INSTITUTIONS FOR URBAN-METROPOLITAN WATER MANAGEMENT: ESSAYS IN SOCIAL THEORY, by Norman Wengert. | Nov. 1972 | 6.00 |
| 40. | SELECTION OF TEST VARIABLE FOR MINIMAL TIME DETECTION OF BASIN RESPONSE TO NATURAL OF INDUCED CHANGES, by H.J. Morel-Seytoux. | Dec. 1972 | 4.00 |
| 41. | GROUND WATER RECHARGE AS AFFECTED BY SURFACE VEGETATION AND MANAGEMENT, by A. Klute, R.E. Danielson, D.R. Linden and Philip Hamaker. | Dec. 1972 | 6.00 |
| 42. | THEORY AND EXPERIMENTS IN THE PREDICTION OF SMALL WATERSHED RESPONSE, by E.F. Schulz and V. Yevjevich. | Dec. 1972 | 6.00 |
| 43. | EXPERIMENTS IN SMALL WATERSHED RESPONSE, by E.F. Schulz and V. Yevjevich. | Dec. 1972 | 6.00 |
| 44. | ECONOMIC, POLITICAL, AND LEGAL ASPECTS OF COLORADO WATER LAW, by G.E. Radosevich, K.C. Nobe. R.L. Meek and J.E. Flack. | Feb. 1973 | 6.00 |
| 45. | MATHEMATICAL MODELING OF WATER MANAGEMENT STRATEGIES IN URBANIZING RIVER BASINS, by Wynn R. Walker and G.V. Skogerboe (Partial Completion Report). | June 1973 | 8.50 |
| 46. | EVALUATION OF URBAN WATER MANAGEMENT POLICIES IN THE DENVER METROPOLITAN AREA, by W. Walker, R. Ward, and G. Skogerboe (Partial Completion Report). | June 1973 | 8.50 |
| 47. | COORDINATION OF AGRICULTURAL AND URBAN WATER QUALITY MANAGEMENT IN THE UTAH LAKE DRAINAGE AREA, by W.R. Walker, T.L. Huntzinger, and G.V. Skogerboe (Partial Completion Report). | June 1973 | 8.50 |
| 48. | INSTITUTIONAL REQUIREMENTS FOR OPTIMAL WATER QUALITY MANAGEMENT IN ARID URBAN AREAS, by W.R. Walker, G.V. Skogerboe, R.C. Ward and T.L. Huntzinger. | June 1973 | 4.00 |
| 49. | IMPROVEMENTS IN MOVING SPRINKLER IRRIGATION SYSTEMS FOR CONSERVATION OF WATER, by Donald J. Miles. | June 1973 | 8.50 |
| 50. | SYSTEMATIC TREATMENT OF INFILTRATION WITH APPLICATIONS, by H.J. Morel-Seytoux. | June 1973 | 6.00 |
| 51. | AN EXPERIMENTAL STUDY OF SOIL WATER FLOW SYSTEMS INVOLVING HYSTERESIS, by A. Klute and R.W. Gillham. | Aug. 1973 | 8.00 |
| 52. | CONSOLIDATION OF IRRIGATION SYSTEMS: PHASE 1 - ENGINEERING, LEGAL, AND SOCIOLOGICAL CONSTRAINTS AND/OR FACILITATORS, by Gaylord V. Skogerboe, George E. Radosevich, and Evan C. Vlachos. | June 1973 | 25.00 |
| 53. | SYSTEMATIC DESIGN OF LEGAL REGULATIONS FOR OPTIMAL SURFACE - GROUNDWATER USAGE - PHASE 1, by H.J. Morel-Seytoux, R.A. Young and G.E. Radosevich. | Aug. 1973 | 8.00 |
| 54. | GEOLOGICAL FACTORS IN THE EVALUATION OF WATER POLLUTION POTENTIAL AT MOUNTAIN DWELLING SITES, by L.K. Burns, D.R. McCrumb, and S.M. Morrison. | Dec. 1973 | 11.00 |

| | | | |
|-----|---|------------|-------|
| 55. | WATER LAW IN RELATION TO ENVIRONMENTAL QUALITY, by David R. Allardice, George C. Radosevich, Kenneth R. Kobel, and Gustav A. Swanson. | Mar. 1974 | 30.00 |
| 56. | EVALUATION AND IMPLEMENTATION OF URBAN DRAINAGE AND FLOOD CONTROL PROJECTS, by Neil S. Grigg, Leonard R. Rice, Leslie H. Bothan, and W.J. Shoemaker. | June 1974 | 9.00 |
| 57. | SNOW-AIR INTERACTIONS AND MANAGEMENT OF MOUNTAIN WATERSHED SNOWPACK, by James R. Meiman and Lewis O. Grant. | June 1974 | 4.00 |
| 58. | PRIMARY DATA ON ECONOMIC ACTIVITY AND WATER USE IN PROTOTYPE OIL SHALE DEVELOPMENT AREAS OF COLORADO: AN INITIAL INQUIRY, by S. Lee Gray. | June 1974 | 3.00 |
| 59. | A SYSTEM FOR GEOLOGIC EVALUATION OF POLLUTION AT MOUNTAIN DWELLING SITES, by James P. Waltz. | Jan. 1975 | 4.50 |
| 60. | RESEARCH NEEDS AS RELATED TO THE DEVELOPMENT OF SEDIMENT STANDARDS IN RIVERS, by Johannes Gessler. | Mar. 1975 | 4.00 |
| 61. | ECONOMIC AND INSTITUTIONAL ANALYSIS OF COLORADO WATER QUALITY MANAGEMENT, by Robert A. Young, G.E. Radosevich, S.L. Gray, and Kenneth Leathers. | Mar. 1975 | 6.00 |
| 62. | FEASIBILITY AND POTENTIAL AND ENHANCING WATER RECREATION OPPORTUNITIES ON HIGH COUNTRY RESERVOIRS, by Robert Aukerman. | June 1975 | 5.00 |
| 63. | ANALYSIS OF COLORADO PRECIPITATION, by Marie Kuo and Stephen Cox. | June 1975 | 3.00 |
| 64. | COMPUTER ESTIMATES OF NATURAL RECHARGE FROM SOIL MOISTURE DATA- HIGH PLAINS OF COLORADO, by Robert A. Longenbaugh. | July 1975 | 5.00 |
| 65. | URBAN DRAINAGE AND FLOOD CONTROL PROJECTS: ECONOMIC, LEGAL AND FINANCIAL ASPECTS, by Neil S. Grigg, L.S. Tucker, Leonard Rice, and J. Shoemaker. | July 1975 | 11.00 |
| 66. | INDIVIDUAL HOME WASTEWATER CHARACTERIZATION AND TREATMENT, by Edwin R. Bennett and K. Daniel Linstedt. | July 1975 | 9.00 |
| 67. | TOXIC HEAVY METALS IN GROUNDWATER OF A PORTION OF THE FRONT MINERAL BELT, by Kenneth W. Edwards and Ronald W. Klusman. | July 1975 | 4.00 |
| 68. | SYSTEMATIC DESIGN OF LEGAL REGULATIONS FOR OPTIMAL SURFACE-GROUNDWATER USAGE - PHASE 2, by H.J. Morel-Seytoux. | Sept. 1975 | 13.00 |
| 69. | ENGINEERING AND ECOLOGICAL EVALUATION OF ANTITRANSPIRANTS FOR INCREASING RUNOFF IN COLORADO WATERSHEDS, by Frank Kreith. | Sept. 1975 | 3.50 |
| 70. | AN ECONOMIC ANALYSIS OF WATER USE IN COLORADO'S ECONOMY, by S. Lee Gray. | Dec. 1975 | 6.00 |
| 71. | SALT TRANSPORT IN SOIL PROFILES WITH APPLICATION TO IRRIGATION RETURN FLOW - THE DISSOLUTION AND TRANSPORT OF GYPSUM IN SOILS, by T.K. Glas and D.B. McWhorter. | Jan. 1976 | 6.00 |
| 72. | TOXIC HEAVY METALS IN GROUNDWATER OF A PORTION OF THE FRONT RANGE MINERAL BELT, by Ronald W. Klusman and Kenneth W. Edwards. | June 1976 | 5.00 |
| 73. | PRODUCTION OF MUTANT PLANTS CONDUCIVE TO SALT TOLERANCE, by M.W. Nabors. | July 1976 | 5.00 |
| 74. | THE RELEVANCE OF TECHNOLOGICAL CHANGE IN LONG TERM WATER RESOURCES PLANNING, by Roger G. Kraynick and Charles W. Howe. | Oct. 1976 | 4.50 |
| 75. | PHYSICAL AND ECONOMIC EFFECTS ON THE LOCAL AGRICULTURAL ECONOMY OF WATER TRANSFER TO CITIES, by R.L. Anderson, N.I. Wengert, and R.D. Heil. | Oct. 1976 | 4.00 |
| 76. | DETERMINATION OF SNOW DEPTH AND WATER EQUIVALENT BY REMOTE SENSING, by Harold W. Steinhoff and Albert H. Barnes. | June 1976 | 3.00 |
| 77. | EVAPORATION OF WASTEWATER FROM MOUNTAIN CABINS, by John C. Ward. | Mar. 1977 | 9.00 |
| 78. | SELECTING AND PLANNING HIGH COUNTRY RESERVOIRS FOR RECREATION WITHIN A MULTIPURPOSE MANAGEMENT FRAMEWORK, by R. Aukerman, C.A. Carlson, R.L. Hiller and J.W. Labadie. | July 1977 | 7.00 |
| 79. | EVALUATION OF THE STORAGE OF DIFFUSE SOURCES OF SALINITY IN THE UPPER COLORADO RIVER BASIN, by J.B. Laronne and S.A. Schumm. | Sept. 1977 | 5.00 |
| 80. | ACHIEVING URBAN WATER CONSERVATION, A HANDBOOK, by Ernest J. Flack, Wade P. Weakley and Duane W. Hill. | Sept. 1977 | 7.00 |
| 81. | ACHIEVING URBAN WATER CONSERVATION: TESTING COMMUNITY ACCEPTANCE, by Robert W. Snodgrass and Duane W. Hill | Sept. 1977 | 6.00 |
| 82. | DEVELOPMENT OF A SUBSURFACE HYDROLOGIC MODEL AND USE FOR INTEGRATED MANAGEMENT OF SURFACE AND SUBSURFACE WATER RESOURCES, by H.J. Morel-Seytoux. | Dec. 1977 | 4.00 |

83. MODELING THE DYNAMIC RESPONSE OF FLOODPLAINS TO URBANIZATION IN EASTERN NEW ENGLAND, by Donald O. Doehring and Mark E. Smith. Jan. 1978 7.50
84. POLLUTIONAL CHARACTERISTICS OF STORMWATER RUNOFF, by Edwin R. Bennett and K. Daniel Linstedt. Sept. 1978 8.00
85. DEVELOPMENT OF A DRAINAGE AND FLOOD CONTROL MANAGEMENT PROGRAM FOR URBANIZING COMMUNITIES - PART I, by E.J. Riordan, N.S. Gridg and R.L. Hiller. Sept. 1978 3.00
86. DEVELOPMENT OF A DRAINAGE AND FLOOD CONTROL MANAGEMENT PROGRAM FOR URBANIZING COMMUNITIES - PART II, by E.J. Riordan, N.S. Gridg and R.L. Hiller. Sept. 1978 8.00
87. DEVELOPMENT OF A STREAM-AQUIFER MODEL SUITED FOR MANAGEMENT, by H.J. Morel-Seytoux. Aug. 1978 4.00
88. INSTITUTIONAL ARRANGEMENTS FOR EFFECTIVE WATER MANAGEMENT IN COLORADO, by Phillip O. Foss. Nov. 1978 5.00
89. SYNTHESIS AND CALIBRATION OF A RIVER BASIN WATER MANAGEMENT MODEL, by John M. Shafer and John W. Labadie. Oct. 1978 4.00
90. MODELS FOR SYSTEM WATER PLANNING WITH SPECIAL REFERENCE TO WATER REUSE, by D.W. Hendricks and H.J. Morel-Seytoux. June 1978 6.00
91. ECONOMIC BENEFITS FROM INSTREAM FLOW IN A COLORADO MOUNTAIN STREAM, by John T. Daubert, Robert A. Young and S. Lee Gray. June 1979 6.00
92. HYDRAULIC CONDUCTIVITY OF MOUNTAIN SOILS, by Owen R. Williams, Stanley L. Ponce, James R. Meiman and Mark Spearnek. Sept. 1978 4.00
93. APPLICATION OF GEOMORPHIC PRINCIPLES TO ENVIRONMENTAL MANAGEMENT IN SEMI-ARID REGIONS, by S.A. Schumm, M.T. Bradley and Z.B. Begdin. Feb. 1980 4.00
94. WATER RESOURCES FOR URBAN LAWNS, by W.R. Kneebone, I.L. Pepper, R.E. Danielson, W.E. Hart, L.O. Pochopp and J. Borelli (Regional Project - CMIC). Sept. 1979 5.00
95. SALINITY MANAGEMENT OPTIONS FOR THE COLORADO RIVER, by Jay C. Anderson and Alan P. Kleinman (Regional Project - B-107-Utah). June 1978 6.00
96. CONSOLIDATION OF IRRIGATION SYSTEMS: PHASE II, ENGINEERING, ECONOMIC, LEGAL, AND SOCIOLOGICAL REQUIREMENTS, by E.C. Vlachos, P.C. Huszar, G.E. Radosevich and G.V. Skogerboe. May 1980 9.00
95. DROUGHT-INDUCED PROBLEMS AND RESPONSES OF SMALL TOWNS AND RURAL WATER ENTITIES IN COLORADO: THE 1976-1978 DROUGHT, by Charles W. Howe. June 1980 5.00
96. THE PRODUCTION OF AGRICULTURALLY USEFUL MUTANT PLANTS WITH CHARACTERISTICS CONDUCTIVE TO SALT TOLERANCE AND EFFICIENT WATER UTILIZATION, by MURRAY W. Nabors. Oct. 1979 4.00
97. WATER REQUIREMENTS FOR URBAN LAWNS IN COLORADO, by Robert E. Danielson, William E. Hart, Charles M. Felshake and Peter M. Haw. Aug. 1980 4.00
98. THE EFFECT OF ALGAL INHIBITORS ON HIGHER PLANT TISSUES, by Paul Kugrens. July 1980 3.50
99. APPLICATIONS OF REMOTE SENSING IN HYDROLOGY, by William D. Stifflier and Diana C. Fitz. Sept. 1980 4.00
100. A WATERSHED INFORMATION SYSTEM, by Anton G. Thomsen and William D. Stifflier. Sept. 1980 5.00
101. AN EMPIRICAL APPLICATION OF A MODEL FOR ESTIMATING THE RECREATION VALUE OF INSTREAM FLOW, by R.G. Walsh, R.K. Ericson, D.J. Arosteguy, and M.P. Hansen. Oct. 1980 4.00
102. MEASURING BENEFITS AND THE ECONOMIC VALUE OF WATER IN RECREATION ON HIGH COUNTRY RESERVOIRS, by R.G. Walsh, R. Aukerman, and R. Milton. Sept. 1980 4.00
103. EMPIRICAL APPLICATION OF A MODEL FOR ESTIMATING THE RECREATION VALUE OF WATER IN RESERVOIRS COMPARED TO INSTREAM FLOW, by Richard G. Walsh. Dec. 1980 4.00
104. DETECTION OF WATER QUALITY CHANGES THROUGH OPTIMAL TESTS AND RELIABILITY TESTS, by Roy W. Koch, Thomas G. Sanders, and H.J. Morel-Seytoux. Sept. 1980 5.00
105. MUNICIPAL WATER USE IN NORTHERN COLORADO: DEVELOPMENT OF EFFICIENCY-OF-USE CRITERION, by A.U. White, A.N. Dinatale, J. Greenbert, and J.B. Flack. Sept. 1980 5.00
106. URBAN LAWN IRRIGATION AND MANAGEMENT PRACTICES FOR WATER SAVING WITH MINIMUM EFFECT ON LAWN QUALITY, by R.E. Danielson and C.M. Felshake. May 1981 7.00
107. ROLE OF SEDIMENT IN NON-POINT SOURCE SALT LOADING WITHIN THE UPPER COLORADO RIVER BASIN, by H.W. Shen, J.B. Laronne, E.D. Enck, G. Sunday, K.K. Tanji, L.D. Whittig, and J.W. Biggar. Aug. 1981 9.00
108. WATERLOGGING CONTROL FOR IMPROVED WATER AND LAND USE EFFICIENCIES: A SYSTEMATIC ANALYSIS, by A. Simpson, H.J. Morel-Seytoux, R.A. Young, G.E. Radosevich, and W.T. Franklin. Dec. 1981 6.00

| | | | |
|------|--|------------|-------|
| 109. | SALT- AND DROUGHT-TOLERANT CROP PLANTS FOR WATER CONSERVATION, by Murray W. Nabors. | Oct. 1981 | 6.00 |
| 110. | GEOMORPHIC AND LITHOLOGIC CONTROLS OF DIFFUSE-SOURCE SALINITY, GRAND VALLEY, WESTERN COLORADO, by R.K. Johnson and S.A. Schumm. | Apr. 1982 | 6.00 |
| 111. | INVESTIGATION OF OBJECTIVE FUNCTIONS AND OPERATION RULES FOR STORAGE RESERVOIRS, by V. Yevjevich, W.A. Hall and J.D. Salas. | Sept. 1981 | 4.00 |
| 112. | DAILY OPERATIONAL TOOL FOR MAXIMUM BENEFICIAL USE MANAGEMENT OF SURFACE AND GROUNDWATERS IN A BASIN, by H.J. Morel-Seytoux, Kristine L. Verdin and T.H. Illangasekare. | Mar. 1982 | 4.00 |
| 113. | A WATER HANDBOOK FOR METAL MINING OPERATIONS, by Thomas R. Wildeman. | Nov. 1981 | 6.00 |
| 114. | PLANNING WATER REUSE: DEVELOPMENT OF REUSE THEORY AND THE INPUT-OUTPUT MODEL, VOL. I: FUNDAMENTALS, by D. Klooz and D.W. Hendricks. | Sept. 1980 | 13.00 |
| 115. | PLANNING WATER REUSE: DEVELOPMENT OF REUSE THEORY AND THE INPUT-OUTPUT MODEL, VOL. II: APPLICATION, by D. Klooz and D.W. Hendricks. | Sept. 1980 | 6.00 |
| 116. | EFFECTS OF RELEASES OF SEDIMENT FROM RESERVOIRS ON STREAM BIOTA, by James V. Ward. | Sept. 1982 | 4.00 |
| 117. | DYNAMIC WATER ROUTING USING A PREDICTOR-CORRECTOR METHOD WITH SEDIMENT ROUTING, by D.B. Simons, R. M. Li, J. Garbrecht and R. K. Simons. | Sept. 1982 | 6.00 |
| 118. | ECONOMIC ASPECTS OF COST-SHARING ARRANGEMENTS FOR FEDERAL IRRIGATION PROJECTS: A CASE STUDY, by G. Keleta, R.A. Young and E. Sparling. | Dec. 1982 | 4.00 |
| 119. | ECONOMIC ISSUES IN RESOLVING CONFLICTS IN WATER USE, by S. Lee Gray and Robert A. Young. | Feb. 1983 | 4.00 |
| 120. | THE EFFECTS OF WATER CONSERVATION ON NEW WATER SUPPLY FOR URBAN COLORADO UTILITIES, by Carol Ellinghouse and George McCoy. | Dec. 1982 | 9.00 |
| 121. | SOLAR HEATING OF WASTEWATER STABILIZATION PONDS, by Stanley L. Klemetson. | Mar. 1983 | 5.00 |
| 122. | ECONOMIC IMPACTS OF TRANSFERRING WATER FROM AGRICULTURE TO ALTERNATIVE USES IN COLORADO, by Robert A. Young. | Apr. 1983 | 6.00 |
| 123. | ARTIFICIAL GROUNDWATER RECHARGE, SAN LUIS VALLEY, COLORADO, by Dan Sunada. | May 1983 | 7.00 |
| 124. | EFFECTS OF WILDERNESS LEGISLATION ON WATER PROJECT DEVELOPMENT IN COLORADO, by Glen D. Weaver. | May 1983 | 8.00 |
| 125. | A RIVER BASIN NETWORK MODEL FOR CONJUNCTIVE USE OF SURFACE AND GROUND-WATER: PROGRAM CONSIM, by J.W. Labadie, S. Phamwon and R.C. Lazaro. | May 1983 | 8.00 |
| 126. | INCREASING THE ECONOMIC EFFICIENCY AND AFFORDABILITY OF STORM DRAINAGE PROJECTS, by Harold C. Cochran and Paul C. Huszar. | Sept. 1983 | 4.00 |
| 127. | MATHEMATICAL MODELS FOR PREDICTION OF SOIL MOISTURE PROFILES, by H.J. Morel-Seytoux. | July 1983 | 4.00 |
| 128. | DISSOLVED SOLIDS HAZARDS IN THE SOUTH PLATTE BASIN, VOL. I: SALT TRANSPORT IN THE RIVER, by Ramon V. Gomez-Ferrer and David W. Hendricks. | Dec. 1983 | 7.00 |
| 129. | DISSOLVED SOLIDS HAZARDS IN THE SOUTH PLATTE RIVER BASIN, VOL. II: SALT BALANCE ANALYSIS, by C.D. Turner and D.W. Hendricks. | Dec. 1983 | 7.00 |
| 130. | CONJUNCTIVE OPERATION OF A SURFACE RESERVOIR AND THE GROUNDWATER STORAGE THROUGH A HYDRAULICALLY CONNECTED STREAM, by H.J. Morel-Seytoux. | Feb. 1984 | 3.00 |
| 131. | THE EFFECT OF LITHOLOGY AND CLIMATE ON THE MORPHOLOGY OF DRAINAGE BASINS IN NORTHWESTERN COLORADO, by Sandra L. Ecker. | June 1984 | 7.00 |
| 132. | SPECIFIC YIELD BY GEOPHYSICAL LOGGING POTENTIAL FOR THE DENVER BASIN, by David B. McWhorter. | July 1984 | 4.00 |
| 133. | VOLUNTARY BASINWIDE WATER MANAGEMENT: SOUTH PLATTE RIVER BASIN, COLORADO, by N.S. Grigg, H.P. Caulfield, Jr., N.A. Evans, J.E. Flack, D.W. Hendricks, J.W. Labadie, D.B. McWhorter, H.J. Morel-Seytoux, W.L. Raley and R.A. Young. | Oct. 1984 | 5.00 |
| 134. | EFFECTS OF ALTERNATIVE ELECTRICITY RATES AND RATE STRUCTURES ON ELECTRICITY AND WATER USE ON THE COLORADO HIGH PLAINS, by R.L. Gardner, R.A. Young and Lawrence Conklin. | Oct. 1984 | 4.00 |
| 135. | COST-EFFECTIVE DESIGN AND OPERATION OF URBAN STORMWATER CONTROL SYSTEMS: DECISION-SUPPORT SOFTWARE, by John W. Labadie, Neil S. Grigg, Dennis M. Morrow, and David K. Robinson. | Oct. 1984 | 7.00 |

| | | | |
|------|--|------------|-------|
| 136. | VARIABILITY OF UNUTILIZED SURFACE WATER SUPPLIES FROM THE YAMPA AND WHITE RIVER BASINS, by H.S. When, R. Anderson, H.P. Caulfield, Jr., and S.K. Yan. | Jan. 1985 | 7.00 |
| 137. | THE ENDANGERED SPECIES ACT AND WATER DEVELOPMENT WITHIN THE SOUTH PLATTE BASIN, by Lawrence J. MacDonnell. | Aug. 1985 | 6.00 |
| 138. | THE POTENTIAL OF MODIFIED FLOW-RELEASE RULES FOR KINGSLEY DAM IN MEETING CRANE HABITAT REQUIREMENTS--PLATTE RIVER, NEBRASKA, by Hsieh Wen Shen, Kim Loi Hiew and Eric Loubser. | Nov. 1985 | 7.00 |
| 139. | GUIDELINES FOR DEVELOPING AREA-ORIGIN COMPENSATION, by L.J. MacDonnell, Charles W. Howe, James N. Corbridge, Jr. and W. Ashley Ahrens. | Dec. 1985 | 5.00 |
| 140. | MONITORING STRATEGIES FOR GROUNDWATER QUALITY MANAGEMENT, by J.C. Loftis, R.H. Montgomery, J. Harris, D. Nettles, P.S. Porter, R.C. Ward and T.G. Sanders. | Apr. 1986 | 5.00 |
| 141. | POTENTIAL GROUNDWATER IMPACTS FROM CHEMIGATION, by James W. Warner and Kit Nielsen. | Sept. 1986 | 5.00 |
| 145. | IMPACTS OF WASTEWATER DISCHARGE TO FOUNTAIN CREEK ON NITRATE CONTAMINATION IN THE WIDEFIELD AQUIFER, by Kimball Stark Loomis and James W. Warner. | Feb. 1990 | TBA |
| 146. | GEOCHEMICAL ASSESSMENT OF AQUIFER RECHARGE EFFECTS IN THE SOUTHWEST DENVER BASIN, by Andrea R. Aikin and A. Keith Turner. | Aug. 1987 | 4.00 |
| 147. | EVALUATION OF DESIGN FLOW CRITERIA FOR EFFLUENT DISCHARGE PERMITS IN COLORADO, by Cynthia L. Paulson and Thomas G. Sanders. | Aug. 1987 | 15.00 |
| 148. | INTEGRATING TRIBUTARY GROUNDWATER DEVELOPMENT INTO THE PRIOR APPROPRIATION SYSTEM: THE SOUTH PLATTE EXPERIENCE, by Lawrence J. MacDonnell. | Aug. 1988 | 4.00 |
| 149. | THE ECONOMIC ROLE OF WATER IN COLORADO: AN INPUT-OUTPUT ANALYSIS, by S. Lee Gray, John R. McKean and Thomas A. Miller. | Sept. 1988 | 6.00 |
| 150. | GROUNDWATER FAUNAS AS INDICATORS OF GROUNDWATER QUALITY: THE SOUTH PLATTE RIVER SYSTEM, by J.V. Ward, Neal J. Voelz, and James H. Harvey. | Feb. 1989 | 4.00 |
| 151. | WATER QUALITY AND WATER RIGHTS IN COLORADO, by Lawrence J. MacDonnell. | July 1989 | 4.00 |
| 152. | ENHANCED MICROBIAL RECLAMATION OF WATER POLLUTED WITH TOXIC ORGANIC CHEMICALS, by Steven K. Schmidt. | Sept. 1989 | 5.00 |
| 153. | BIOLOGICAL DENITRIFICATION OF POLLUTED GROUNDWATER, by Nevis E. Cook, Jr. and Johann Silverstein. | Nov. 1989 | 5.00 |
| 154. | ACID MINE DRAINAGE; STREAMBED SORPTION OF COPPER, CADMIUM AND ZINC, by Donald L. Macalady, Kathleen S. Smith and James F. Ranville. | Jan. 1990 | 5.00 |
| 155. | RIVINT - AN IMPROVED CODE FOR SIMULATING SURFACE/GROUNDWATER INTERACTIONS WITH FLOW, by Judith Schenk and Eileen Poeter. | Mar. 1990 | 25.00 |
| 156. | POTENTIAL PESTICIDE TRANSPORT IN COLORADO AGRICULTURE: A MODEL COMPARISON, by Walter L. Niccoli, Jim C. Loftis and Deanna S. Durnford. | Mar. 1990 | 5.00 |
| 157. | SCREENING METHODS FOR GROUNDWATER POLLUTION POTENTIAL FROM PESTICIDE USE IN COLORADO AGRICULTURE, by Deanna S. Durnford, Kirk R. Thompson, David A. Ellerbroek, Jim C. Loftis, G. Scott Davies, and Kenneth W. Knutson. | Dec. 1990 | 6.00 |
| 158. | URBAN WATER SUPPLY RELIABILITY: PREFERENCES OF MANAGERS, ELECTED OFFICIALS AND WATER USERS IN BOULDER, COLORADO, by Charles W. Howe, Lynne Bennett, Charles M. Brendecke, J. Ernest Flack, Robert M. Hamm, Roger Mann, Lee Rozaklis, Mark Griffin Smith, and Karl Wunderlich. | Dec. 1990 | 4.00 |
| 159. | ADSORPTION OF COPPER, CADMIUM, AND ZINC ON SUSPENDED SEDIMENTS IN A STREAM CONTAMINATED BY ACID MINE DRAINAGE: THE EFFECT OF SEASONAL CHANGES IN DISSOLVED ORGANIC CARBON, by Donald L. Macalady James F. Ranville, Kathleen S. Smith, and Stephen R. Daniel. | Jan. 1991 | 5.00 |
| 160. | A MODELING APPROACH FOR ASSESSING THE FEASIBILITY OF GROUNDWATER WITHDRAWAL FROM THE DENVER BASIN DURING PERIODS OF DROUGHT, by Sigurd Jaunarajs and Eileen Poeter. | Apr. 1991 | 16.00 |
| 161. | ECONOMIC IMPACTS OF ALTERNATIVE WATER ALLOCATION INSTITUTIONS IN THE COLORADO RIVER BASIN, by James F. Booker and Robert A. Young. | Aug. 1991 | TBA |
| 162. | FIELD DEMONSTRATION OF BIOLOGICAL DENITRIFICATION OF POLLUTED GROUNDWATER AND PILOT SCALE FIELD TESTING OF BIOLOGICAL DENITRIFICATION WITH WIDELY VARIED HYDRAULIC LOADING RATES, by Nevis E. Cook, Jr., Joann Silverstein, Bill Veydovec, Maria Marcia de Mendonca, and Roger Sydney. | Dec. 1991 | TBA |
| 163. | FATE AND EFFECTS OF HEAVY METALS ON THE ARKANSAS RIVER, by William H. Clements. | Dec. 1991 | TBA |

| | | | |
|-----|---|-----------|-------|
| 31. | THE DENVER BASIN: ITS BEDROCK AQUIFERS, by M.W. Bittinger. | Jan. 1979 | Free |
| 32. | SNOWPACK AUGMENTATION BY CLOUD SEEDING IN COLORADO AND UTAH, by Roderick A. Chisholm II and Ronald L. Grimes. | Aug. 1979 | 5.00 |
| 33. | THE IMPACTS OF IMPROVING EFFICIENCY IN IRRIGATION SYSTEMS ON WATER AVAILABILITY IN THE LOWER SOUTH PLATTE RIVER BASIN, by H.J. Morel-Seytoux, T. Illangasekare, M.W. Bittinger and Norman A. Evans. | Jan. 1979 | Free |
| 34. | SAN LUIS VALLEY WATER PROBLEMS: A LEGAL PERSPECTIVE, by G.E. Radosevich and R.W. Rutz. | Jan. 1979 | 5.00 |
| 35. | FEDERAL WATER STORAGE PROJECTS: PLUSES AND MINUSES, by C.W. Howe. | June 1979 | Free |
| 36. | CUTTING CITY WATER DEMAND, by J. Ernest Flack. | May 1979 | Free |
| 37. | WATER FOR THE SOUTH PLATTE BASIN, by D.W. Hendricks, H.J. Morel-Seytoux and C. Turner. | Mar. 1979 | Free |
| 38. | PUBLIC PARTICIPATION PRACTICES OF THE U.S. ARMY CORPS OF ENGINEERS, by Charles E. Christ and Ronald Lanier. | July 1979 | 4.00 |
| 39. | ADMINISTRATION OF THE SMALL WATERSHED PROGRAM, 1955-1978, - AN ANALYSIS, by Wildon J. Fontenot. | Aug. 1979 | 4.00 |
| 40. | PROCEEDINGS OF THE WORKSHOP ON INSTREAM FLOW HABITAT CRITERIA AND MODELING, edited by George L. Smith. | Dec. 1979 | 6.00 |
| 41. | EXPLORING WAYS OF INCREASING THE USE OF SOUTH PLATTE WATER, by John Labadie and John Shafer. | 1980 | Free |
| 42. | PROCEEDINGS: HIGH-ALTITUDE REVEGETATION WORKSHOP NO. 4, edited by Charles L. Jackson, and Mark A. Schuster (Climax Molybdenum Company). | June 1980 | 6.00 |
| 43. | AN EVALUATION OF THE CACHE LA POUDDRE WILD AND SCENIC RIVER DRAFT ENVIRONMENTAL IMPACT STATEMENT AND STUDY REPORT, by Michael J. Eubanks. | Aug. 1980 | 6.00 |
| 44. | THE NATIONAL FLOOD INSURANCE PROGRAM IN THE LARIMER COUNTY, COLORADO AREA, by Harry Shoudy. | Aug. 1980 | 4.00 |
| 45. | PROCEEDINGS: FOURTH WORKSHOP ON HOME SEWAGE DISPOSAL IN COLORADO - STATE/COUNTY COOPERATION IN MANAGING SMALL WASTEWATER FLOWS, by Robert C. Ward. | Aug. 1981 | 5.00 |
| 46. | THE DECLINING ROLE OF THE U.S. ARMY CORPS OF ENGINEERS IN THE DEVELOPMENT OF THE NATION'S WATER RESOURCES, by Charles Yoe. | Aug. 1981 | 8.00 |
| 47. | SECTION 404 OF THE CLEAN WATER ACT - AN EVALUATION OF THE ISSUES AND PERMIT PROGRAM IMPLEMENTATION IN WESTERN COLORADO, by Dennis W. Barnett. | Aug. 1982 | 6.00 |
| 48. | PROCEEDINGS, HIGH-ALTITUDE REVEGETATION WORKSHOP NO. 5, edited by Robin L. Cuany and Julie Etra. | Dec. 1982 | 6.00 |
| 49. | PROCEEDINGS: FIFTH WORKSHOP ON HOME SEWAGE DISPOSAL IN COLORADO: OPERATION AND MAINTENANCE OF ON-SITE WASTEWATER TREATMENT SYSTEMS, by Robert C. Ward. | June 1983 | 5.00 |
| 50. | POSSIBLE CAPTURE OF THE MISSISSIPPI BY THE ATCHAFALAYA RIVER, by John D. Higby, Jr. | Aug. 1983 | 5.00 |
| 51. | ENVIRONMENTAL REGULATION: APPLICANT BEHAVIOR AS A FACTOR IN OBTAINING PERMITS, by Barney M. Opton. | July 1984 | 8.00 |
| 52. | A CRITICAL ASSESSMENT OF METHODOLOGIES FOR ESTIMATING URBAN FLOOD DAMAGES-PREVENTED BENEFITS, by David Plazak. | July 1984 | 3.00 |
| 53. | PROCEEDINGS: HIGH-ALTITUDE REVEGETATION WORKSHOP NO. 6, edited by Thomas A. Colbert and Robin L. Cuany. | Dec. 1984 | 8.00 |
| 54. | ARTIFICIAL AQUIFER RECHARGE IN THE COLORADO PORTION OF THE OGALLALA AQUIFER, by R. Longenbaugh, D. Miles, E. Hess and J. Rubingh. | Nov. 1984 | 2.00 |
| 55. | WORKSHOP ON WATER QUALITY MONITORING IN COLORADO, edited by Robert C. Ward and William L. Raley. | July 1985 | 5.00 |
| 56. | GROUNDWATER QUALITY PROTECTION POLICIES FOR THE ROCKY MOUNTAIN REGION AND THE NATION, Transcript of Proceedings. | Apr. 1986 | 6.00 |
| 57. | PROCEEDINGS: SIXTH WORKSHOP ON ON-SITE WASTEWATER TREATMENT IN COLORADO, edited by Robert C. Ward. | May 1986 | 5.00 |
| 58. | PROCEEDINGS: HIGH ALTITUDE REVEGETATION WORKSHOP NO. 7, edited by Mark A. Schuster and Ronald H. Zuck. | Oct. 1986 | 10.00 |
| 59. | PROCEEDINGS: HIGH ALTITUDE REVEGETATION WORKSHOP NO. 8, edited by Warren R. Keanmerer and Larry F. Brown. | July 1988 | 12.00 |

| | | | |
|-----|--|-----------|-------|
| 60. | PROCEEDINGS: SEVENTH WORKSHOP ON ON-SITE WASTEWATER TREATMENT IN COLORADO, edited by Robert C. Ward. | June 1989 | 3.00 |
| 61. | PROCEEDINGS: INTERNATIONAL SYMPOSIUM ON THE DESIGN OF WATER QUALITY INFORMATION SYSTEMS, edited by Robert C. Ward, Jim C. Loftis, and Graham B. McBride. | June 1989 | 25.00 |
| 62. | HYDROLOGIC ASPECTS OF DAM SAFTY, Edited by Neil S. Grigg. | Feb. 1990 | 8.00 |
| 63. | PROCEEDINGS: HIGH ALTITUDE REVEGETATION WORKSHOP NO. 9, Edited by Warren R. Keammerer and Jeffrey Todd. | July 1990 | 12.00 |
| 64. | PROCEEDINGS: COLORADO WATER WORKSHOP, JULY 22-24, 1990, "COLORADO WATER INSTITUTIONS, VALUABLE TRADITIONS - NEW FRONTIERS. | Nov. 1990 | 30.00 |
| 65. | PROCEEDINGS: WATER PROJECT DEVELOPMENT AND FINANCING IN THE 1990S, Edited by Kate A. Berry. | Feb. 1991 | 5.00 |
| 66. | SOUTH PLATTE RIVER RESOURCE MANAGEMENT; FINDING A BALANCE, by R. Craig Woodring, Editor. | June 1991 | 5.00 |
| 67. | COLORADO CITIZENS WATER HANDBOOK - Colorado, The Next 100 Years - by George Vranesh. | Nov. 1991 | 7.00 |

TECHNICAL REPORT SERIES

| | | | |
|-----|--|------------|-------|
| 1. | SURFACE REHABILITATION OF LAND DISTURBANCES RESULTING FROM OIL SHALE DEVELOPMENT, by C. Wayne Cook. | June 1974 | 11.00 |
| 2. | ESTIMATED AVERAGE ANNUAL WATER BALANCE FOR PICEANCE AND YELLOW CREEK WATERSHEDS, by Ivan F. Wymore. | Aug. 1974 | Free |
| 3. | IMPLEMENTATION OF THE FEDERAL WATER PROJECT RECREATION ACT IN COLORADO, by John A. Spence. | June 1974 | Free |
| 4. | VEGETATION STABILIZATION OF SPENT OIL SHALES, by H.P. Harbert and W.A. Berg. | Dec. 1974 | 4.00 |
| 5. | REVEGETATION OF DISTURBED SOILS IN VARIOUS VEGETATION ECOSYSTEMS OF THE PICEANCE BASIN, by P.L. Sims and E.F. Redente. | Dec. 1974 | 5.25 |
| 6. | COLORADO ENVIRONMENTAL DATA SYSTEMS (abridged), by Ross A. Whaley and A.A. Dyer. | Oct. 1972 | 6.00 |
| 7. | MANUAL FOR TRAINING IN THE APPLICATION OF PRINCIPLES AND STANDARDS (Water Resources Council), by Henry Caulfield, Jr. | Dec. 1974 | 11.00 |
| 8. | MODELS DESIGNED TO EFFICIENTLY ALLOCATE IRRIGATION WATER USE BASED ON CROP RESPONSE TO SOIL MOISTURE STRESS, by R.L. Anderson, D. Yaron and R. Young. | May 1977 | 5.00 |
| 9. | THE 1972 FEDERAL WATER POLLUTION CONTROL ACT'S AREA-WIDE PLANNING PROVISION: HAS EXECUTIVE IMPLEMENTATION MET CONGRESSIONAL INTENT? by D.F. Stark. | Nov. 1977 | 6.00 |
| 10. | EFFICIENCY OF WASTEWATER DISPOSAL IN MOUNTAIN AREAS, by Richard G. Walsh, Jared P. Soper and Anthony A. Prato. | Jan. 1978 | 6.00 |
| 11. | FEDERAL WATER RECREATION IN COLORADO: COMPREHENSIVE VIEW AND ANALYSIS, by Kharol E. Stefanec. | May 1978 | 6.00 |
| 12. | RECREATION BENEFITS OF WATER QUALITY: ROCKY MOUNTAIN NATIONAL PARK, SOUTH PLATTE RIVER BASIN, COLORADO, by R.G. Walsh, R.K. Ericson, J.R. McKean and R.A. Young. | May 1978 | 5.00 |
| 13. | IMPACT OF IRRIGATION EFFICIENCY IMPROVEMENTS ON WATER AVAILABILITY IN THE SOUTH PLATTE RIVER BASIN, by M.W. Bittinger, R.E. Danielson, N.A. Evans, W.E. Hart, H.J. Morel-Seytoux and M.M. Skinner. | Jan. 1979 | 6.00 |
| 14. | ECONOMIC VALUE OF BENEFITS FROM RECREATION AT HIGH MOUNTAIN RESERVOIRS, by Richard G. Walsh, Robert Aukerman and Dean Rudd. | Dec. 1978 | 4.00 |
| 15. | WEEKLY CROP CONSUMPTIVE USE AND PRECIPITATION IN THE LOWER SOUTH PLATTE RIVER BASIN (Fort Morgan, Sterling and Julesburg) 1947-1975. | Feb. 1979 | Free |
| 16. | WATER MANAGEMENT MODEL FOR FRONT RANGE RIVER BASINS, by John W. Labadie and John M. Shafer. | Apr. 1979 | 6.00 |
| 17. | LAND TREATMENT OF MUNICIPAL SEWAGE EFFLUENT AT HAYDEN, COLORADO, by K.A. Barbarick, B.R. Sabey, and N.A. Evans. | Oct. 1977 | 4.00 |
| 18. | AN INTERACTIVE RIVER BASIN WATER MANAGEMENT MODEL: SYNTHESIS AND APPLICATION, by John M. Shafer. | Aug. 1979 | 5.00 |
| 19. | AN ECONOMIC EVALUATION OF THE GENERAL MANAGEMENT FOR YOSEMITE NATIONAL PARK, by Richard G. Walsh. | Mar. 1980 | 5.00 |
| 20. | DEVELOPMENT OF METHODOLOGIES FOR DETERMINING OPTIMAL WATER STORAGE STRATEGIES, by Darrell G. Fontane and John W. Labadie. | Sept. 1980 | 3.00 |

| | | | |
|-----|--|-----------|------|
| 21. | THE ECONOMY OF ALBANY, CARBON, AND SWEETWATER COUNTIES, WYOMING - DESCRIPTION AND ANALYSIS, by John R. McKean and Joseph C. Weber. | Jan. 1981 | 4.00 |
| 22. | AN INPUT-OUTPUT STUDY OF THE UPPER COLORADO MAIN STEM REGION OF WESTERN COLORADO, by John R. McKean and Joseph C. Weber. | Jan. 1981 | 5.00 |
| 23. | THE ECONOMY OF MOFFAT, ROUTT AND RIO BLANCO COUNTIES, COLORADO - DESCRIPTION AND ANALYSIS, by John R. McKean and Joseph C. Weber. | Jan. 1981 | 5.00 |
| 24. | THE SURVEY-BASED INPUT-OUTPUT MODEL AS A RESOURCE PLANNING TOOL, by John R. McKean. | Jan. 1981 | 4.00 |
| 25. | THE ECONOMY OF NORTHWESTERN COLORADO - DESCRIPTION AND ANALYSIS, by S.L. Gray, J.R. McKean and J.C. Weber. | Jan. 1981 | 5.00 |
| 26. | AN INPUT-OUTPUT ANALYSIS OF SPORTSMAN EXPENDITURES IN COLORADO, by John R. McKean. | Jan. 1981 | 5.00 |
| 27. | AN INPUT-OUTPUT STUDY OF THE KREMMLING REGION OF WESTERN COLORADO, by John R. McKean and Joseph Weber. | Mar. 1981 | 4.00 |
| 28. | AN ASSESSMENT OF WATER USE AND POLICIES IN NORTHERN COLORADO CITIES, by Kelly N. DiNatale. | Mar. 1981 | 6.00 |
| 29. | AN ECONOMIC INPUT-OUTPUT STUDY OF THE HIGH PLAINS REGION OF EASTERN COLORADO, by J.R. McKean, R.K. Ericson and J.C. Weber. | Feb. 1982 | 8.00 |
| 30. | ENERGY PRODUCTION AND USE IN COLORADO'S HIGH PLAINS REGION, by Emm McBroom. | Feb. 1982 | 8.00 |
| 31. | COMMUNITY AND SOCIO-ECONOMIC ANALYSIS OF COLORADO'S HIGH PLAINS REGION, by Robert Burns. | Feb. 1982 | 8.00 |
| 32. | HYDROLOGIC AND PUMPING DATA FOR COLORADO'S OGALLALA AQUIFER REGION, 1979, by Robert Longenbaugh. | Feb. 1982 | 8.00 |
| 33. | PROJECTED POPULATION, EMPLOYMENT, AND ECONOMIC OUTPUT IN COLORADO'S EASTERN HIGH PLAINS, 1979-2020, by John R. McKean. | Feb. 1982 | 8.00 |
| 34. | ENERGY AND WATER SCARCITY AND THE IRRIGATED AGRICULTURAL ECONOMY OF THE COLORADO HIGH PLAINS: DIRECT ECONOMIC-HYDROLOGIC IMPACT FORECASTS (1979-2020), by R.A. Young, L.R. Conklin, R.A. Longenbaugh and R.L. Gardner. | Feb. 1982 | 8.00 |
| 35. | THE ECONOMIES OF MESA COUNTY AND GARFIELD, MOFFAT, RIO BLANCO AND ROUTT COUNTIES, COLORADO, by J.R. McKean, J.C. Weber and R.K. Ericson. | Apr. 1981 | 5.00 |
| 36. | THE ECONOMY OF THE POWDER RIVER BASIN REGION OF EASTERN WYOMING: DESCRIPTION AND ANALYSIS, by J.R. McKean, J.C. Weber and R.K. Ericson. | Jan. 1981 | 4.00 |
| 37. | AN INTERINDUSTRY ANALYSIS OF THREE FRONT RANGE FOOTHILLS COMMUNITIES: ESTES PARK, GILPIN COUNTY AND WOODLAND PARK, COLORADO, by John R. McKean, Warren Trock and David R. Senf. | July 1982 | 6.00 |
| 38. | GROUNDWATER QUALITY REGULATION IN COLORADO, by Thomas J. Looft. | Dec. 1982 | 6.00 |
| 39. | SPORTSMEN EXPENDITURES FOR HUNTING AND FISHING IN COLORADO - 1981, by John R. McKean and Kenneth C. Nobe. | Jan. 1983 | 5.00 |
| 40. | THE ECONOMY OF LINCOLN, SUBLETTE, SWEETWATER AND UINTA COUNTIES, WYOMING, ROCK SPRINGS BLM DISTRICT, by J.R. McKean and J.C. Weber. | May 1983 | 5.00 |
| 41. | THE ECONOMY OF ALBANY, CARBON AND FREMONT COUNTIES, WYOMING, RAWLINS BLM DISTRICT, by John R. McKean and Joseph C. Weber. | May 1983 | 5.00 |
| 42. | THE ECONOMY OF BIG HORN, HOT SPRINGS, PARK AND WASHAKIE COUNTIES, WYOMING, WORLAND BLM DISTRICT, by John R. McKean and Joseph C. Weber. | May 1983 | 5.00 |
| 43. | THE ECONOMY OF EASTERN WYOMING, CASPER BLM DISTRICT, by John R. McKean and Joseph C. Weber. | May 1983 | 5.00 |
| 44. | DIRECT AND INDIRECT ECONOMIC EFFECTS OF HUNTING AND FISHING IN COLORADO - 1981, by John R. McKean and Kenneth C. Nobe. | Jan. 1984 | 5.00 |
| 45. | THE ECONOMY OF SOUTHWEST COLORADO, DESCRIPTION AND ANALYSIS, by John R. McKean and Wendell D. Winger. | May 1984 | 5.00 |
| 46. | EXPANSION OF WATER DELIVERY BY MUNICIPALITIES AND SPECIAL WATER DISTRICTS IN THE NORTHERN FRONT RANGE, COLORADO, 1972-1982, by Raymond L. Anderson. | Oct. 1984 | 4.00 |
| 47. | MANAGING AN INTERRELATED STREAM-AQUIFER SYSTEM: ECONOMICS, INSTITUTIONS, HYDROLOGY, by J.T. Daubert, R.A. Young and H.J. Morel-Seytoux. | | |
| 48. | EVAPOTRANSPIRATION OF PHREATOPHYTES IN THE SAN LUIS VALLEY, COLORADO, by Frederick L. Charles. | June 1987 | 5.00 |
| 49. | ECONOMIC BENEFITS AND COSTS OF THE FISH STOCKING PROGRAM AT BLUE MESA RESERVOIR, COLORADO, by Donn M. Johnson and Richard G. Walsh. | Dec. 1987 | 4.00 |

| | | | |
|-----|--|--------------|-------|
| 50. | WILDLIFE AND FISH USE ASSESSMENT: LONG-RUN FORECASTS OF PARTICIPATION IN FISHING, HUNTING AND NONCONSUMPTIVE WILDLIFE RECREATION, by R.G. Walsh, D.A. Harpman, K.H. John, J.R. McKean and Lauren LeCroy. | Dec. 1987 | 5.00 |
| 51. | STATUS, ISSUES AND IMPACTS OF COAL SLURRY PIPELINES ON AGRICULTURE AND WATER, by Ari M. Michelsen and John W. Green. | Jan. 1988 | 5.00 |
| 52. | COUNTY INPUT-OUTPUT MODELS FOR THE STATE OF WYOMING: WITH ANALYSIS OF NEW INDUSTRIES AND NEW CONSTRUCTION IMPACTS, by J.R. McKean and Agricultural Enterprises, Inc. | Oct. 1987 | 5.00 |
| 53. | GUNNISON COUNTY INTERINDUSTRY SPENDING AND EMPLOYMENT ATTRIBUTED TO FISHING AT BLUE MESA RESERVOIR, by J.R. McKean, D.M. Johnson and R.G. Walsh. | Dec. 1988 | 5.00 |
| 54. | REVIEW OF OUTDOOR RECREATION ECONOMIC DEMAND STUDIES WITH NONMARKET BENEFIT ESTIMATES, 1968-1988, by R.G. Walsh, D.M. Johnson and J.R. McKean. | Dec. 1988 | 6.00 |
| 55. | A COMPARISON OF LONG-RUN FORECASTS OF DEMAND FOR FISHING, HUNTING, AND NON-CONSUMPTIVE WILDLIFE RECREATION BASED ON THE 1980 AND 1985 SURVEYS, by Richard G. Walsh, Kun H. John and John R. McKean. | Dec. 1988 | 4.00 |
| 56. | MULTIVARIATE METHODS FOR DETECTING WATER QUALITY TRENDS, by Jim C. Loftis, Charles H. Taylor and Phillip L. Chapman. | Feb. 1990 | 5.00 |
| 57. | REAL-TIME RESERVOIR OPERATION DECISION SUPPORT UNDER THE APPROPRIATION DOCTRINE, by John R. Eckhardt. | May 1991 | 10.00 |
| 58. | VALUING TIME IN TRAVEL COST DEMAND ANALYSIS BY VISITORS TO BLUE MESA RESERVOIR, by John R. McKean, Richard G. Walsh and Donn M. Johnson. | June 1991 | 5.00 |

SPECIAL REPORT SERIES

| | | | |
|----|---|---------------|-------|
| 1. | DESIGN OF WATER AND WASTEWATER SYSTEMS FOR RAPID GROWTH AREAS AND RESORTS, by J. Ernest Flack. | 1976 | 5.00 |
| 2. | ENVIRONMENT AND COLORADO - A HANDBOOK, edited by Phillip O. Foss. | 1976 | 5.00 |
| 3. | IRRIGATION DEVELOPMENT POTENTIAL IN COLORADO, by Norman K. Whittlesey. | May 1977 | 5.00 |
| 4. | ENVIRONMENTAL INVENTORY OF A PORTION OF PICEANCE BASIN IN RIO BLANCO COUNTY, COLORADO. | Dec. 1971 | 11.00 |
| 5. | A GUIDE TO COLORADO WATER LAW, by Ward H. Fischer, Steven B. Ray, Glen D. Rask and Windol L. Wyatt. | Sept. 1978 | 3.50 |
| 6. | NETWORK ANALYSIS OF RAW WATER SUPPLIES UNDER COMPLEX WATER RIGHTS AND EXCHANGES: DOCUMENTATION FOR PROGRAM MODSIM3, by J.W. Labadie, Andrew M. Pineda and Dennis A. Bode. | Mar. 1984 | 5.00 |