
**A SYSTEMATIC TREATMENT
OF THE
PROBLEM OF INFILTRATION**

by

Dr. H. J. Morel-Seytoux

June 30, 1971

ENVIRONMENTAL RESOURCES



CENTER

**Colorado State University
Fort Collins, Colorado**

**Completion Report Series
No. 23**

A SYSTEMATIC TREATMENT OF THE PROBLEM OF INFILTRATION

Completion Report

OWRR Project No. B-033-Colorado
Period July 1, 1968 - June 30, 1971

by

Dr. H.J. Morel-Seytoux
Department of Civil Engineering
Colorado State University

submitted to

Office of Water Resources Research

U.S. Department of Interior
Washington D. C. 20240

June 30, 1971

The work upon which this report is based was supported by funds provided by the U.S. Department of Interior, Office of Water Resources Research, as authorized under the Water Resources Research Act of 1964; and pursuant to Grant Agreement No. 14-01-0001-1886.

ENVIRONMENTAL RESOURCES CENTER
Colorado State University
Fort Collins, Colorado

Norman A. Evans, Director

TABLE OF CONTENTS

<u>Part</u>		<u>Page</u>
A	Abstract	iii
B	Research Objectives	1
C	Achievements of contract	2
	1. Mathematical formulation of the problem.	2
	2. The PHUC Procedure	4
	3. The BRUSTKERN Procedure.	4
	4. The NOBLANC Procedure.	13
	5. Summary of Results	14
D	List of Publications	21
E	Additional References.	21

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1	Infiltration Response to Successive Bursts of Rainfall	5
2	Saturation and Infiltration Responses to Rainfall	6
3	Comparison of Infiltration Rates When Depth of Water Table (D) Varies.	8
4	Infiltrometer Data	10
5	Comparison of Cumulative Infiltration Volume When Depth of Water Table Varies.	12
6	Advance of the Saturation Profile in a Semi-Infinite Medium	16
7	Saturation Profile in a Semi-infinite Medium	17
8	Saturation Profile. Water Table at 150 cm.	18
9	Comparison of Infiltration Rates as Obtained by the Brustkern Procedure [12] and by the Noblanc Procedure (Water Table at Depths of 150 and 300 cm.	19
10	A Comparison of Infiltration Rates as Obtained from a Finite Difference Solution and Brustkern's Solution	20

ABSTRACT

The research described briefly in this completion report has shown that the effects of air movement and air compressibility on infiltration in soil columns are important. For soils underlain by a relatively impervious layer or by a shallow water table errors of the order of 30% can result.

It was found that approximate solutions to the two-phase formulation of the problem of infiltration (i.e. accounting for both water and air movement) give more accurate predictions than exact solution to the unsaturated flow formulation (i.e. accounting only for water movement). In fact the two-phase theory has the significant advantage to account for observed experimental results which cannot be modeled by the one-phase flow theory.

Finally the approximate solutions are not only more accurate but also more economic. The costs of computer runs for prediction of infiltration rates by the analytic approximate method were of the order of one tenth of the costs involved in the numerical finite-difference solution of the two-phase flow equations.

KEYWORDS: *Infiltration, *Two-Phase Flow, *Air Compressibility, Air Counterflow, Numerical Methods

RESEARCH OBJECTIVES

In the original proposal, February 1968, the objectives were listed as follows:

"The overall objective of the research is to develop a mathematical model of infiltration capable of responding to any spatial and temporal pattern of rainfall or its lack. In this form the model would be readily capable of integration into a general model simulating the hydrologic response of a watershed.

In a first phase the objectives will be more limited. In essence the two principal objectives are:

(1) The development of a one-dimensional model of water infiltration into a soil column under realistic conditions of varying water supply at the surface, non-uniform initial moisture conditions, heterogeneous soil characteristics and the effect of hysteresis, and

(2) The development of a less general two-dimensional model of water infiltration to model primarily the influence of spatial variation of the available water supply on infiltration."

ACHIEVEMENTS OF CONTRACT

It is not desirable to repeat in this completion report all the results obtained over the past three years and the detailed procedures by which they were obtained. These results and procedures can be found in 2 theses [1,3], 1 dissertation [2], 1 published paper [4], and several submitted papers [5,6,7,8,9]. Rather a brief review of the methods of attack and a sample of results will be given.

1. Mathematical formulation of the problem - For simplicity the one-dimensional vertical case is discussed. In short, mathematically, the problem of infiltration is one of solving simultaneously the equations of mass conservation for both water and air phases, that is:

$$\phi \frac{\partial(\rho_w S_w)}{\partial t} + \frac{\partial}{\partial z} (\rho_w V) = 0 \quad (1)$$

$$\phi \frac{\partial(\rho_a S_a)}{\partial t} + \frac{\partial}{\partial z} (\rho_a V_a) = 0 \quad (2)$$

subject to the constraints of definition,

$$S_w + S_a = 1 \quad (3)$$

the requirements of Darcy's law generalized to several phases [10], namely:

$$V_w = -k \frac{k_{rw}}{\mu_w} \left[\frac{\partial \rho_w}{\partial z} - \rho_w g \right] \quad (4)$$

$$V_a = -k \frac{k_{ra}}{\mu_a} \left[\frac{\partial \rho_a}{\partial z} - \rho_a g \right] \quad (5)$$

the capillary relation:

$$P_c(S_w) = P_a - P_w \quad (6)$$

and the proper hydrologic initial and boundary conditions, where the following symbols have been used:

- ϕ = porosity
- t = time
- ρ_w, ρ_a = water, air density
- S_w, S_a = water, air saturation
- z = vertical coordinate, oriented positive downward
- V_w, V_a = water, air velocity in Darcy sense
- k = intrinsic permeability
- k_{rw}, k_{ra} = relative permeabilities to water, to air
- μ_w, μ_a = water, air viscosity
- p_w, p_a = water, air pressure
- g = acceleration of gravity
- p_c = capillary pressure



It goes without saying that the problem is not simple. Three approaches were pursued for the following reasons. First, it was realized that it probably (almost certainly) would not be feasible to solve the above complete system of equations exactly and to expect the corresponding model to be used economically in day to day hydrologic practice. On the other hand it was felt that simplified models would not receive acceptance in the profession unless it could be shown that they provided acceptably good answers. Thus one method was followed in which no simplifications were made. The resulting model is not meant to be used operationally but to serve as a standard against which to test other procedures. This procedure will be named after the student who implemented it and referred to as the PIUC procedure for brevity. To the contrary, in another procedure, as many simplifying assumptions as possible

were made which seemed to be physically acceptable a priori. This procedure (the BRUSTKERN procedure), if successful, is meant to become an economic technique in everyday hydrologic practice. For fear of having gone too far a sort of middle of the road procedure was followed (the NOBLANC procedure). It is the purpose of the next sections to discuss each of the three procedures and to show results obtained by each method.

2. The PHUC procedure - It is a finite-difference approach to the solution of the problem. It makes no assumptions at all, except those inherent in the finite-difference algebraic approximations of a system of partial differential equations. In its present state the PHUC program can handle all hydrologically meaningful initial and boundary conditions, including effects of water movement, air movement, air compressibility and hysteresis but not of heterogeneities in soil conditions. The versatility of this program is well illustrated in Figure 1 which shows the infiltration response curve to two bursts of rainfall, for a soil of hydraulic conductivity of 0.55×10^{-3} cm/sec and a depth 40 cm above an impervious boundary. The initial saturation of the soil was assumed uniform and equal to residual water saturation (0.2). Naturally, the initial conditions for saturation at the start of the second burst is not one of uniform saturation. Saturation profiles at some important times are shown in Figure 2 as well as the cumulative water heights for rainfall, infiltration and ponding.

3. The BRUSTKERN procedure - This procedure reduces the system of two complex partial differential equations to a system of only one (simpler) partial differential equation and one strictly algebraic equation, namely:

$$\phi \frac{\partial S_w}{\partial t} + \bar{V} \frac{\partial F_w}{\partial z} = 0 \quad (7)$$

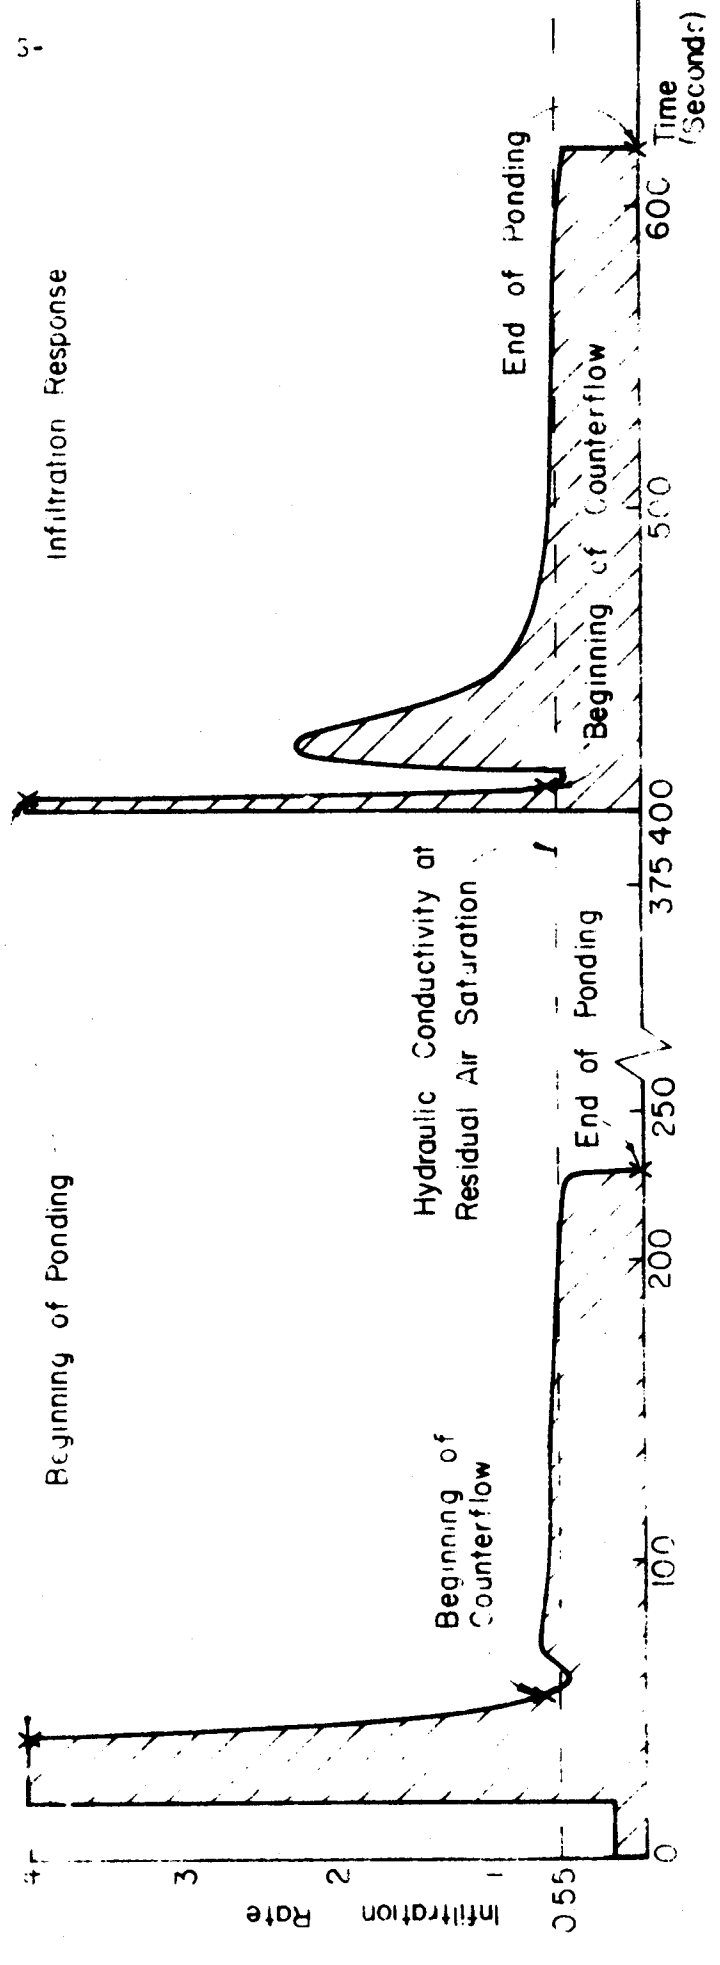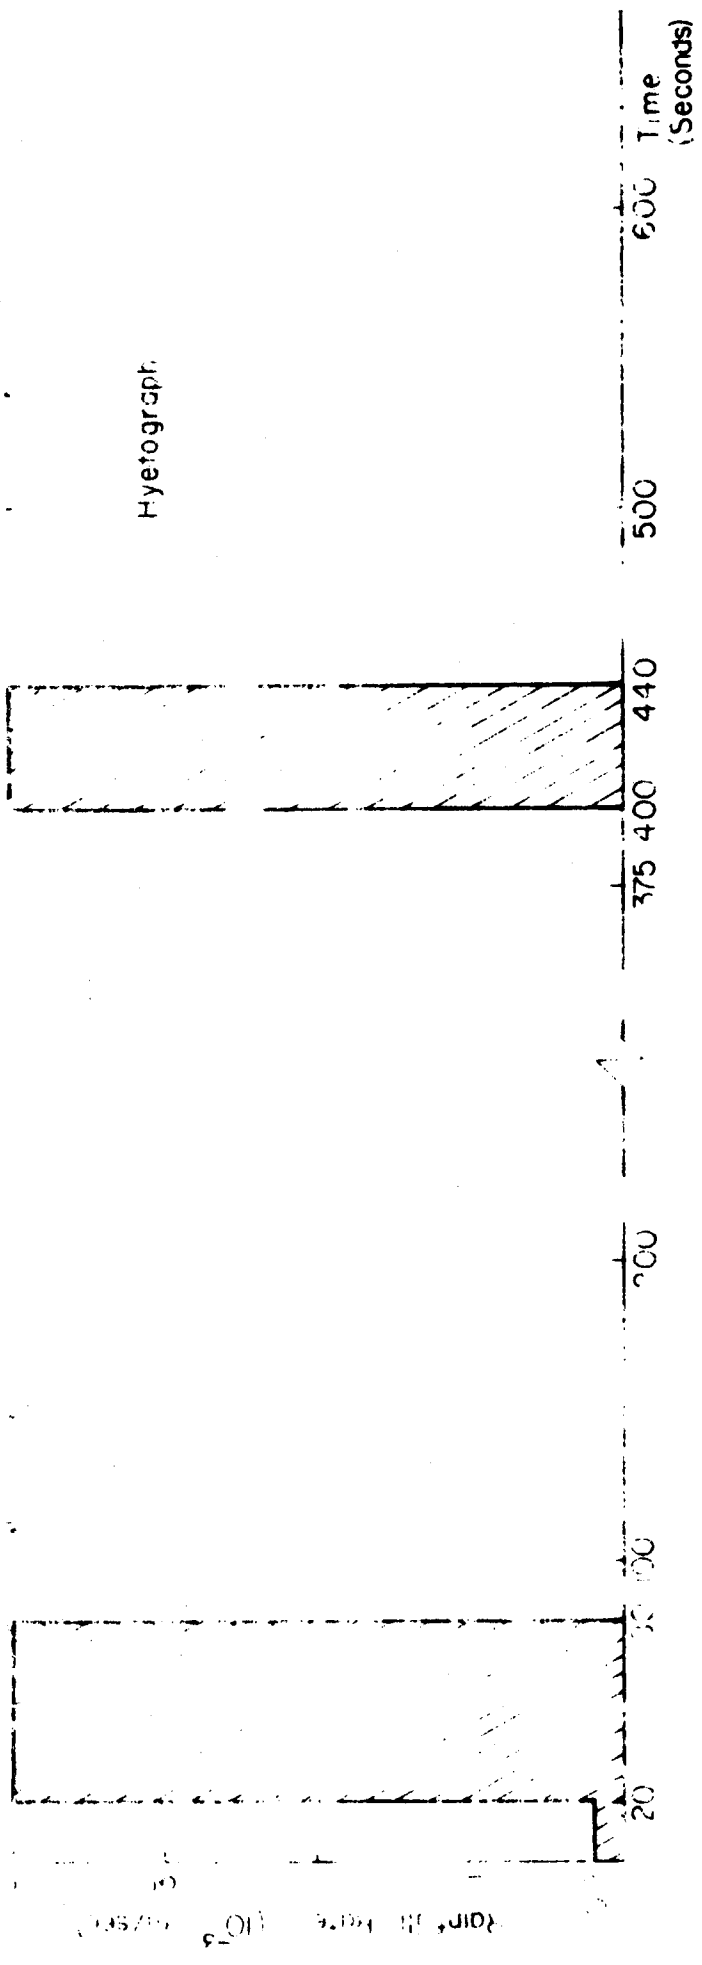

Hydraulic conductivity curves to be used in units of centimeters per second.

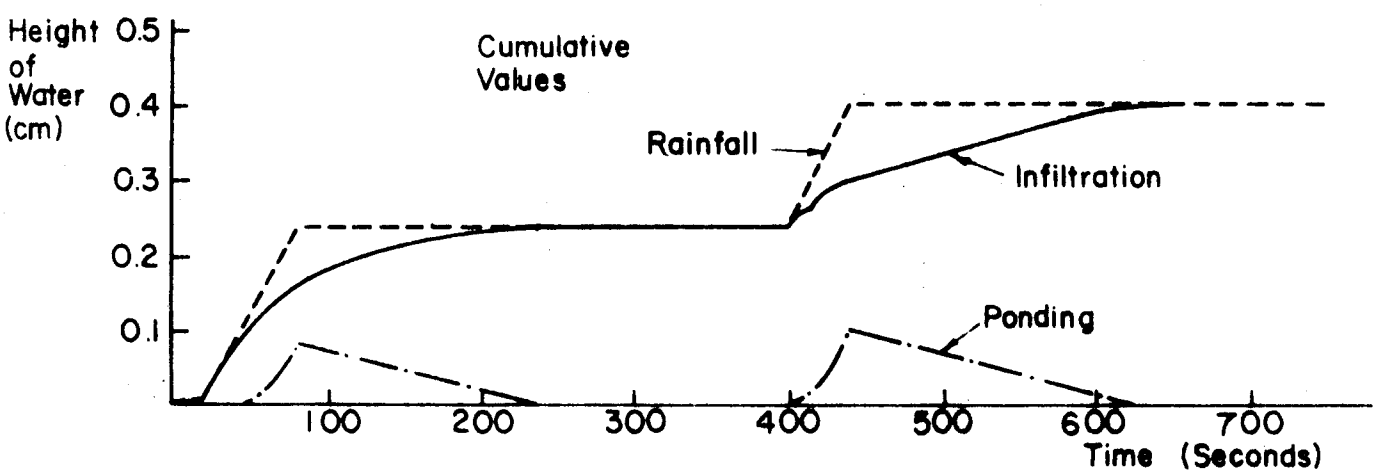
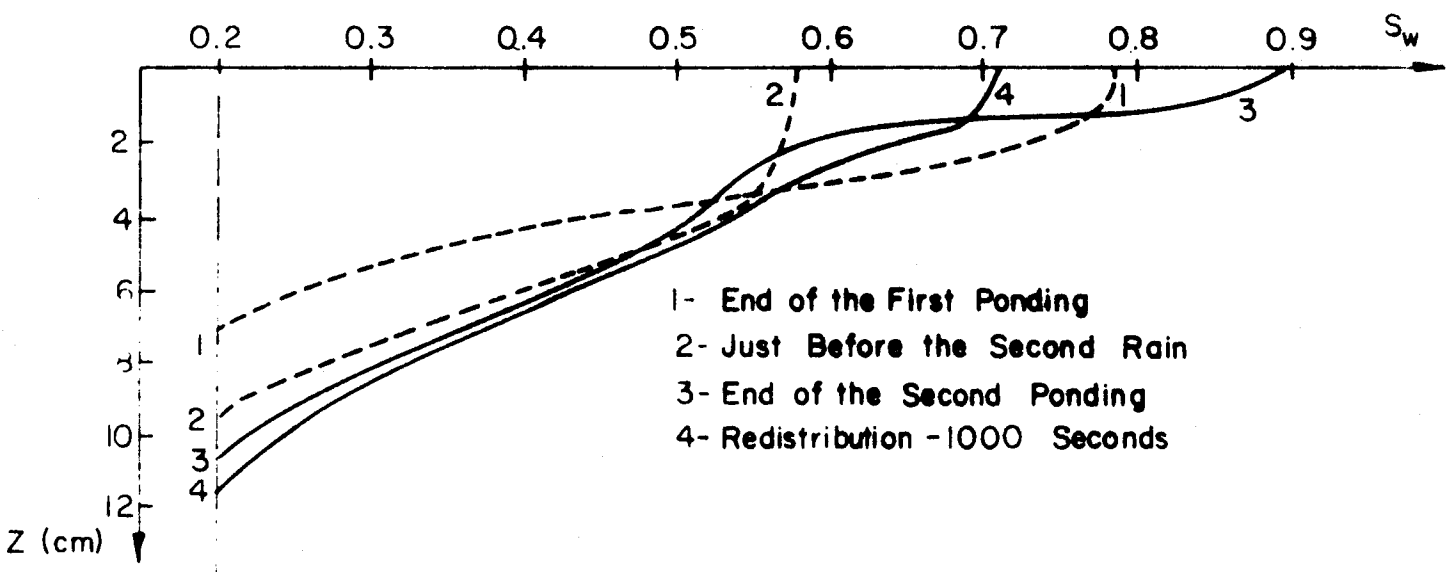
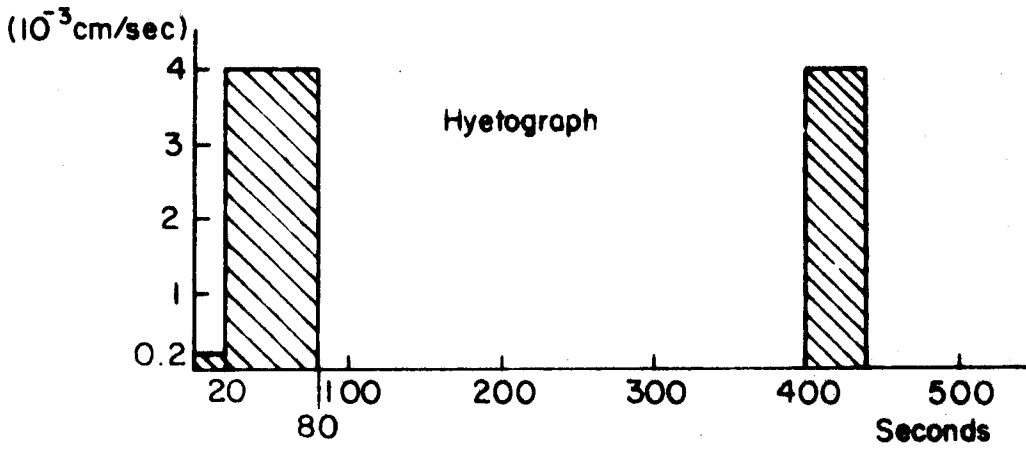


Figure 2 Saturation and Infiltration Responses to Rainfall

and

$$\bar{V} = \frac{(p_{a1} - p_{a2}) + g\rho_w \int_1^2 f_w dz + \int_1^2 f_w dp_c}{\int_1^2 \frac{dz}{k \left(\frac{ra}{\nu_a} + \frac{rw}{\nu_w} \right)}} \quad (8)$$

where the additional following symbols have been used:

V = total algebraic velocity i.e., $V_w + V_a$

\bar{V} = average total velocity

F_w = fractional flow function neglecting capillarity [6,8]

p_{a1}, p_{a2} = air pressure at location 1 (ground surface), at location 2 (ahead of wetting front)

f_w = fractional flow function when both gravity and capillarity are neglected [4,10].

The new system of equations (7) and (8) is particularly simple because Eq. (7) can be solved explicitly [40] and Eq. (8) involves integration of known functions of saturation, coordinate and time. It is therefore simpler to solve this system than Richard's equation [11] even though the effects of air movement and air compressibility, albeit in a gross way, are included in the system. The superiority of this procedure is well demonstrated by the results of Figure 3. The case investigated is that of a constant ponding of 5 cm of water over soil columns of various depths above an impervious boundary for a uniform initial water saturation equal to residual saturation. It is clear from Figure 3 that the soil depth is a factor in the shape of the infiltration curve. On the other hand, the solution of Richard's equation always corresponds to the solution $D = \infty$ i.e. semi-infinite medium until the wetting front reaches the boundary. After such time the

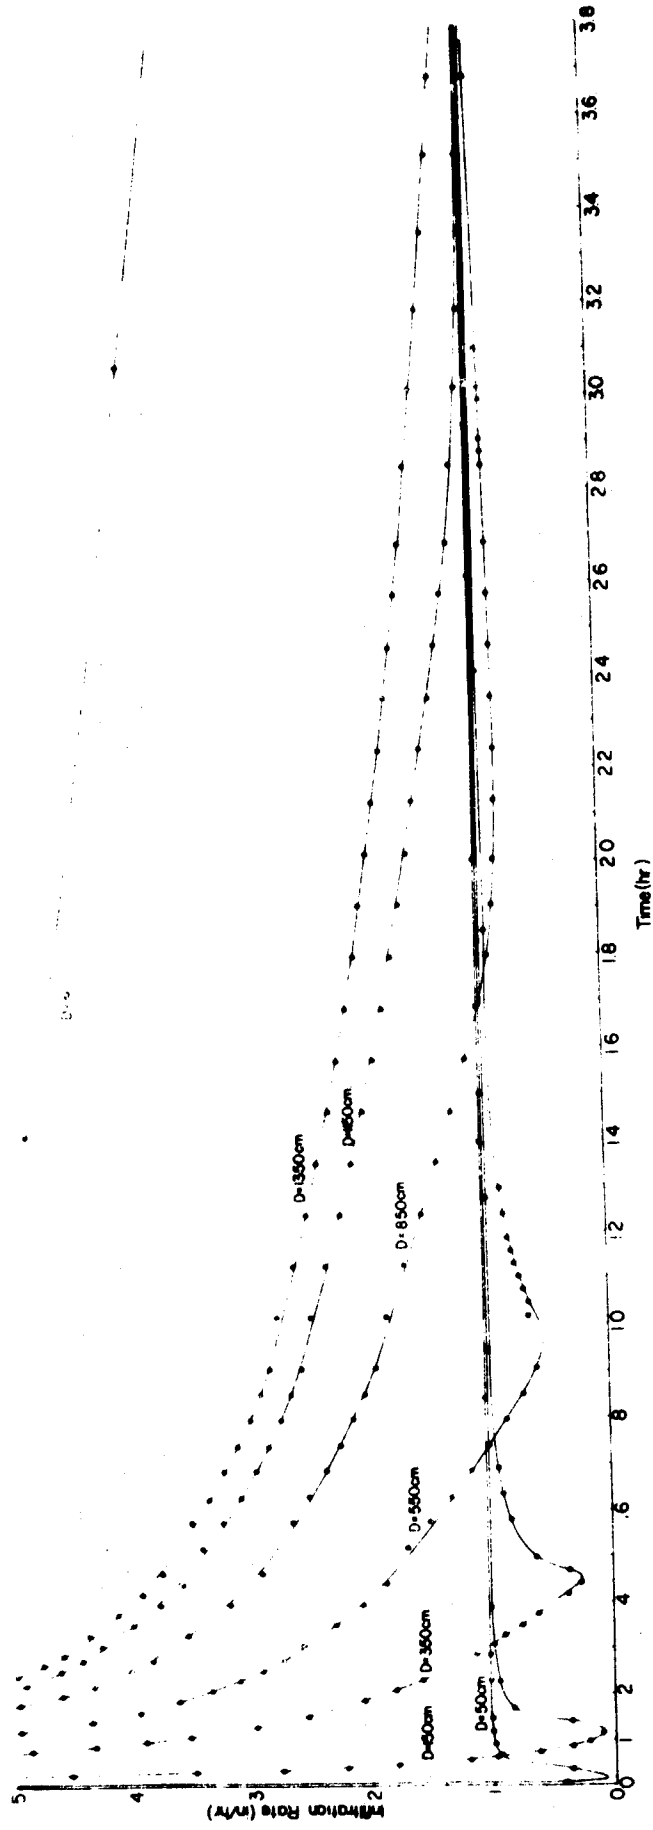


Figure 3. Comparison of Infiltration Rates When Depth of Water Table (D) Varies

infiltration rate rapidly drops to zero. With the Richard's equation the presence of the lower impervious boundary cannot be felt until the wetting front reaches it. Thus until such time occurs the solution cannot be different from that for a semi-infinite medium. If air movement and air compressibility are ignored, as they are in Richard's equation, it is immaterial whether the uniform saturation extends a few inches or a few miles ahead of the wetting front; the same infiltration rate is calculated. In fact, however, this is not the case. As shown in Figure 3 the presence of the lower impervious boundary is felt rapidly and significantly. The air compression wave travels much more rapidly than the wetting front. The air pressure build up slows down the infiltration rate. A point is reached when it is so large that the air breaks through. The air pressure is reduced and as a result the infiltration rate picks up. Fairly rapidly an equilibrium is reached when compressibility is no longer a factor and the infiltration rate equals the volumetric rate of air escape.

The presence of the dip in the infiltration rate was at first intriguing. Though it was expected that the infiltration rate would be affected by the presence of the impervious lower boundary the dip came as a surprise. However, after reflection, the presence of the dip seemed perfectly understandable physically. Then in at least one paper [12] reporting experiments of infiltration in finite soil columns the data displayed the dip. A new glance at old results of double ring infiltrometer tests conducted by CSU staff to study the recharge potential of river beds showed unmistakably (?) the existence of such a dip (Figure 4). The word "unmistakably" is used in a "tongue in cheek" context. One may question the accuracy of the measurements. Most field

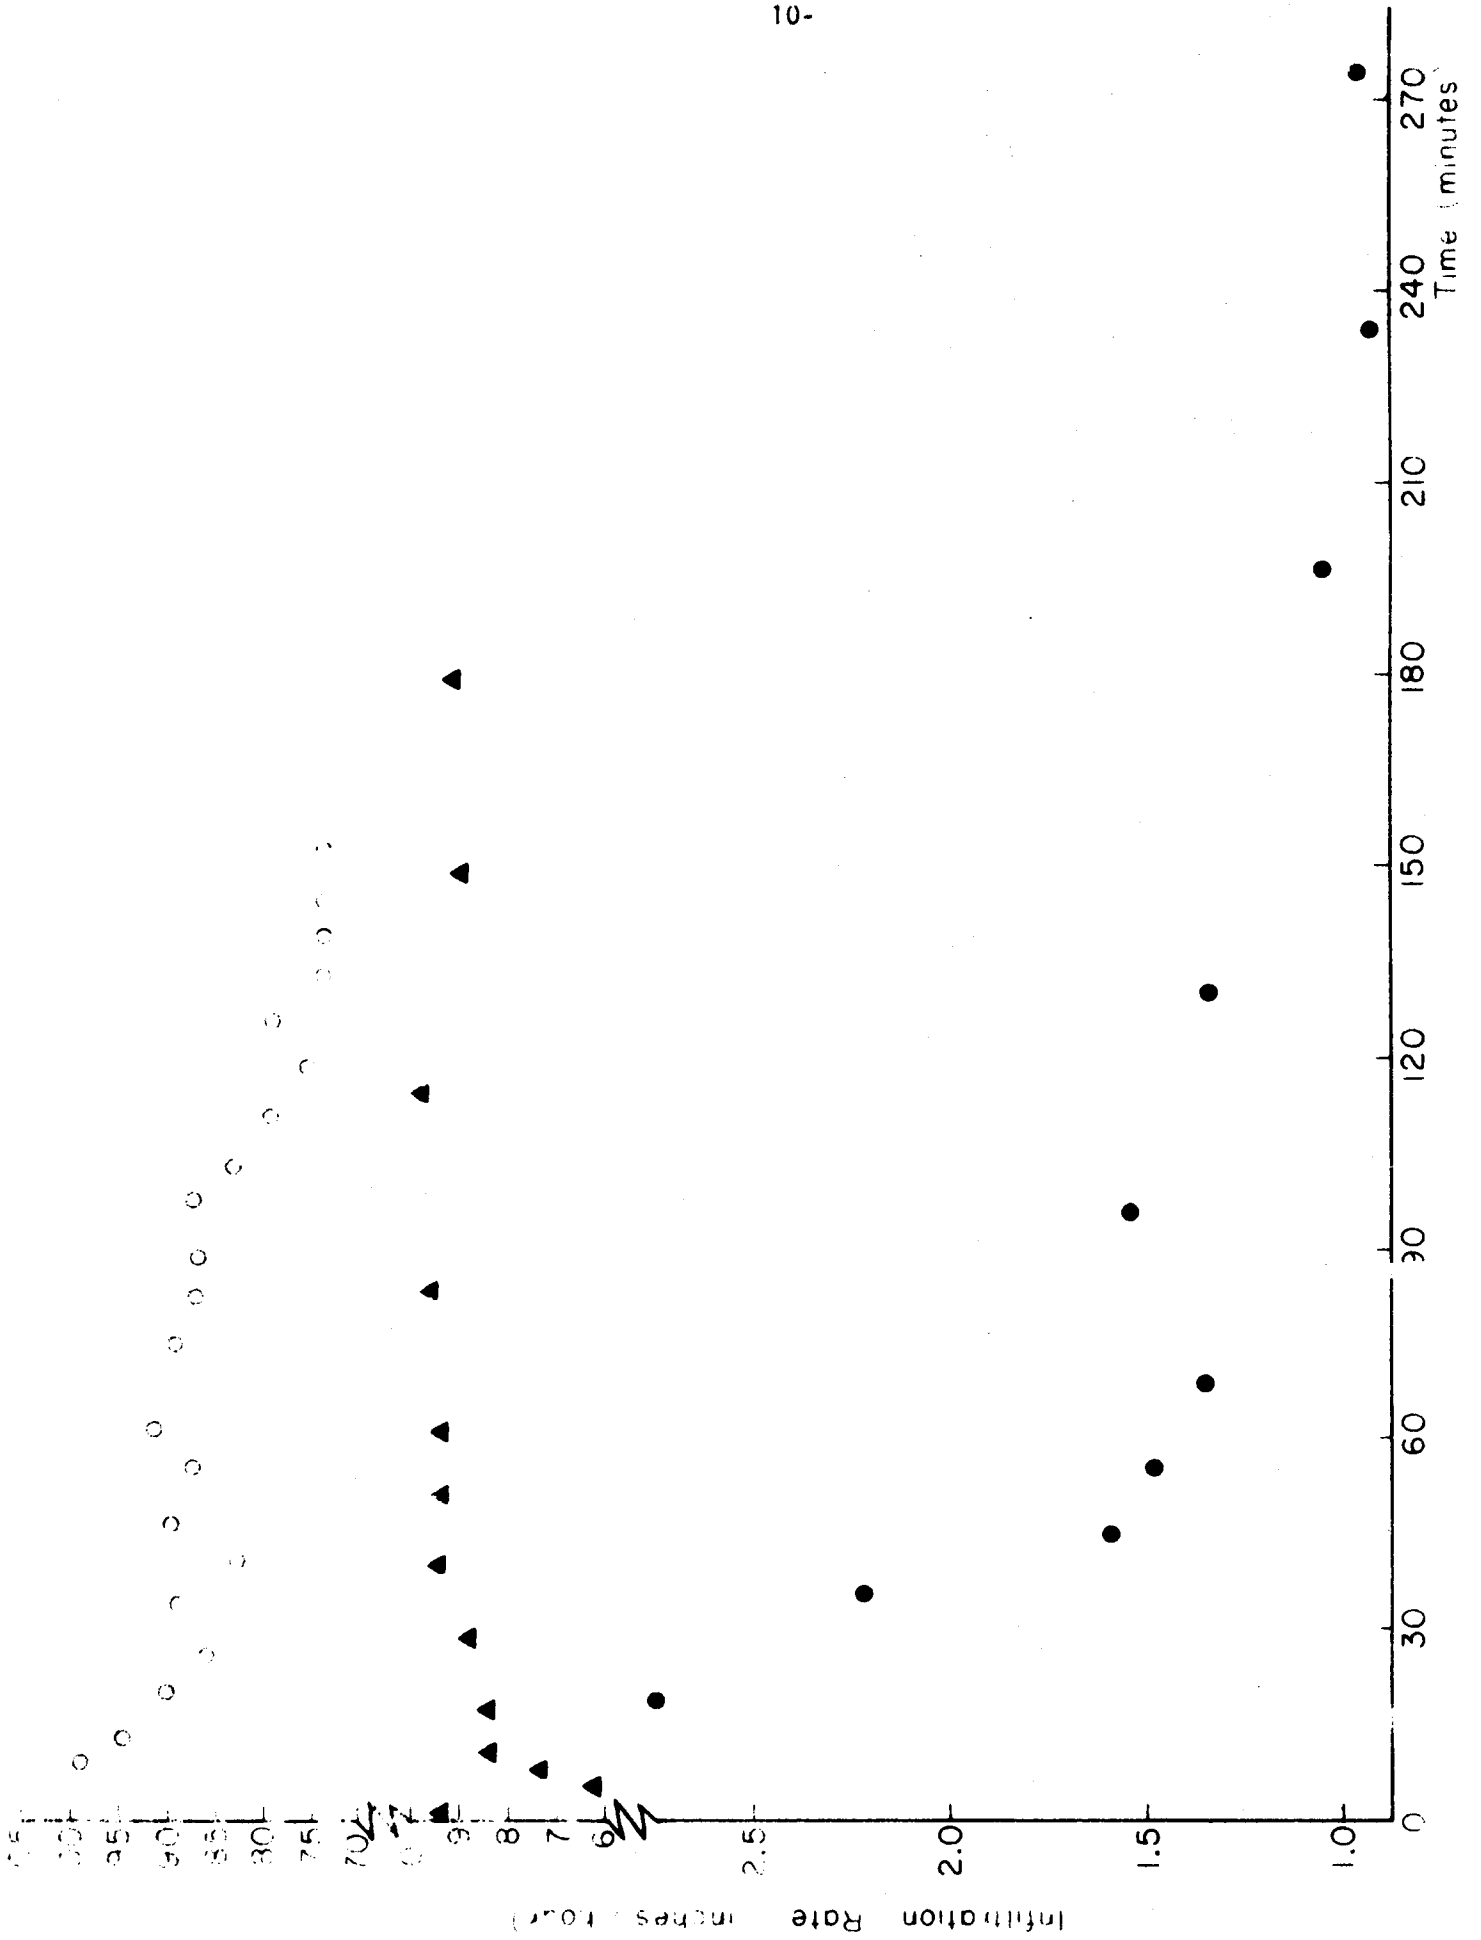


Figure 1. Infiltration rate data.

experimenters have tended to disregard the fluctuations in the data and fit monotonically decreasing curves to the data. Based on the results of the current study it is felt that the "dip" in the infiltration rates is real. By the same token if the "dip" is real then so must be the "hump" that follows it. This hump is not predicted by the BRUSTKERN procedure. The hump could be present even for a medium that is perfectly homogeneous in the horizontal plane. If that is the case the BRUSTKERN procedure in its present form is treating the compressibility effect too crudely to predict it. It is possible however that the hump is due to the superposition of say two response curves corresponding to the same depth but to two different hydraulic conductivities. Whereas the superposition of two monotonically decreasing functions is of same nature the superposition of curves of the type shown on Figure 3 can have a hump. Finally recently Dr. D. McWhorter,* [13], provided the results of experiments of infiltration under constant head of ponding for various soil columns, shown in Figure 5. Even though the infiltration results of Figures 3 and 5 are for different soils (both sands, however) and for different wetting fluids (Dr. McWhorter used oil in his experiments) the time of the dips for the depth 150 cm (Figure 3) and 185 cm (Figure 5) are of the same order of magnitude, respectively 8 and 16 minutes. The corresponding numbers for the depth 350 cm (Figure 3) and 393 cm (Figure 5) are 28 and 65. A quick correction (assuming linearity) for depth gives the following ratios:

$$\frac{16}{7} \times \frac{150}{185} = 1.9 \qquad \frac{65}{28} \times \frac{350}{393} = 2.1$$

* Assistant Professor of Agricultural Engineering, Colorado State University.

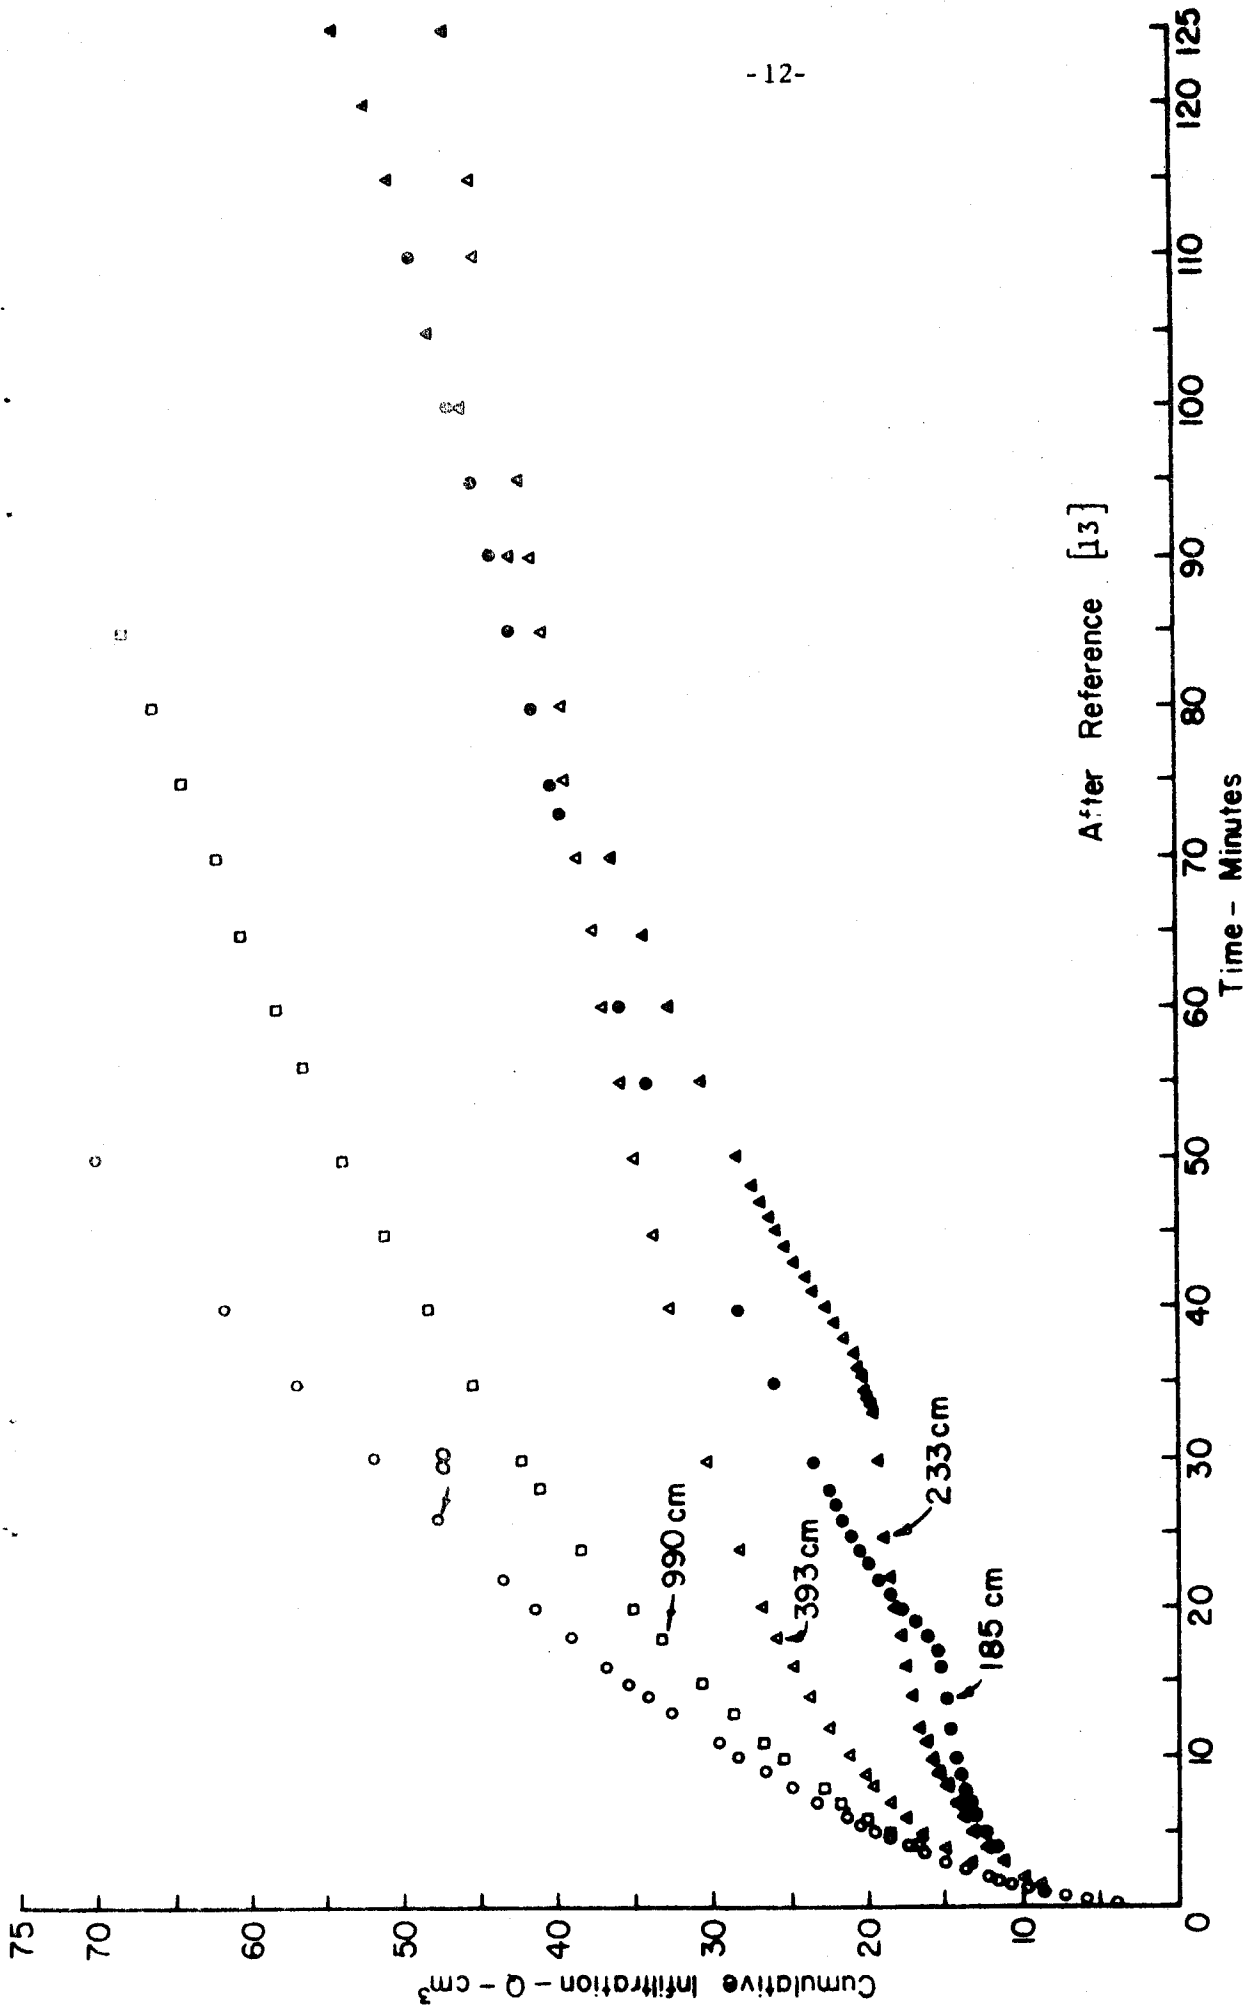


Figure 5 - Comparison of cumulative infiltration volume when depth of water table varies.

it is clear that close agreement exists qualitatively and in order of magnitude.

Note again that the data show clearly the presence of a dip in infiltration rates and indicate also the existence of a hump. These data obtained under carefully controlled laboratory conditions confirm the value of the BRUSTKERN procedure and show that the dips and humps of the field tests must be taken seriously.

4. The NOBLANC procedure - As with the BRUSTKERN procedure the system of two complex partial differential equations is reduced to a system of only one partial differential equation and one strictly algebraic equation. The complete partial differential equation for saturation is of the form:

$$\phi \frac{\partial S_w}{\partial t} + \bar{V} F'_w \frac{\partial S_w}{\partial z} + \frac{k}{\mu_a} \frac{\partial}{\partial z} \left[E \frac{\partial S_w}{\partial z} \right] = 0 \quad (9)$$

where the ' denotes differentiation with respect to saturation and a new symbol was introduced for brevity: $E(s) = k_{ra} f_w p'_c$. A new moving coordinate system is introduced with origin, $\zeta(t)$, relative to the original and fixed z coordinate, namely:

$$Z = z - \zeta(t) . \quad (10)$$

In this new coordinate system eq. (9) becomes:

$$\phi \frac{\partial S_w}{\partial t} + \left(\bar{V} F'_w - \phi \frac{d\zeta}{dt} \right) + \frac{k}{\mu_a} \frac{\partial}{\partial Z} \left(E \frac{\partial S_w}{\partial Z} \right) = 0 \quad (11)$$

To the extent that (in the front region) the rate of deformation of the profile is small compared to the rate of translation of the profile, then it is legitimate to neglect the first term in Eq. (11). Finally

the solution for the profile in the front region is:

$$z = \int_{S_{wi}}^{S_w} \frac{k E(S) dS}{\mu_a \left\{ \phi \frac{d\zeta}{dt} (S - S_{wi}) - \bar{V} [F_w(S) - F_w(S_{wi})] \right\}} \quad (12)$$

The quantity $d\zeta/dt$ is known from a matching condition with a solution of Eq. (9) valid away from the front region. As in the BRUSTKERN procedure an explicit solution for the partial differential equation is available. Thus only numerical quadratures are needed. The integral equation is still given by Eq. (8).

In the BRUSTKERN procedure there exists a sharp front in the solution for the saturation profile, see figure 6. Figure 7, obtained by the NOBLANC procedure indicates that for large times (i.e., after a few hours) the profile in the wetting zone is indeed an extremely sharp front. For large times the BRUSTKERN procedure must be valid. In the early stages and particularly for shallow depths to an impervious boundary the profiles do not show steep wetting fronts (Figure 8). As a result the infiltration curves are noticeably different. However, compared to the high value of hydraulic conductivity at residual air saturation which by the currently accepted theory is supposed to be the asymptotic limit of the infiltration rate, the two curves are not very different (Figure 9). A comparison of results for infiltration predictions by the BRUSTKERN and Phuc methods is shown on Figure 10 for a semi-infinite medium. The agreement is quite good.

5. Summary of Results - The research has shown that:

- a) effects of air movement and air compressibility on infiltration are important,
- b) approximate solutions to the right equations give more

accurate results than exact solutions to the wrong ones (visualize Richard's equation and Phillip's solution) [14], and

c) the approximate solutions (i.e., generated by the BRUSTKERN procedure) are not only more accurate but also more economic.

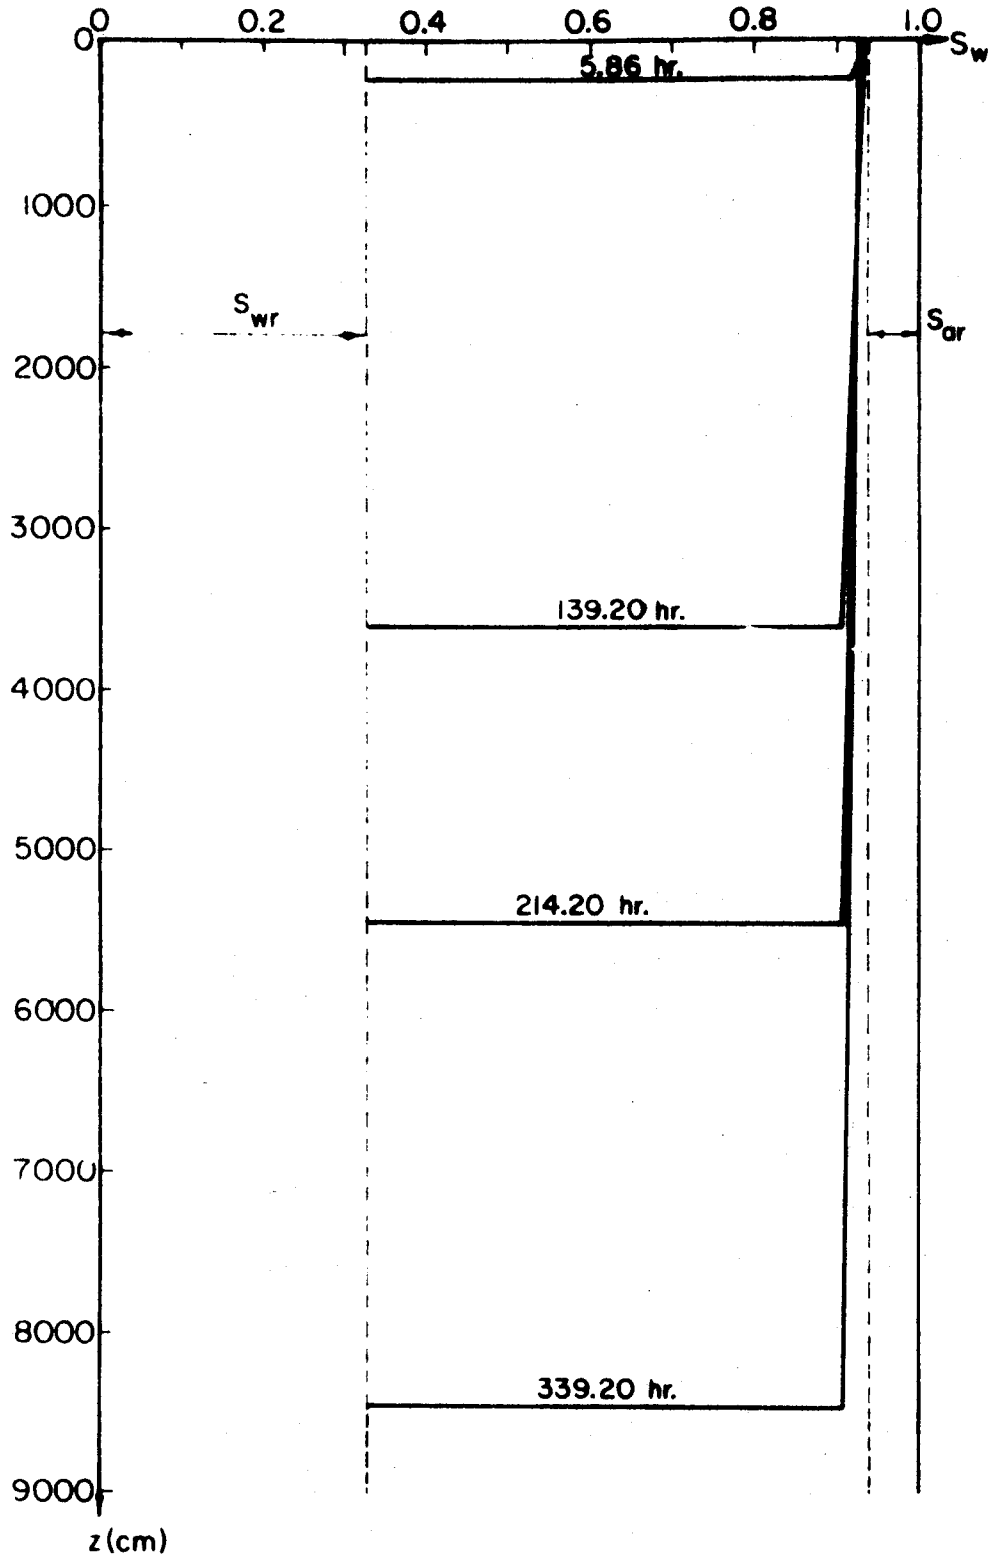


Figure 6. Advance of the Saturation Profile in a Semi-Infinite Medium

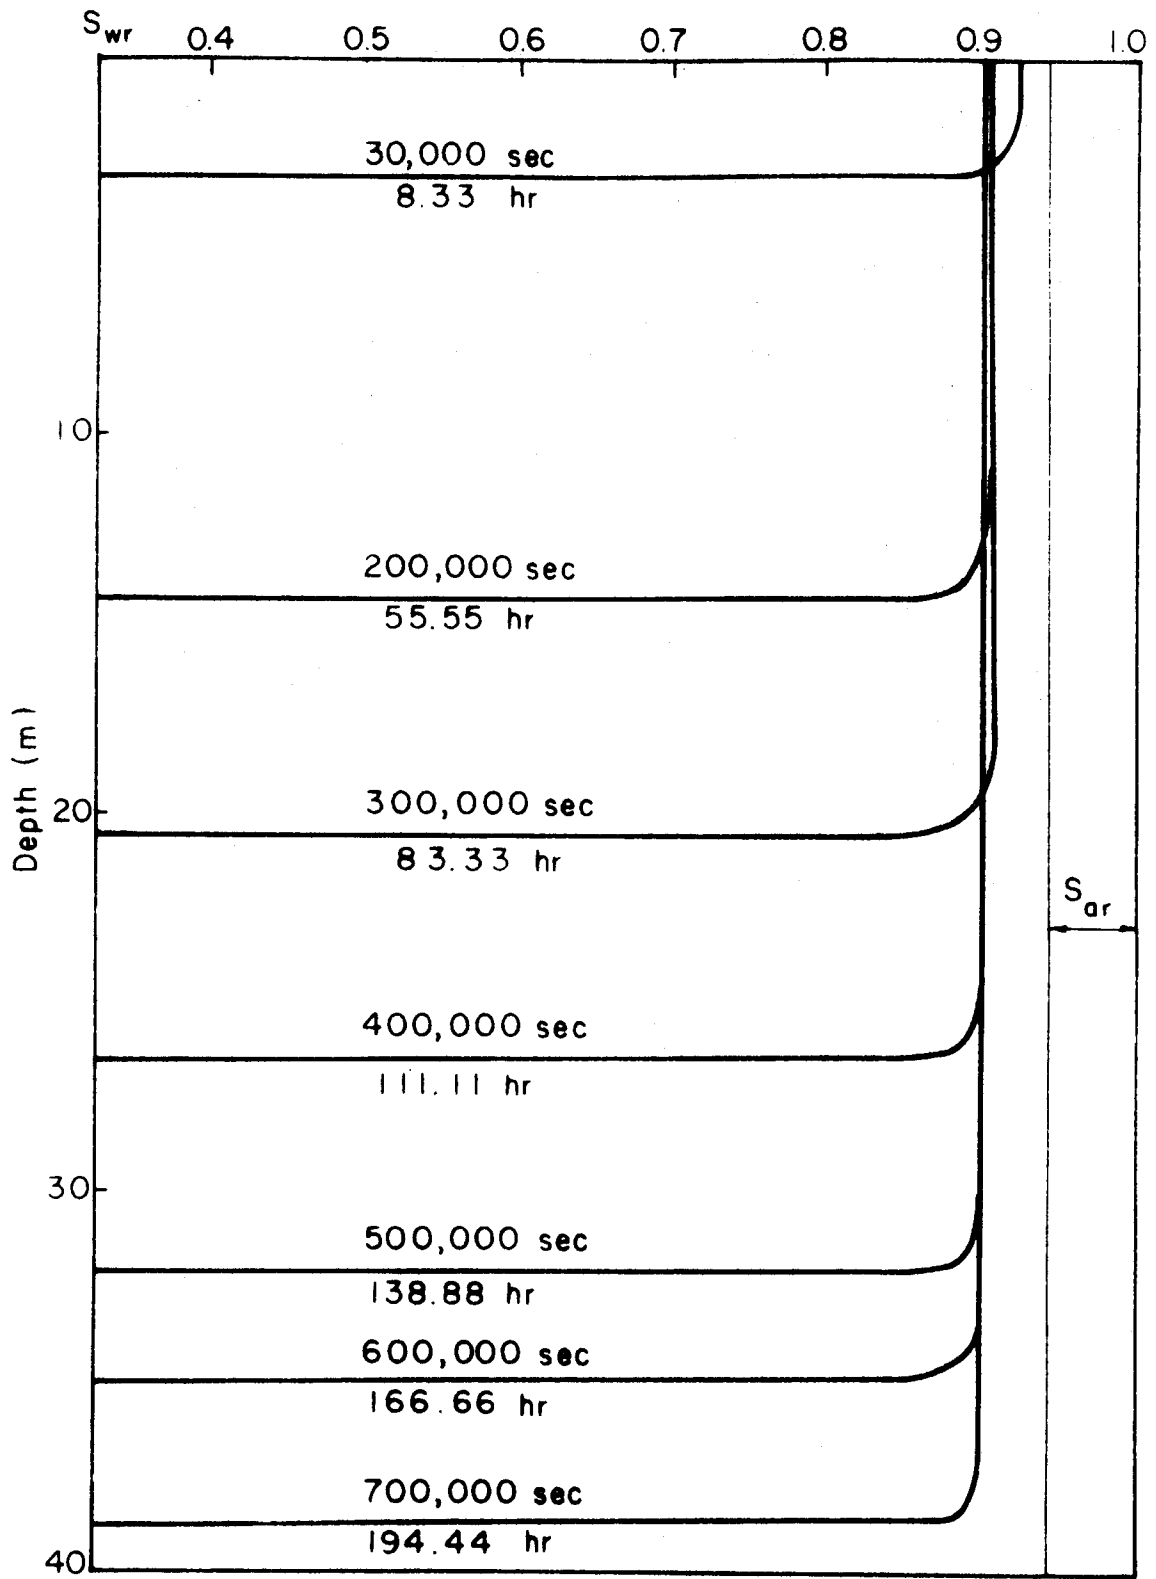


Fig. 7. Saturation profile in a semi-infinite medium.

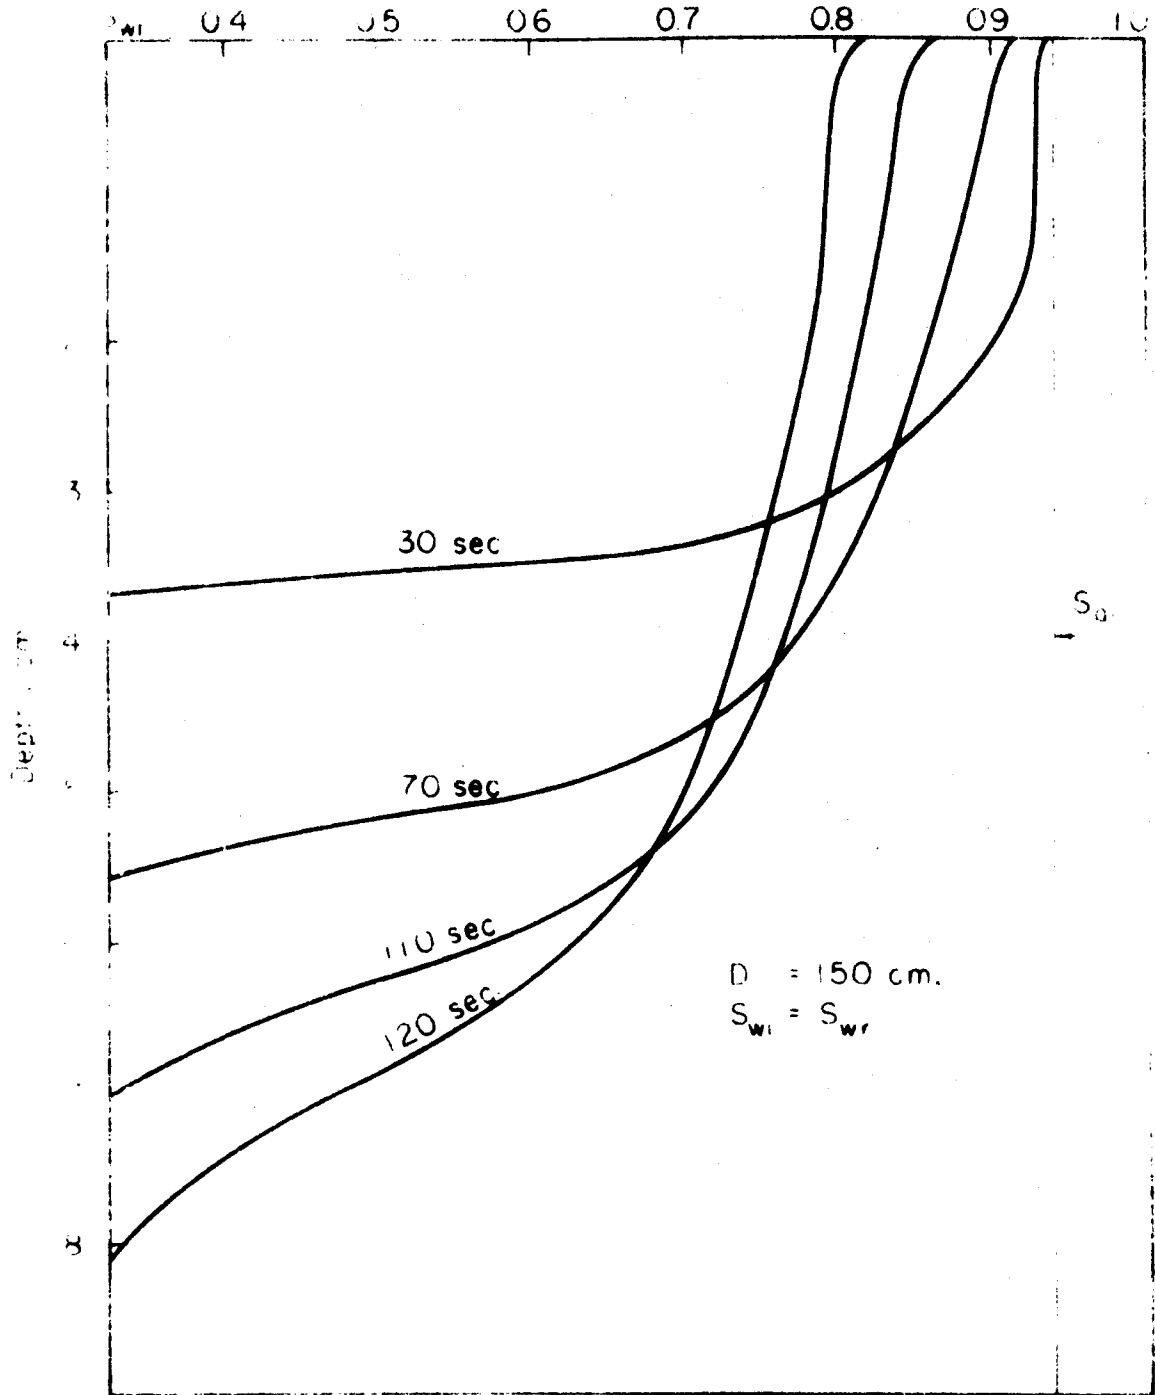


Fig. 8. Saturation profile. Water table at 150 cm

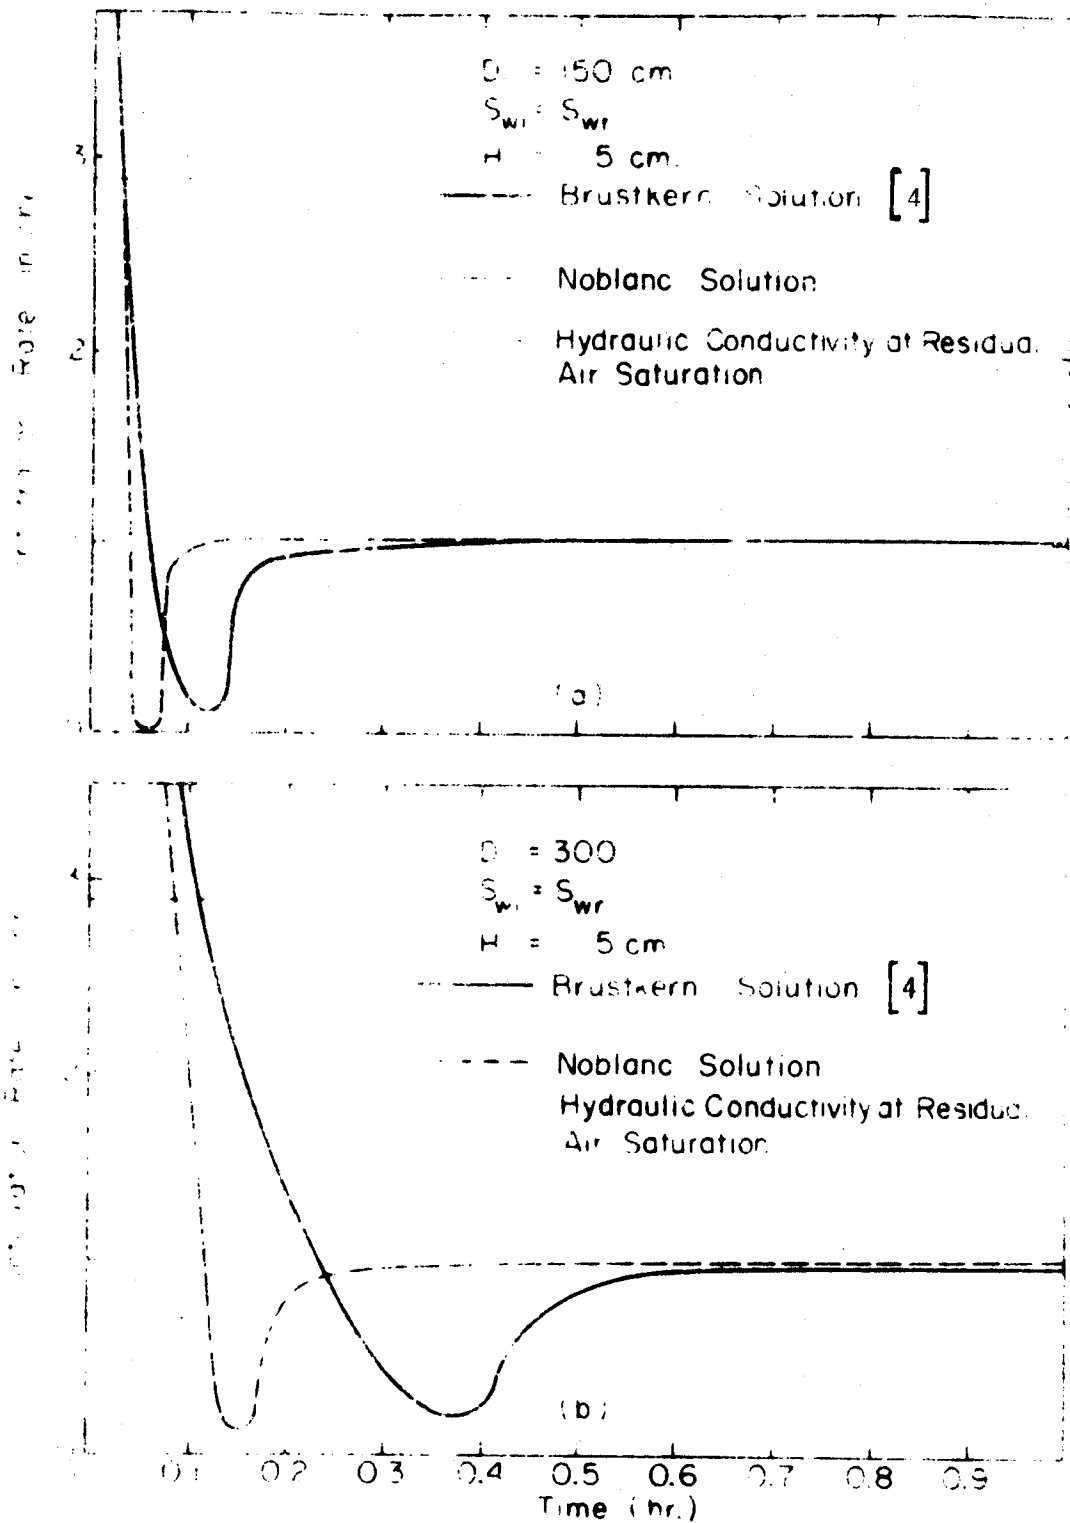


Figure 9 Comparison of Infiltration Rates as Obtained by the Brustkern Procedure [12] and by the Noblanc Procedure (Water Table at Depths of 150 and 300 cm)

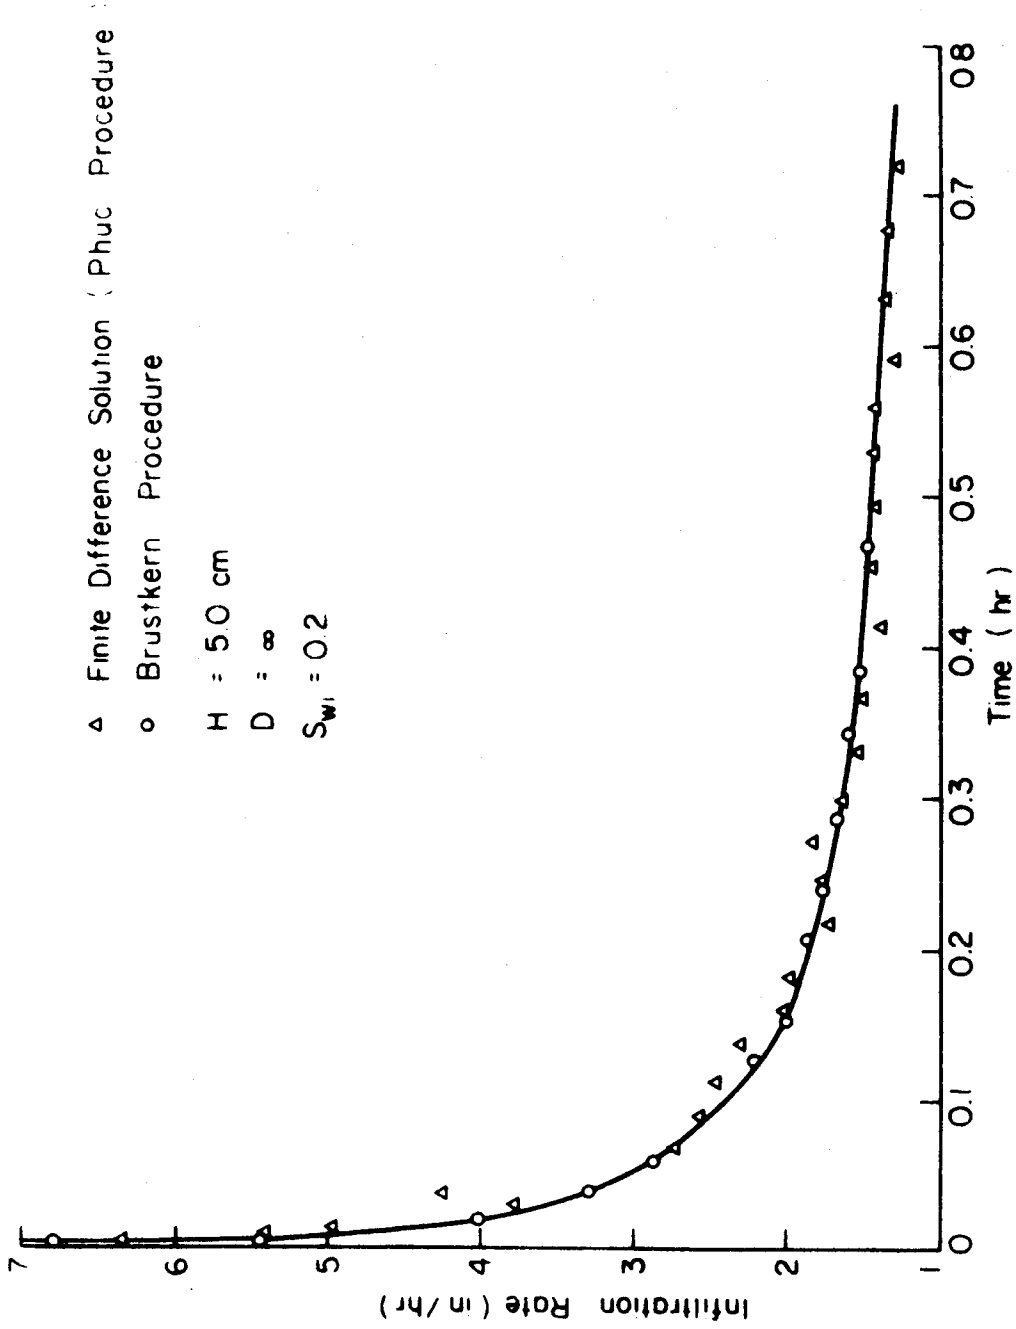


Figure 10. A Comparison of Infiltration Rates as Obtained from a Finite Difference Solution and Brustkern's Solution.

LIST OF PUBLICATIONS

1. Phuc, Le Van, "General One-Dimensional Model for Infiltration," M. S. thesis, Department of Civil Engineering, Colorado State University, Fort Collins, Colorado, December 1969, 83 pages.
2. Brustkern, R.L. "An Analytical Treatment of Two-Phase Flow During Infiltration," Ph.D. dissertation, Department of Civil Engineering, Colorado State University, Fort Collins, Colorado March 1970, 105 pages.
3. Noblane, A., "A Capillary Perturbation Study of Two-Phase Flow Infiltration," M.S. Thesis, Department of Civil Engineering, Colorado State University, Fort Collins, Colorado, November 1970, 64 pages.
4. Brustkern, R.L. and H.J. Morel-Seytoux, "Analytical Treatment of Two Phase Infiltration," Jour. of the Hydraulics Division, A.S.C.E., vol. 96, No. Hy 12, December 1970, pp. 2535-2548.
5. Phuc, Le Van and H.J. Morel-Seytoux, "Effect of Airflow on Infiltration Rates," Paper presented at the Annual Meeting of the Soil Science Society of America, Tucson, Arizona, August 1970. Submitted for publication, being revised.
6. Phuc, Le Van and H.J. Morel-Seytoux, "Computer Simulation of Capillary Hysteretic Cycles in Infiltration." Submitted for publication in Proceedings of S.S.S.A., being revised.
7. Noblane, A. and H.J. Morel-Seytoux, "A Perturbation Analysis of Two-Phase Infiltration," submitted to ASCE, Hydraulics Division, December 1970.
8. Morel-Seytoux, H.J., and A. Noblane, "Infiltration Predictions by a Moving Strained Coordinates Method," Accepted for presentation to Symposium on Soil-Water Physics and Technology, Rehovot, Israel, August 19-September 4, 1971 and for publication in the Proceedings.
9. Brustkern, R.L., and H.J. Morel-Seytoux, "Description of Water and Air Movement During Infiltration," submitted to ASCE, Hydraulics Division, January 1971.

ADDITIONAL REFERENCES

10. Hewitt, F. J.M., Editor, "Flow through Porous Media," Chapter XI, "Introduction to Flow of Immiscible Liquids in Porous Media," Academic Press, New York 1969, pp. 455-516.
11. Richards, L.A., "Capillary Conduction of Liquids Through Porous Media," Physics, Vol. 1, pp. 318-333, 1931.

ADDITIONAL REFERENCES - Continued

12. Free, J.R. and V.J. Palmer, "Relationship of Infiltration, Air Movement, and Pore Size in Graded Silica Sand," Soil Sci. Soc. of Amer. Proc., Vol. 5, pp 390-398, 1940.
13. Mc Whorter, D.B., "Infiltration Affected By Flow of Air," Ph. D. dissertation, Department of Agricultural Engineering, Colorado State University, March 1971, 129 pages.
14. Philip, J.R., "The Theory of Infiltration: 2. The Profile at Infinity," Soil Sci. Soc. of Amer. Proc., Vol. 83, No. 6, June, 1967, pp 435-448.